



UTILITY BARS



EW3420 UTILITY BAR 1275mm Spot/Flood Combination

ECCO's combination utility bar utilises exclusive optics to combine a high-intensity Safety Director™ with the powerful illumination output of a worklight. Steady-burn amber mode is ideal for inclement weather and high-dust environments. Brackets included for front- or rear-vehicle mounting. Features include a weather-protected controller connection 12VDC operation, 5-watt LEDs, aluminum housing, polycarbonate lens, and 5 year warranty.

Features and Benefits

- Custom optics designed for dual-light operation
- Steady burn amber mode
- Flood light with Safety Director™
- Dual-mounting options
- IP67 Rated
- SAE Class 1, CA T13

Models

| PART NO. | VOLTAGE | AMPS | LENGTH | CANDELA | BEAM DISTANCE |
|----------|---------|---|----------------|---------------------------------|---------------------------------|
| EW3420 | 12VDC | 10 A (steady burn white) 5 A (steady burn amber) | 50.2" 1275mm | 36,695 (white) 6,500 (amber) | 1250 ft 381m 381ft. 116m |

Flash Patterns


| | |
|--------------------------------|-----------------------|
| LEFT (L) | LEFT SOLID (LS) |
| CENTRE OUT (C) | CENTRE OUT SOLID (CS) |
| RIGHT SOLID (RS) | RIGHT (R) |
| ALTERNATING QUAD FLASH (AQF) | WIG WAG (WW) |
| ALTERNATING SINGLE FLASH (ASF) | STEADY BURN AMBER |

Accessories

ER3420CB
Replacement combination lightbar controller box

ER3420MK
Replacement mounting kit for combination utility bar

EZ3420-CBL
15' Extension harness and cable for EW3420

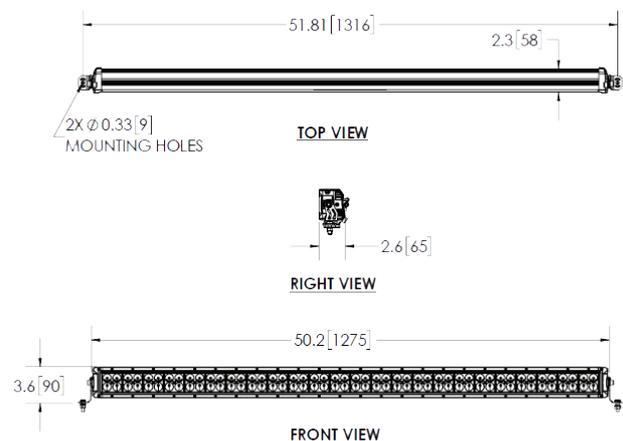

T 1800 815 000 | aftermarket@esg.global

www.ecco.esg.com/au

An ECCO SAFETY GROUP™ Company