
	REVISION HISTORY							
	REV.	DESCRIPTION	DATE					
	03	REVISED PER EB0018	2024-07-30					
Ī	04	REVISED PER EB0018	2024-09-03					
	Α	INITIAL RELEASE PER EB0018	2024-09-13					

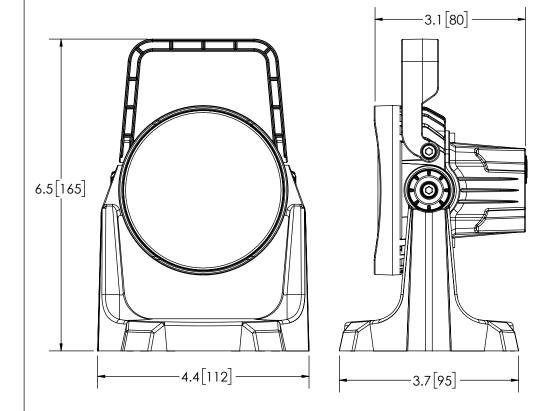

## **SPECIFICATIONS**

1. CERTIFICATIONS: CE 2014/30/EU; UKCA;

Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise specified, the Product Certifications referred to herein are predicated upon the base product model configuration.

- 2. CALCULATED RAW LUMENS: 6000 lumens
- 3. ILLUMINANCE (@ 100 FT): 0.4 lux
- 4. PEAK BEAM INTENSITY: 378 candela
- 5. VOLTAGE (NOMINAL): 5 VDC
- 6. VOLTAGE (EXTREME): N/A
- 7. CURRENT (PEAK): 2.00 A (@ 12 VDC NOMINAL)
- 8. POWER (MAXIMUM): N/A
- 9. TEMPERATURE RANGE: -40°C (-40°F) to 65°C (149°F)
- 10. CONNECTION: USB-C
- 11. MOUNTING: MAGNET MOUNT
- 12. HOUSING MATERIAL: ALUMINUM
- 13. LENS MATERIAL: POLYCARBONATE
- 14. PRODUCT WEIGHT: 1.20LBS (0.54Kg)

## **DISCLAIMER**

DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS, AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ECCO ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT.

## NOTES:

- 1. ROHS COMPLIANT
- 2. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

PROPRIETARY AND CONFIDENTIAL INFORMATION

HIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFTY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR INCINCERSING INSTANTION PURPOSES ONLY. HIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED. COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PROISE CCCO WRITHEN CONSENT, ECCO RESERVES ALL PARTIN, COPYRIGHT, TRADEMARK AND OTHER PROPRIENARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERETO, THIS DRAWING SE SUBJECT TO RECALL BY ECCO ALL ANY TIME, AND YOUR POSSESSION AND PORT OF CONSTITUTES ACCEPTANCE OF THESE

	SCALE 1:2		APP	ROVALS	DATE	<b>&amp;</b>				
	GENERATED DRA		DRAWN BY	BTK	2024-09-03		EC	CCC	www.eccolink	c.com
DO NOT MANUALLY UPDATE.			CHECKED	ABD	2024-09-04	<b>/</b>				
	S ARE IN INCHES, AND S UNLESS OTHERWISE		MECH. ENG.			Americas (800) 635-5900   Europe +44 (0)113 237 5340   Asia Pacific +61 (0)3 63322444				
MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES ± 0.5°	ELEC. ENG.			WORKL	AMP,6	LED,FLOOD,I	ROUND,COMPACT,\	WIREL
XX. ± 1.0mm XX.X ± 0.5mm	X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	FRACTIONS	TEST ENG.	JRT	2024-09-12	CUSTOMER PAR				
		± 1/64	SALES.			EVVZJO	2			
THIRD ANGLE PROJECTION						SIZE: A	DWG. NO	). <b>[</b>	EW2562	REV.
			Electronically Controlled Use Latest Copy		SHEET 1 OF 1	Project: EB0018 Date Created: 2024-05-			Α	
		-			-			-		