


TOP VIEW

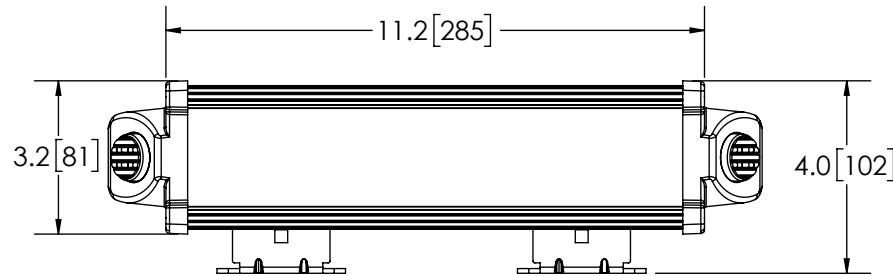

FRONT VIEW

NOTES:

- CABLE NOT SHOWN FOR CLARITY:
6-20 AWG CONDUCTOR CABLE
BLACK- GROUND(-)
RED - POSITIVE(+)
GREEN - CENTER WORKLIGHT(+)
WHITE - WARNING LIGHT(+)
BLUE - FLASH PATTERN SELECT(-), DIM ON WARNING PATTERN ONLY(+)
YELLOW - SYNC
- CABLE DIMENSION IS 30.50 ± 1.00[775 ± 25] FROM CABLE EXIT TO END OF WIRES
- ROHS COMPLIANT
- DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

DISCLAIMER

DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ECCO ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT.

REVISION HISTORY		
REV.	DESCRIPTION	DATE
03	REVISED PER EL0157	2019-11-26
A	INITIAL RELEASE PER EL0157	2020-02-07
B	REVISED PER EL0157	2020-02-18

SPECIFICATIONS

- CERTIFICATIONS: SAE PENDING; IP67
Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: SINGLE : 75 ± 5 FLASHES PER MINUTE
SINGLE : 375 ± 5 FLASHES PER MINUTE
DOUBLE : 75 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12-24 VDC
- VOLTAGE (EXTREME): 9.0-32 VDC
- CURRENT (PEAK): 3.26A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 41.7W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -40°F (-40°C) TO 158°F (70°C)
- CONNECTION: 6-20 AWG CABLE
- MOUNTING: BRACKET MOUNT
- BASE MATERIAL: ALUMINUM
- LENS MATERIAL: POLYCARBONATE, UV STABILIZED
- PRODUCT WEIGHT: 4.12 LBS (1.85 Kg)

COLOR CHART	
FGS. NO.	COLOR
ED9215AW	AMBER/WHITE
ED9215BW	BLUE/WHITE
ED9215RB	RED/BLUE
ED9215RW	RED/WHITE

PROPRIETARY AND CONFIDENTIAL INFORMATION
THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERETO. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2019 ELECTRONIC CONTROLS COMPANY

SCALE 1:4	APPROVALS	DATE
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: 01	DRAWN BY ART	2020-02-07
	CHECKED MDH	2020-02-10
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:	MECH. ENG.	
MILLIMETERS DECIMALS XX. ± 1.0mm XX.X ± 0.5mm	ELEC. ENG.	
INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	TEST ENG.	
ANGLES ± 0.5°	SALES MD	2020-02-10
FRACTIONS ± 1/64		
THIRD ANGLE PROJECTION		

ECCO® www.eccolink.com
Americas (800) 635-5900 | Europe +44 (0)113 237 5340 | Asia Pacific +61 (0)3 63322444

135 DEG WARN-WORK LIGHT COMBO, 12-24V

CUSTOMER PART NO.
SEE CHART

SIZE: A	DWG. NO. ED9215XX	REV. B
Electronically Controlled Use Latest Copy		
SHEET 1 OF 1	Project: EL0157	Date Created: 2019-10-04