



## BEACONS




### 7460 Profile™ SAE Class I LED

The compact and unobtrusive 7460 Series LED beacon incorporates a simple, yet highly effective and robust, design featuring an overhead heatsink that also allows removal of the flange when the unit is pipe-mounted. The 7460 features a Pulse8 flash pattern that human vision is highly sensitive to in the periphery, increasing potential visibility where vehicle hazards are not in direct line of sight. A 5-year warranty and the usual maintenance-free, low amp draw benefits of LED technology make this an ideal light for any application.

#### Models

PART NO.	VOLTAGE	AMPS	FPM	LENS/ILLUMINATION	MOUNT
7460X	12-36	3.6	80	Specify Color	3 Bolt Flange/1" Pipe
7460CX	12-36	3.6	80	Clear/Amber	3 Bolt Flange/1" Pipe
7460X-VM	12-36	3.6	80	Specify Color	Vacuum Magnet
7460CX-VM	12-36	3.6	80	Clear/Amber	Vacuum Magnet

Replace X in part number with desired color: A=amber, B=blue, C=clear, G=green, R=red

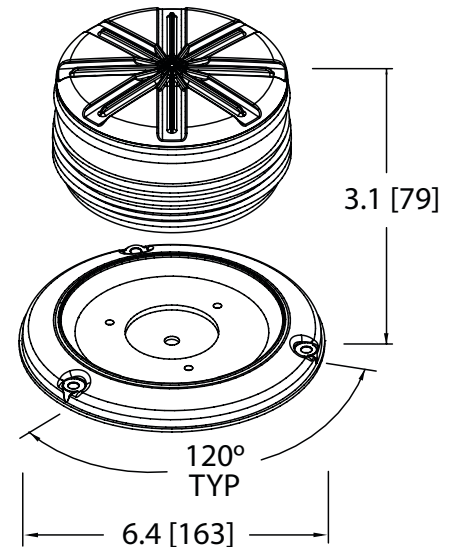

#### Features and Benefits

- Eight 3-watt LEDs and a parabolic reflector
- Pulse8 (eight flash per cycle) flash pattern
- Overhead heatsink design allows for unobtrusive pipe mounting with flange removed
- Temperature Range: -22°F to +122°F (-30°C to +50°C)

#### Parts & Accessories

- Pipe Mount:  
A6400MB

Detachable flange design allows easy and unobtrusive pipe mounting

