


## FSL-700-BLE Electric Lock Datasheet

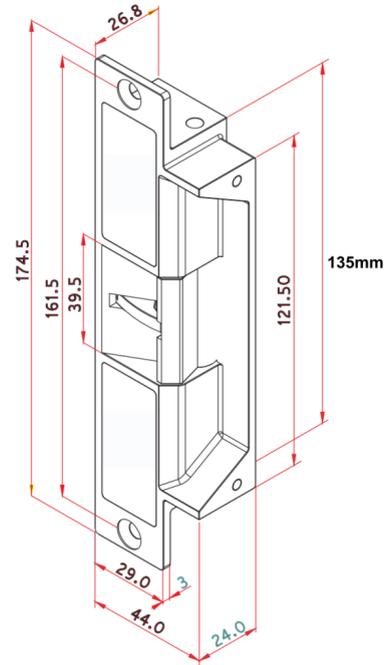

### Features

- Changeable between fail-safe and fail-secure
- Long life solenoid
- Max. latch throw: 15mm
- 12Vdc operating voltage
- For wooden frame and metal frame doors

### Specifications

- Operating voltage: **12Vdc only**
- Current draw: 100mA/12Vdc
- Operating Temperature: -10~+45degC
- Humidity: 0~95% non-condensing
- Up to 1,000,000 cycles test (solenoid)
- Jaw strength: 680Kg pull testing
- Bluetooth v4.2 and Bluetooth LE

### Optional Accessories

- 50mm lip (FSL-LP750-050)
- 25mm lip (FSL-LP750-025)

### Wiring Diagram

Power Input	Constant 12Vdc	+ Red (pos) - Black (neg)
Exit Button	Dry Input	Green Green
Legacy Lock Supply	12Vdc Trigger	+ White (pos) - Blue (neg)