



# Figaroll Plus

# Figaroll Plus


Figaroll Plus  
 280-320 mm  
 5 m  
 ca. 50%  
 ca. 150 cm<sup>2</sup>/m  
 1 jm  
 E (EN 13501-1)  
 Paigaldustemperatuur +5°C kuni +40°C

Figaroll Plus  
 280-320 mm  
 5 m  
 ca. 50%  
 ca. 150 cm<sup>2</sup>/m  
 1 jm  
 E (EN 13501-1)  
 Paigaldustemperatuur +5°C kuni +40°C

## TEENI LÕHES

### ÄNCHÕL

Ü	280 – 320 mm
R	5 m
Ī	ca. 50%
Ū	ca. 150 cm <sup>2</sup> /m
Ī	1 jm
÷	E (EN 13501-1)
Paigaldustemperatuur	+5°C kuni +40°C

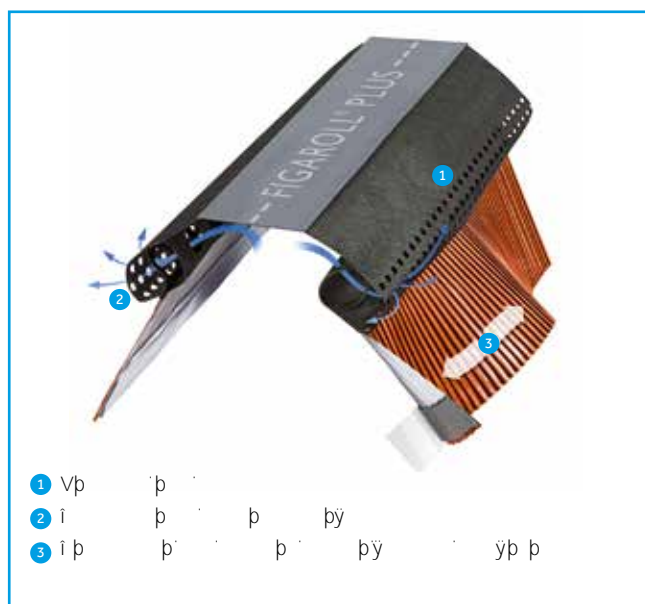

## Ó EIDĀÇÖ÷ÈÖ÷Ī ÈIÇÄĪ ÷

- 280 – 320 mm
- 50%
- 150 cm<sup>2</sup>/m
- 1 jm
- UV-stabiilne toode
- Ventileeritud aluskonstruktsioon tagab katuse pika eluea



## ÄRITÄ

6 275 560      7 390 128

Ū