


# Skala

Rectangular pole  
base plate

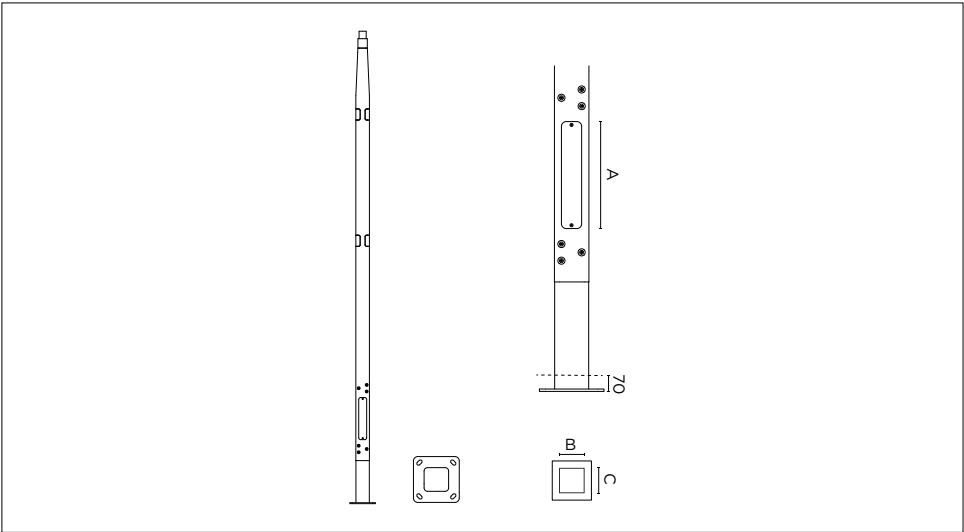

Pole on base plate	Height	Section	Base section	Top section	Visible base height	Effective dimensions (A x B • C)	Weight
MSK1350	3,5 m	□ 145-140 mm	□ 145-140 mm	□ 90-140 mm	0,45 m	400 x 75 mm • 90 mm	58 kg
MSK1400	4 m	□ 145-140 mm	□ 145-140 mm	□ 90-140 mm	0,45 m	400 x 75 mm • 90 mm	63 kg
MSK1500	5 m	□ 145-140 mm	□ 145-140 mm	□ 90-140 mm	0,45 m	400 x 75 mm • 90 mm	72 kg

### Technical description

Rectangular pole made of solid Accoya® wood sourced from sustainably managed forests (FSC).  
Accoya grade A1, bending strength C22.  
Use Class 4 (UC4) according to EN 335, Durability Class 1 (DC1) according to EN 350.  
Wood modified through an acetylation process and certified Cradle-to-Cradle Gold. Four-step staining process with water-based stains. Stain durability > 10 years.  
Fire-retardant treatment available upon request.  
Galvanized steel base, polyester powder-coated. Seawater atmosphere protection available upon request.



### Lifespan

The estimated lifespan of the product exceeds 25 years.  
Accoya® wood offers a 25-year warranty in contact with the ground or in freshwater, and 50-year warranty for above-ground applications.

### Maintenance and lifespan

In order to maintain the performance of the columns and their aesthetics, it is advisable to plan periodic maintenance of the wood every 8 years (6 years on sites exposed to the sea front) by renewing the finish. This operation does not require any particular expertise or removal of the columns. AUBRILAM can assist you in this process by providing a staining kit with the application protocol.  
It is recommended to regularly clean metal surfaces with soapy water. Make sure to use non-aggressive products. Never use corrosive products or scouring pads.  
Annual inspection: Check the condition of the access door(s), the base, and the anchoring rods. Unclog the water drainage holes and ensure there are no signs of oxidation on the metal parts.

### Installation

Spacing dimensions:  
200 x 200 mm  
**Recommended anchor rods:**  
4 HA20/M18 - 400 mm

Anchor bolts supplied on request only.

### Options














- Stainless steel base
- Hinged door or door with safety-cable
- Two doors
- Anti-theft screw
- Cable hole

### Customization

Customization available upon request.

### Finish

The finish shown is in Brume wood and Black 2100 sanded metal, **code +.W01.M05**. Finish options available in any of the standard shades from the AUBRILAM color chart. Other colors available upon request.

Wood			
			
Brume <b>code+.W01</b>	Cooper <b>code+.W02</b>	Tyrol Pine <b>code+.W03</b>	Chestnut <b>code+.W04</b>
			
Ferrara Oak <b>code+.W05</b>	Basalt <b>code+.W06</b>	Meteor <b>code+.W07</b>	Origin <b>code+.W08</b>
			
Alizé <b>code+.W09</b>	La Mer <b>code+.W10</b>	Burn Umber <b>code+.W11</b>	
Metal			
			
Graphite <b>code+.M01</b>	Silver <b>code+.M02</b>	RAL 7006 sanded <b>code+.M03</b>	Grey 2900 sanded <b>code+.M04</b>
			
Black 2100 sanded <b>code+.M05</b>	Black 2200 sanded <b>code+.M06</b>	Random rust <b>code+.M50</b>	Crystal black <b>code+.M51</b>