


Rendez-vous

FRV0004

Bench - 2 small seats / 1 back

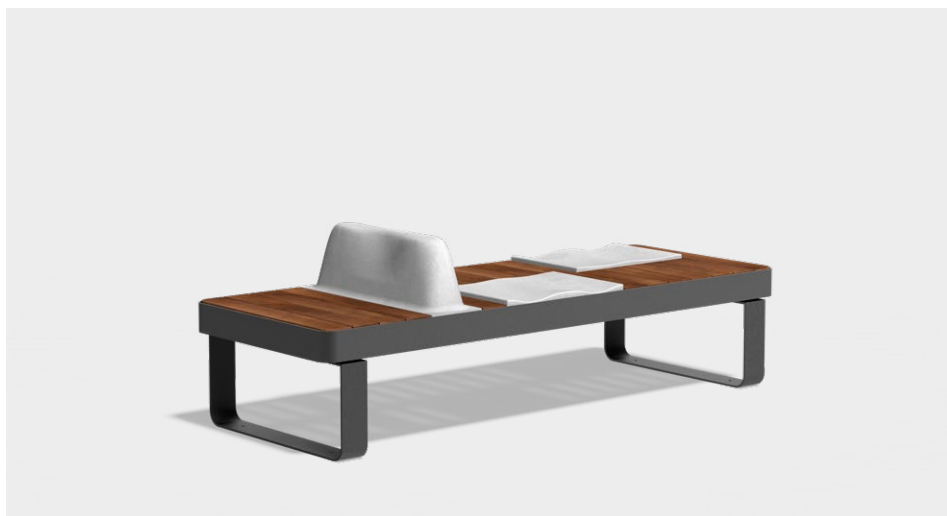

Technical description

Bench made of solid Accoya® wood sourced from sustainably managed forests (FSC).

Accoya grade A1, bending strength C22. Use Class 4 (UC4) according to EN 335, Durability Class 1 (DC1) according to EN 350. Wood modified through an acetylation process and certified Cradle-to-Cradle Gold. Four-step staining process with water-based stains. Stain durability > 10 years.

Fire reaction class EUROCLASS D-s2, d0 according to EN 13501-1 standard. Class B-s1, d0 available on request with fire-retardant treatment. Anti-scratch or anti-graffiti treatment available on request.

Structure made of electrogalvanized steel, polyester powder-coated. Seats and armrests made of high-performance concrete and protected by a BF 24H type sealer. Seawater atmosphere protection available upon request.



Dimensions: 2,010 × 750 mm • H 430 mm

Seat height: 430 mm

Seat: 520 × 365 mm

Backrest: 730 × 205 mm • H 225 mm

Weight: 133 kg

Technology

Option to integrate a standard charging module:

- Up to a maximum of 4 charging points;
- Each with USB 2 type A - 5V - 1A - 5W;
- Mounting in a metal housing.

Lifespan

The estimated lifespan of the product exceeds 25 years.

Accoya® wood offers a 25-year warranty in contact with the ground or in freshwater, and 50-year warranty for above-ground applications.

Maintenance and lifespan

In order to maintain the performance of the products and their aesthetics, it is advisable to plan periodic maintenance of the wood every 15 years (10 years on sites exposed to the sea front) by renewing the finish.

This operation does not require any particular expertise or removal of the products. AUBRILAM can assist you in this process by providing a staining kit with the application protocol. It is recommended to regularly clean metal surfaces with soapy water. Make sure to use non-aggressive products. Never use corrosive products or scouring pads. Once a year, check that there are no signs of oxidation on the metal parts.

Installation

Ground fixation recommended. Chemical sealing.

Fixing with Anchor rods M10 x80, supplied only on request.

Fixation hole: 12 mm












Customization

Customization available upon request.









Finish

The finish shown is in Brume wood and Black 2100 sanded metal. **code+.W01.M05**. Finish options available in any of the standard shades from the AUBRILAM color chart. Other colors available upon request.

Wood

 Brume code+.W01	 Cooper code+.W02	 Tyrol Pine code+.W03	 Chestnut code+.W04
 Ferrara Oak code+.W05	 Basalt code+.W06	 Meteor code+.W07	 Orign code+.W08
 Alizé code+.W09	 La Mer code+.W10	 Burnt Umber code+.W11	

Metal

 Graphite code+.M01	 Silver code+.M02	 RAL 7006 MFT code+.M03	 Grey 2900 sanded code+.M04
 Black 2100 sanded code+.M05	 Black 2200 sanded code+.M06	 Random rust code+.M50	 Crystal black code+.M51

