


Solea

FSL5000
Square planter

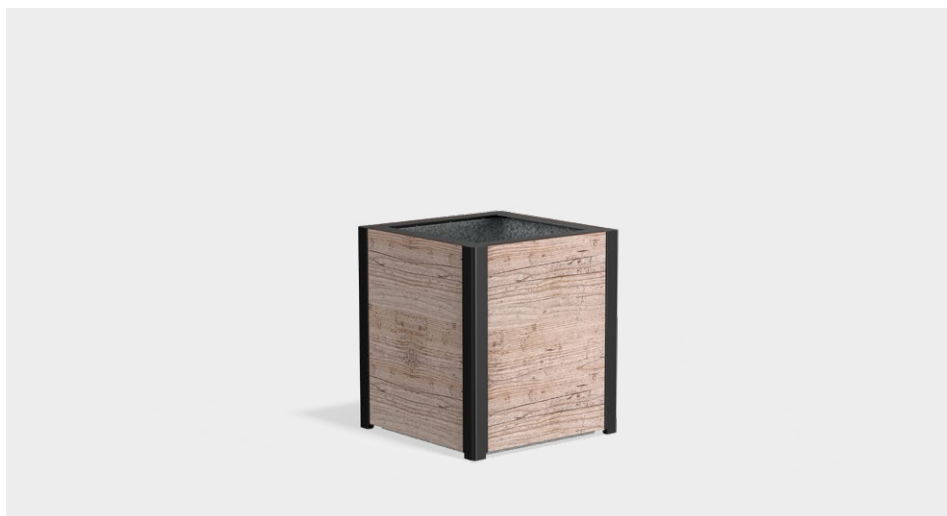

Technical description

Square planter made of High-Pressure Compact Laminate (HPL) according to EN 438-6 standard. Composed of 65% natural wood fibers from sustainably managed forests, certified FSC or PEFC. 12 mm thickness with double-sided 0.8 mm laminate veneer. Weather-resistant (EN 4892-2), UV-resistant (EN 4892-3), scratch- and impact-resistant (EN 178).

Fire reaction class EUROCLASS B-s2, d0 according to EN 13501-1 standard.

Structure made of electrogalvanized steel, polyester powder-coated.

Seawater atmosphere protection available upon request.

Dimensions: □ 555 mm • H 617 mm

Capacity: 130 liters

Weight: 43.2 kg

Lifespan

The estimated lifespan of the product exceeds 25 years.

Depending on usage, the lifespan of HPL is estimated to exceed 50 years.

Maintenance and lifespan

In order to maintain the performance of the products and their aesthetics, it is advisable to clean HPL with hot water and mild soap (organic solvents such as acetone, alcohol, or turpentine if necessary) using a soft sponge; wipe and dry with a non-abrasive absorbent cloth. Refer to the manufacturer's instructions for more details.

It is recommended to regularly clean metal surfaces with soapy water. Make sure to use non-aggressive products. Never use corrosive products or scouring pads. Once a year, check that there are no signs of oxidation on the metal parts.

Installation

No floor fixation required.

Customization

Customization available upon request.

Finish

The finish presented is in compact laminate 0801NT Fir Platinum and Black 2200 sanded metal, code +.H01.M06. Metallic finish options available in any of the standard shades from the AUBRILAM color chart. Other colors available upon request.

High pressure laminate

			
Fir Platinum code+.H01	Enigma code+.H02	Voyager code+.H03	Taurus code+.H04

Smoked
Walnut
code+.H05

Metal

			
Graphite code+.M01	Silver code+.M02	RAL 7006 MFT code+.M03	Grey 2900 sanded code+.M04

Black 2100
sanded
code+.M05

Black 2200
sanded
code+.M06

