

SOLEA Windscreen FSL6001



Materials

Electro-galvanized steel frame, finished in powder coated polyester. Clear laminated glass, 55 2 thick.

Standard finish

Metal: Black 2200 sanded
Finish corresponding to the reference FSL6001.
Other colours on request.

Fixing



Installation on finished floor. Must be fixed to the ground on a concrete sill, size 40 x 40 cm.
Anchor bolts: threaded bolts M12 x 250.
Anchor bolts supplied on request only.

Benefits, lifespan and maintenance

Sleek, functional and robustly designed furniture. Materials tested for outdoor use. S235 quality steel with good mechanical properties. Furniture delivered flat-packed, easy to assemble. Easily replaceable parts. Simple cleaning (water + soap).

Customisation

Installation of a sticker or signage on request.

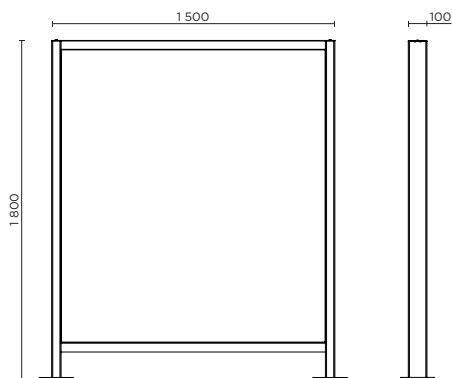

	Frame H x L x W	Hole for fixing on leg	Anchor bolts	Weight
FSL6001	1800 x 1500 x 100 mm	Ø 10 mm	M12 x 250	100 kg

Design
by
AUBRILAM.