

DATASHEET

ECOLAN® Distribution Panel 19" 1U 24-Port shifted



ECOLAN®



Description

ECOLAN® Unshielded distribution panel 19" for holding up to 24 RJ45 keystone modules
 Ports have no keystone format
 ANSI/TIA-568-C.2 and ISO/IEC 11801 Cat.6A certified by ETL
 Steel frame with (ABS+PC) plastic frontcover
 Compatible to each UTP Keystone from EFB-Elektronik
 Alien NEXT optimized for the E-20085 keystone due to shifted 24-port layout
 Inclusive cable management
 Strain relief via cable tie
 Delivery without modules

The E-20085 Keystone is Cat.6_A certified only in combination with this distribution panel

General data

Number of height units	1
Type of plug-in connector system	RJ
With buses/couplings	False
EMC-version	False
Material	SPCC Steel, 1.5mm

Mechanical characteristics

Height	44.4 mm
Width	482.6 mm
Depth	124.85 mm

Available variants

Article no.	Title	Number of connector holes	Suitable for adapter	RAL number	Colour	Remark
37589.1	ECOLAN® Distribution Panel 19" 1U, 24-Port shifted, ANEXT optimized, black	24	Keystone	9005	deep black	shifted arrangement


This datasheet was created automatically on 01-12-2020 . Technical changes reserved.



DATASHEET

ECOLAN® Distribution Panel 19" 1U 24-Port shifted

Technical drawings

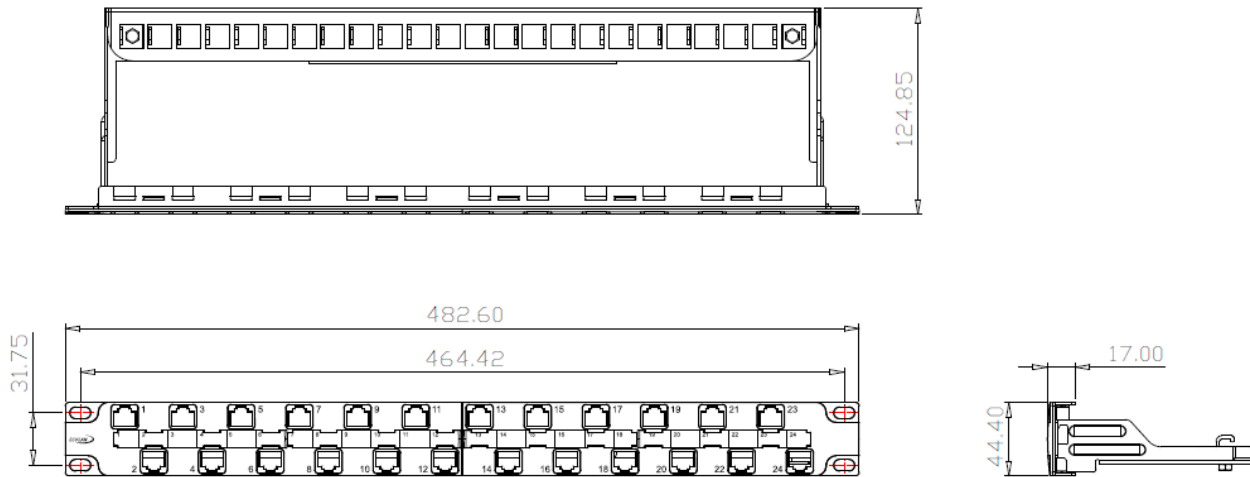

This datasheet was created automatically on 01-12-2020 . Technical changes reserved.

