


FIBER OPTIC PIGTAIL SET LC/PC 50/125 OM3 LSZH

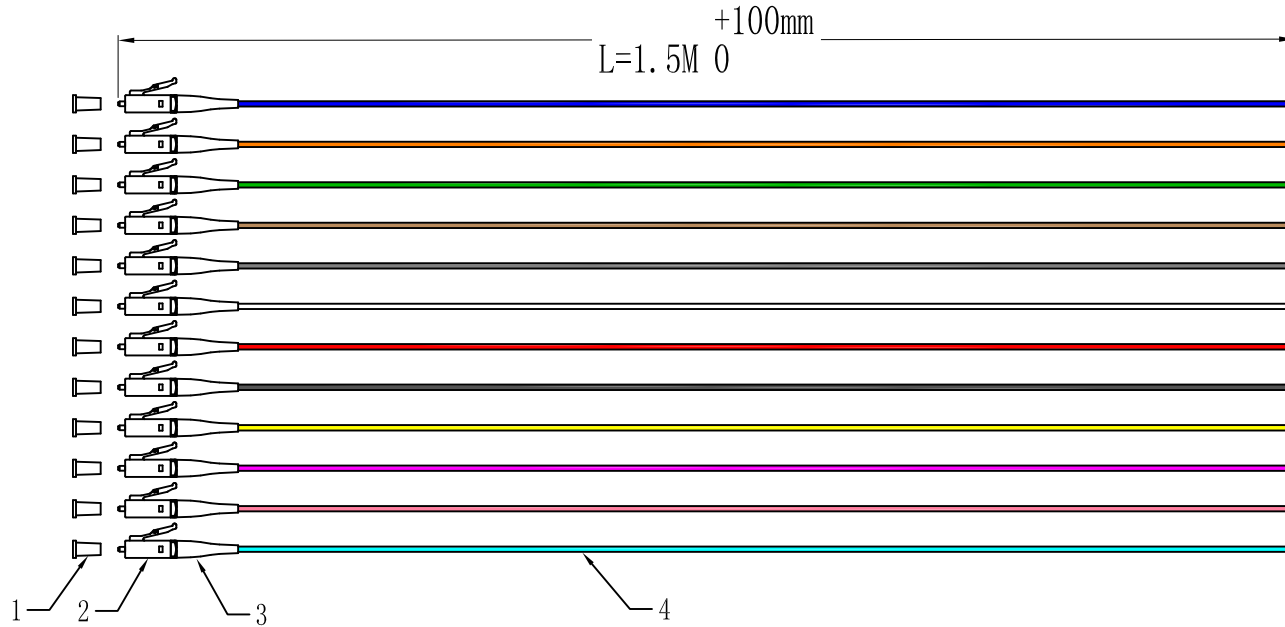

Grade A

Specifications:

- 1.Insertion Loss:<0.25dB @850
Return Loss:>20dB @850nm
- 2.End surface test is according to OP-03-05001
- 3.Test standard:GR-326-CORE
- 4.Test report has to match the serial No.
- 5.RoHS compliant
- 6.Fiber cable according to IEC 60793-2
- 7.LC connector according to IEC61754-20


4	Ø0.9mm OM3 simplex 50/125u LSZH 12 colors cable	
3	LC 0.9 boot, White color	1
2	LC/PC 0.9 connector, Beige color	1
1	LC Dust cap,Transparent	1
Item	Description	Qty

UNIT	mm	PAGE	1/3	MODEL	Pigtail
SCALE	--	DRAW		DRAW NO.	O3482TB.1.5
MAT.		CHECK		NAME	12 colors LC/PC pigtail
DATE	16-Aug-18	APPR.		MAT_NO.	O3482TB.1.5


VIEW

Packing:

The corresponding lable data for each cable assembly shall be affixed to the package

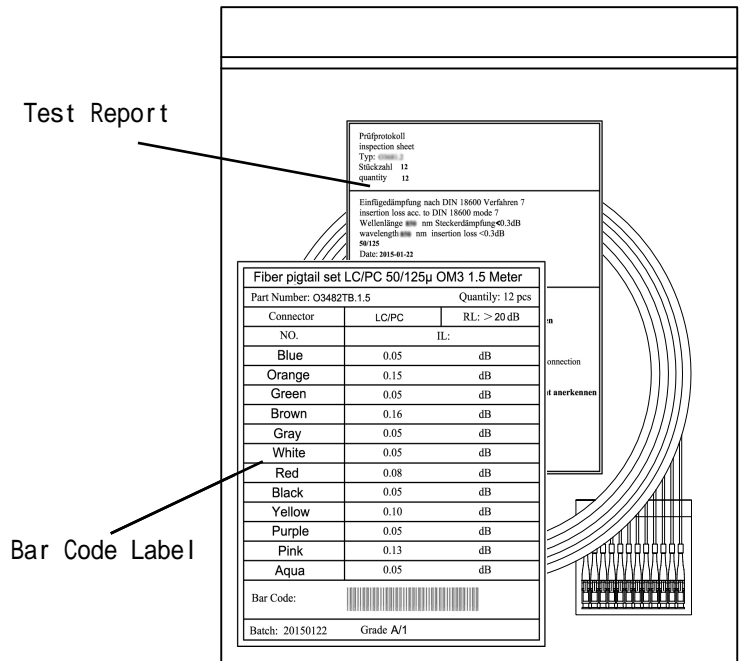


PE Bag(150mm x 140mm)

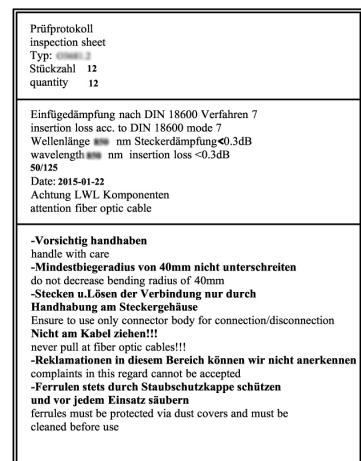


Test Report

Fiber pigtail set LC/PC 50/125μ OM3 1.5 Meter		
Part Number: O3482TB.1.5		Quantity: 12 pcs
Connector	LC/PC	RL: > 20 dB
NO.		IL:
Blue	0.05	dB
Orange	0.15	dB
Green	0.05	dB
Brown	0.16	dB
Gray	0.05	dB
White	0.05	dB
Red	0.08	dB
Black	0.05	dB
Yellow	0.10	dB
Purple	0.05	dB
Pink	0.13	dB
Aqua	0.05	dB

Bar Code: 
Batch: 20150122 Grade A/1

Bar Code Label(80mm x 100mm)

UNIT	mm	PAGE	2/3	MODEL	Pigtail
SCALE	--	DRAW		DRAW NO.	O3482TB.1.5
MAT.		CHECK		NAME	12 colors LC/PC pigtail
DATE	13-Aug-18	APPR.		MAT_NO.	O3482TB.1.5



Indoor Cable Series(Simplex)

1. Characteristics

- . Aramid yarn strength member ensures tension resistance and long term stability in transmission
- . Small outer diameter, lightweight
- . Flame-retardant jacket, halogen-free
- . Low attenuation

2. Applications

- . Installation in conduits and shafts
- . Indoor distribution
- . Jumper and adapter cable
- . Connecting workstations inside buildings (FTTD)

3. Temperature Range


-20°C up to +70°C

4. Fiber Optic Cable Performance

- . Number of fibers: 1
- . Outer diameter: 0.9 mm
- . Max. tension: 6.0N (short-term)
3.0N (long-term)
- . Min. Bending Radius: 20D (Dynamic)
10D (Static)

5. Cable Specification

- . Fiber type: Multimode 50/125µm
- . 12 colors jacket, LSZH

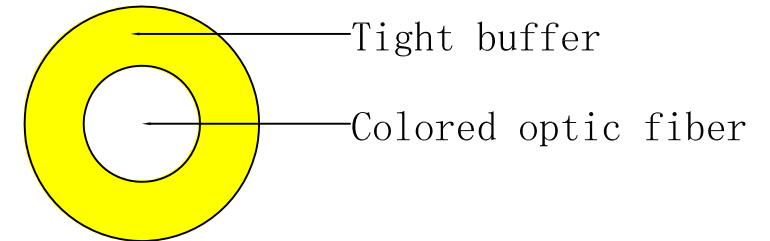

UNIT	mm	PAGE	3/3	MODEL	Pigtail
SCALE	--	DRAW		DRAW NO.	O3482TB.1.5
MAT.		CHECK		NAME	12 colors LC/PC pigtail
DATE	13-Aug-18	APPR.		MAT_NO.	O3482TB.1.5

VIEW