

DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 10m, blue



General data

The shielded Cat.6A RJ45 patch cable with **component certification** from the GHMT ensures excellent performance for 10 Gigabit Ethernet applications. The **TPE** outer sheath makes the cable **highly flexible** and thus easier to handle. The moulded grommet captivates with its **slim design** and thus simplifies the insertion process in cramped conditions.

Very flexible TPE/LSZH outer sheath superflex

Cross section 4 x 2 x AWG26 / 7

Moulded grommet, slim design

Length imprint on the boot

Allgemeine Daten

Connector type	RJ45 Standard blue
Colour anti-kink sleeve	blue
Suitable for degree of protection (IP)	IP20
Cable type	S/FTP
Pin assignment	1:1
Locking lever	True
Fire retardant version	True

This datasheet was created automatically on 29-03-2023 . Technical changes reserved.



DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 10m, blue

Model	Shielded
Allocation	acc. TIA/EIA 568B
Area of Application	Industrial Ethernet
Length imprint	True
Anti-kink sleeve	plugged in
Category	6A (IEC)
Current Rating	max. 1 A
Contacts	50 µ" gold plated
Colour outer sheath	blue
Material outer sheath	TPE/LSZH
Halogen free	True

Mechanische Eigenschaften

Conductive shield	360° shield contact
Bending radius	>32.5 mm
Mating cycles	2000

Kabelaufbau

Raw cable	Cat.7
Type of connector connection 2	RJ45 8(8)
Type of connector connection 1	RJ45 8(8)
Conductor Material	Copper
AWG-size	26/7
Cable construction	4x2

Kabelmantel

Outer diameter of the cable	6.5 mm
Oil resistant (according to EN 60811-404)	False
Halogen-free	yes
Printing	Cat.6A Patchcord SUPERFLEX S/FTP
Silicone-free	True
Low smoke	acc. IEC61034

Umgebungsbedingungen

Temperature range	-20 - 75 °C
-------------------	-------------

This datasheet was created automatically on 29-03-2023 . Technical changes reserved.



DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 10m, blue

Elektrische Eigenschaften	
Resistance unbalance	2 %
Loop resistance	284 Ω/km
Conductor resistance DC	142 Ω/km
NVP value	- %
Test voltage	1000 V DC, 1min
Contact Resistance	30 mΩ
POE class	PoE+ acc. to IEEE802.3at
Operating-/ tempering voltage	max. 50 V DC
Insulation Resistance	100 MΩ
Impedance	100 ±25 Ω

Übertragungstechnische Eigenschaften	
Transmission	10Gbit
Bandwidth	500MHz

Normen, Zulassungen, Zertifizierungen	
Cabling standard	EN50173
Oil resistant (acc. EN 60811-2-1)	False
Connector	IEC 60603-7-51

Available variants		
ArtNr.	Bezeichnung	Length Längentoleranz
K5525FBL.0,15	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 0,15m, blue	0.15 m ±5 %
K5525FBL.0,25	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 0,25m, blue	0.25 m ±5 %
K5525FBL.0,5	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 0,5m, blue	0.5 m ±5 %
K5525FBL.1	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 1m, blue	1.0 m ±5 %
K5525FBL.1,5	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 1,5m, blue	1.5 m ±5 %
K5525FBL.2	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 2m, blue	2.0 m ±5 %
K5525FBL.3	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 3m, blue	3.0 m ±5 %
K5525FBL.5	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 5m, blue	5.0 m ±5 %
K5525FBL.7,5	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 7,5m, blue	7.5 m ±5 %
K5525FBL.10	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 10m, blue	10.0 m ±5 %
K5525FBL.15	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 15m, blue	15.0 m ±5 %
K5525FBL.20	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 20m, blue	20.0 m ±5 %
K5525FBL.25	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 25m, blue	25.0 m ±5 %

This datasheet was created automatically on 29-03-2023 . Technical changes reserved.





DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 10m, blue

K5525FBL.30 | RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 30m, blue | 30.0 m ±5 %

Drawings

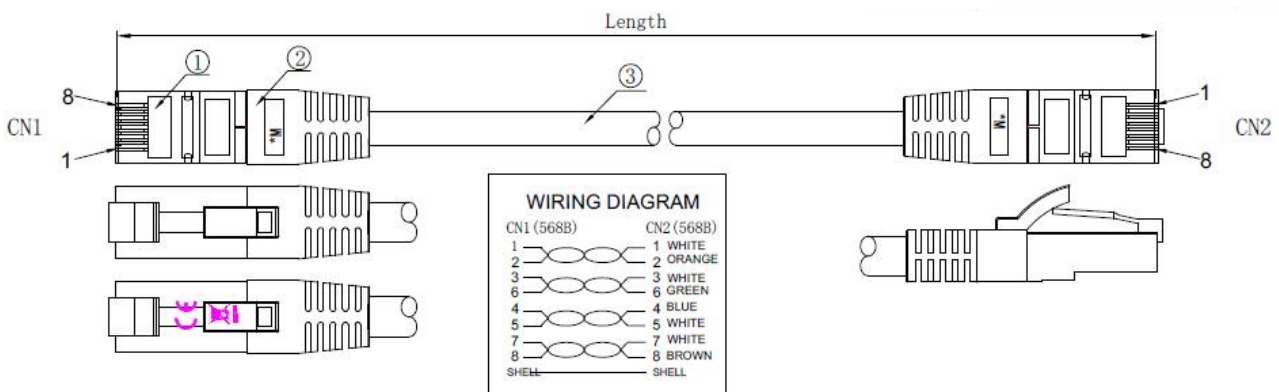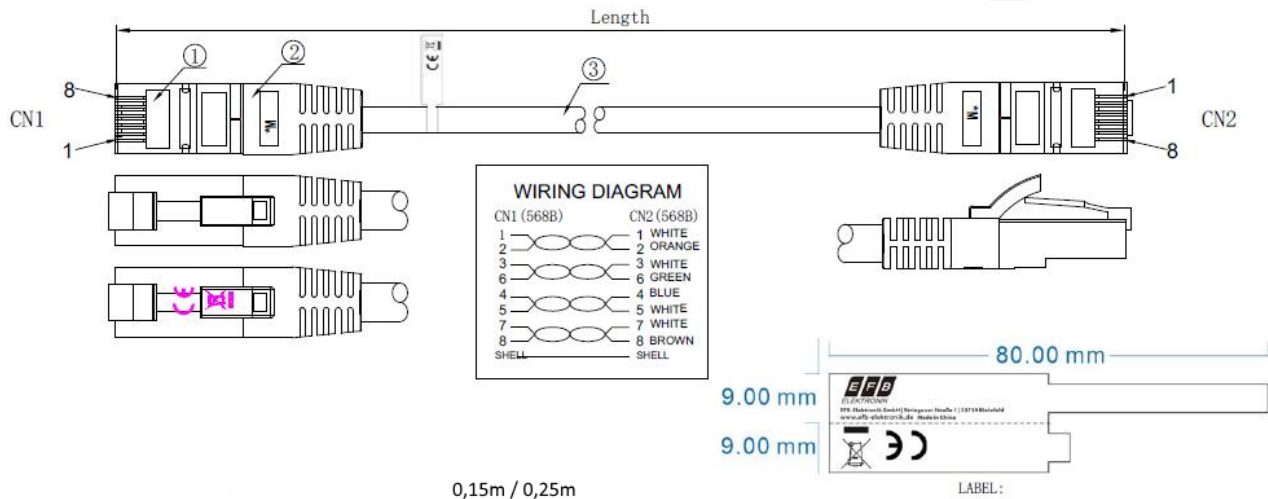

This datasheet was created automatically on 29-03-2023 . Technical changes reserved.

