



DATASHEET

RJ45 Flat Patch Cord Cat.6A U/FTP PVC white 0,25m

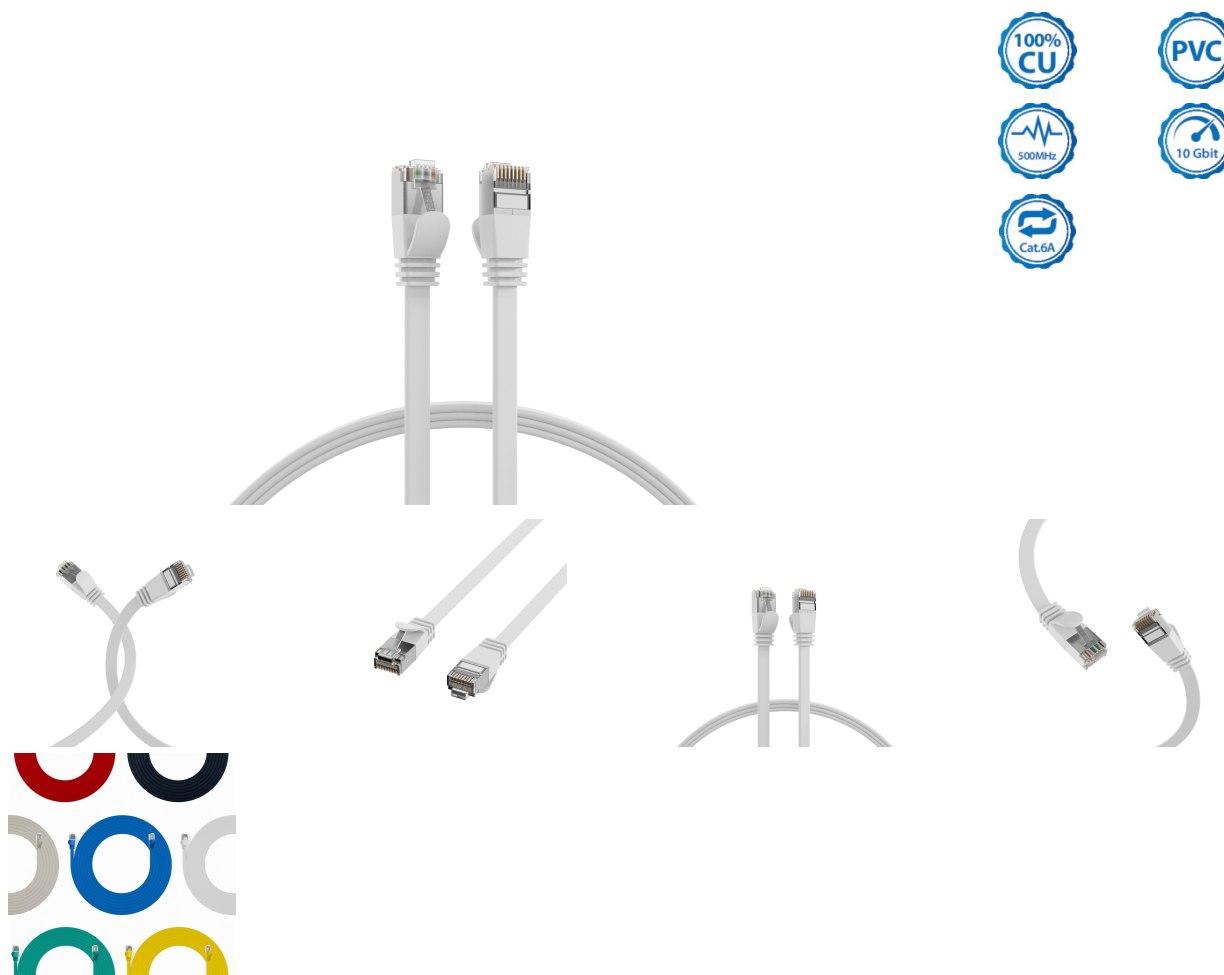

General data

The Cat.6A (TIA) LAN cable from EFB-Elektronik transmits data up to 10Gbit. The U/FTP shielding reliably protects against interference and ensures high-quality signals. Because it is a Cat.6A (TIA) Ethernet cable, it offers a frequency range of up to 500MHz, which provides high data transmission performance.

- Space-saving cabling – the flat cable enables kink-free installation in confined spaces.
- Cover fire protection requirements in compliance with standards – flame-retardant cable behaviour according to IEC60332-1 reduces the spread of fire in the event of a fault and supports compliance with common installation specifications.
- Supply and connect end devices via one cable – reduces cabling effort because data and power are transmitted via PoE+ according to IEEE802.3at on a single line. PoE+ according to IEEE802.3at can only be used up to certain cable lengths.

Product Description

This datasheet was created automatically on 28-05-2026 . Technical changes reserved.



DATASHEET

RJ45 Flat Patch Cord Cat.6A U/FTP PVC white 0,25m

This data cable offers improved interference resistance at the pair level (U/FTP) - individually foil-shielded wire pairs reduce crosstalk, increase data security, and ensure stable high-speed transmission. It can be used in a temperature range of -20 - 60 °C. The wide range of possible applications is supported by the bending radius of >20 mm. The Ethernet cable has an IP20 rating. The polyvinyl chloride (PVC) jacket is a flexible standard jacket for network applications, without special fire protection properties.

Technical details

- Cat.6A (TIA)
- Connector: RJ45 8(8) to RJ45 8(8) with extra-short RJ45 connectors
- Shielding: U/FTP cable with 4x2 x AWG30/7
- Cable shape: flat
- Pin assignment: 1:1 according to TIA/EIA 568B
- Corresponds to PoE class: PoE according to IEEE802.3af and PoE+ according to IEEE802.3at
- Gold-plated contacts
- Sheath: Polyvinyl chloride (PVC) sheath material
- External dimensions of the cable: 7.0*2.2 mm
- With an injected anti-kink grommet
- Fire protection: flame-retardant according to IEC60332-1
- Degree of protection: IP20
- With a punctual screen contact
- With locking lever protection
- Mating cycles: ≥750
- Brand: EFB-Elektronik

Technical properties

AWG-size	30/7
Allocation	acc. TIA/EIA 568B
Anti-kink sleeve	moulded-on
Area of application	Industrial Ethernet
Bending radius	>20 mm
Cable construction	4x2
Cable shape	flat
Cable type	U/FTP
Cabling standard	EN50173
Category	6A (TIA)
Colour anti-kink sleeve	white
Colour outer sheath	white
Conductive shield	Selected shield contact
Conductor Material	Copper
Conductor resistance DC	376 Ω/km
Connector	IEC 60603-7-51
Connector type	RJ45 short version

This datasheet was created automatically on 28-05-2026 . Technical changes reserved.



DATASHEET

RJ45 Flat Patch Cord Cat.6A U/FTP PVC white 0,25m

Contacts	Vergoldet
Current capacity	max. 1 A
Fire retardant version	acc. IEC60332-1
Halogen free	False
Harmonised Standard	EN 50575
Impedance	100 ±15 Ω
Insulation Resistance	100 MΩ
Jacket material	Polyvinyl chloride (PVC)
Length imprint	False
Locking lever	True
Loop resistance	752 Ω/km
Mating cycles	≥750
Model	shielded
NVP value	76 %
Oil resistant	no
Operating Temperature	-20 - 55 °C
Operating-/ tempering voltage	max. 50 V DC
Outer diameter of the cable	7.0*2.2 mm
Ozone resistance	No
Pin assignment	1:1
Printing	SLISLIM PATCHCABLE U/FTP CAT.6A ***10GE***
Resistance unbalance	< 4 %
Resistant to chemicals	False
Silicone-free	True
Suitable for degree of protection (IP)	IP20
Tape width	500MHz
Test voltage	1000 (V DC, 1min) core/core und core/screen
Transmission	10Gbit
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)
UL approbated	False
UV resistant	no

Available variants

ArtNr.	Bezeichnung	Length POE class	Length tolerance
--------	-------------	------------------	------------------

This datasheet was created automatically on 28-05-2026 . Technical changes reserved.



DATASHEET

RJ45 Flat Patch Cord Cat.6A U/FTP PVC white 0,25m

K5545WS.0,15	RJ45 Flat Patch Cord Cat.6A U/FTP PVC white 0.15m	0.15 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
K5545WS.0,25	RJ45 Flat Patch Cord Cat.6A U/FTP PVC white 0,25m	0.25 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
K5545WS.0,5	RJ45 Flat Patch Cord Cat.6A U/FTP PVC white 0,5m	0.5 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
K5545WS.1	RJ45 Flat Patch Cord Cat.6A U/FTP PVC white 1m	1.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
K5545WS.1,5	RJ45 Flat Patch Cord Cat.6A U/FTP PVC white 1,5m	1.5 m	PoE acc. to IEEE802.3af	±5 %
K5545WS.2	RJ45 Flat Patch Cord Cat.6A U/FTP PVC white 2m	2.0 m	PoE acc. to IEEE802.3af	±5 %
K5545WS.3	RJ45 Flat Patch Cord Cat.6A U/FTP PVC white 3m	3.0 m	PoE acc. to IEEE802.3af	±5 %
K5545WS.5	RJ45 Flat Patch Cord Cat.6A U/FTP PVC white 5m	5.0 m	PoE acc. to IEEE802.3af	±5 %

This datasheet was created automatically on 28-05-2026 . Technical changes reserved.

