


DATASHEET

Connecting module Cat.6 250MHz with IDC - terminal

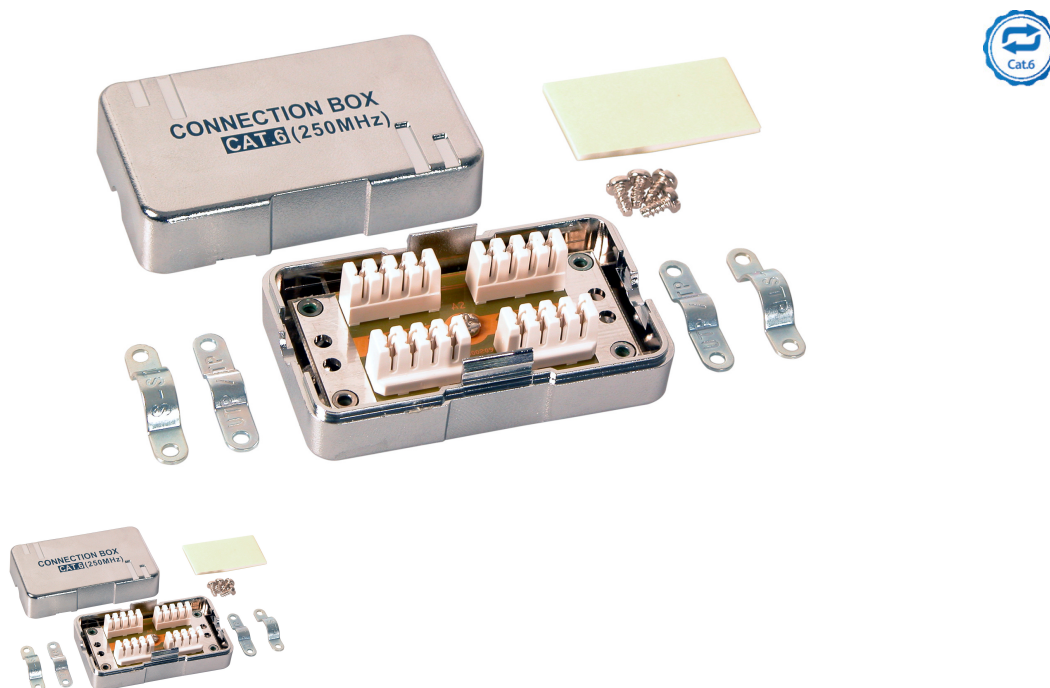

General data

Cat.6 connection module up to 250 MHz with IDC-terminals. The connecting module can be used to extend installation cables or reconnect damaged cables without having to install a complete cable segment.

With adhesive tapes for fixing

Screw-type strain relief

Cable entry up to 7.5 mm

Accessory

Screw-type strain relief (M3x12)

Cable inlet (4 x)

With adhesive tapes for fixing

Allgemeine Daten

Suitable for litz wire conductor	False
AWG-range	26 - 22
Max. cable diameter	10.0 mm
Suitable for degree of protection (IP)	IP20
Suitable for solid core	True
Suitable for flat cable	False
Suitable for round cable	True

This datasheet was created automatically on 02-10-2024 . Technical changes reserved.



DATASHEET

Connecting module Cat.6 250MHz with IDC - terminal

General data

Housing material	Plastic
Connection type	LSA
Special tool necessary	False
Category	6
Complaint to UL94	V-0

Mechanical characteristics

Dust cover	false
------------	-------

Mechanische Eigenschaften

Type of locking	Rastverriegelung
360° shield contact	True
Shield contact and strain relief separate	False

Electrical characteristics

Contact Resistance	20 mΩ
Dielectric Withstanding Voltage	1000 V AC 60Hz
Current Rating	1,5 A
Insulation Resistance	500 MΩ

Structure du câble

screened	True
----------	------

Available variants

ArtNr.	Bezeichnung	Colour
37596.2	Connecting module Cat.6 250MHz with IDC - terminal	silver


Drawings

This datasheet was created automatically on 02-10-2024 . Technical changes reserved.



DATASHEET

Connecting module Cat.6 250MHz with IDC - terminal

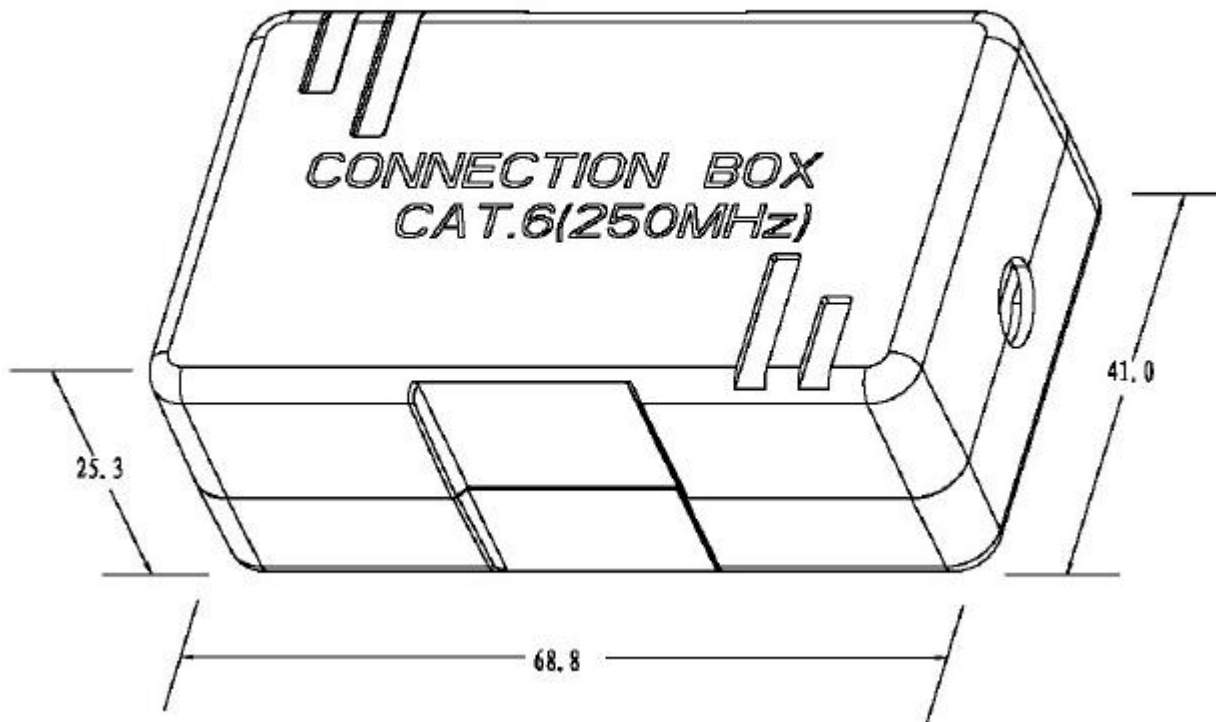

This datasheet was created automatically on 02-10-2024 . Technical changes reserved.

