

AP Outlet IP44

surface mounted
for 2 modules




AP outlet IP44 for 2 modules,
surface mounted

- 1 MS 1/8 Cat. 6/E_A shielded
MU 1/8 Cat. 6 unshielded
MS-C6A 1/8 Cat. 6_A shielded
- 2 MS-K 1/8 Cat. 6/E_A shielded
MS-K Plus 1/8 Cat. 6_A shielded
- 3 KS-T 1/8 Cat. 6/E_A shielded
KS-T 5 1/8 Cat. 5/5e shielded
KU-T 1/8 Cat. 6 unshielded
KU-T 1/8 Cat. 5/5e unshielded
KS-TS 1/8 Cat. 6/E_A tool-less
slimline shielded
KS-T Plus 1/8 Cat. 6_A tool-less
shielded
- 4 PS-GG45 7_A shielded

DESCRIPTION

Structured premises cabling in the industrial sector, for the transmission of Ethernet protocols.
Outlet IP67, surface mounted, for 2 modules (types see above).
For information on the properties of the module: see data sheet of the requested module.
Cable entry from the top (one or two cables).
Shatter-proof, stable housing, grey, similar to RAL 7035.
Protection rating IP44 when closed only (without patch cords).
Delivery without modules.

DESIGN

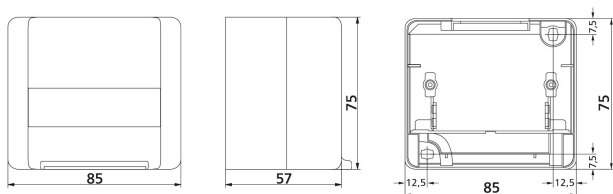

DIMENSIONS

W x H x D = 85 x 57 x 75 mm

VERSIONS

AP Outlet IP44
surface mounted
for 2 modules



Article Number	Product	Colour (similar to)	PU
185728	AP Outlet IP44 for 2x MS/MU 1/8 (delivery without modules)	light grey, RAL 7035	1 pc.
417510	AP Outlet IP44 for 2x modules with Keystone Clip (delivery without modules)	light grey, RAL 7035	1 pc.