
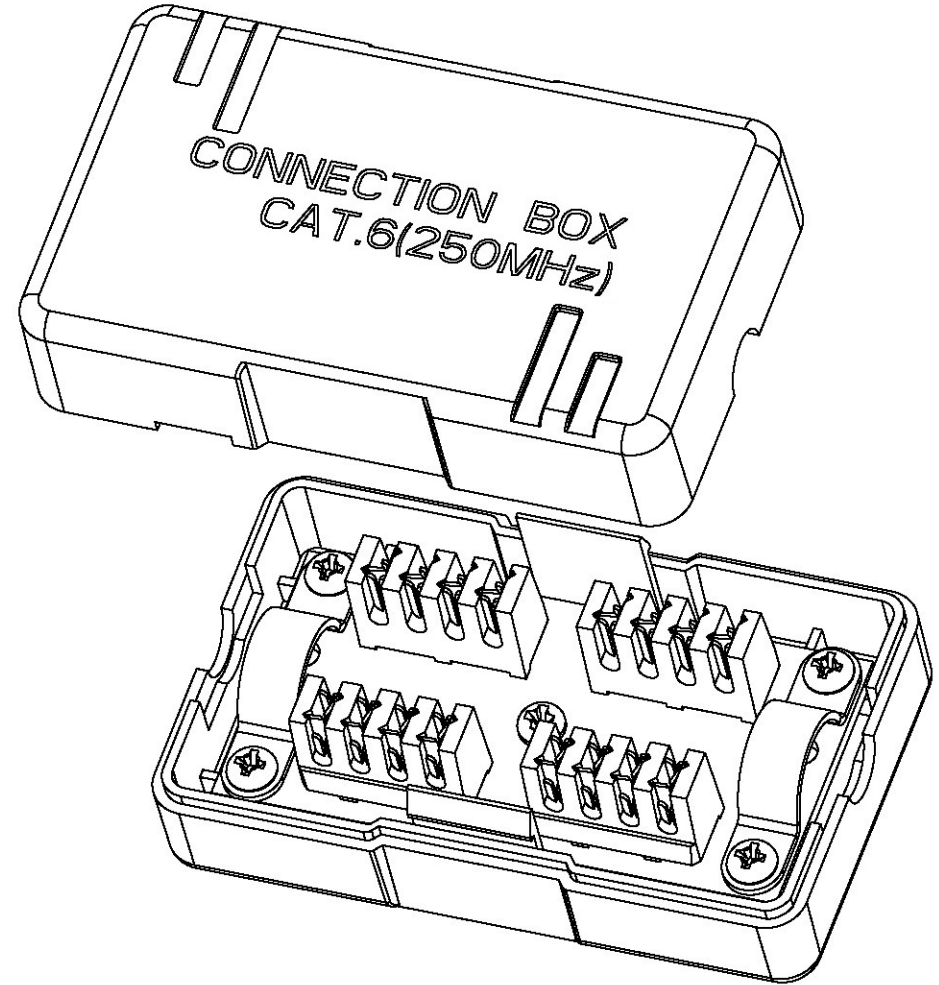


# CAT.6 CONNECTING MODULE

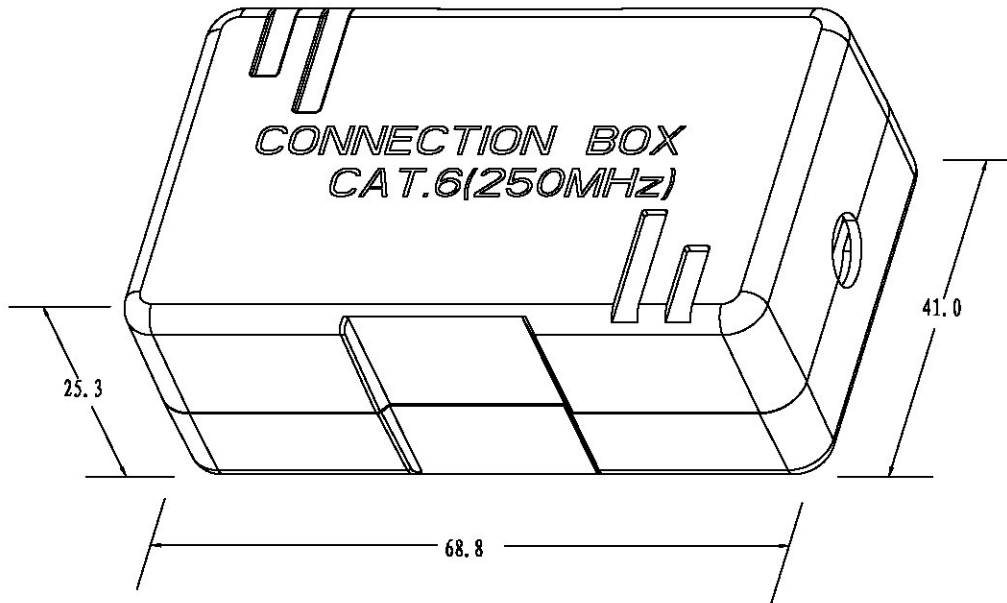

## Materials:

Box Cover: Fireproof PC/ABS UL-94V0 (Black) / metalized  
Box Base: Fireproof PC/ABS UL-94V0 (Black) / metalized  
PCB : FR-4/1.6mm UL-94V0  
IDC Pin : Bronze & Tinned  
IDC Terminal: For 22-26 AWG Cable

## Electrical Specifications:

Insulation Resistance: 500M ohms (min.)  
Contact Resistance: 20m ohms (max.)  
Current Rating : 1.5 Amps.  
Withstanding Voltage : 1000 VAC RMS @ 60Hz/ 1 min.

## Accessory:

1. Screw-type Strain Relief (M3X12)
2. Cable Inlet (4Pcs)
3. With Adhesive Tapes For Fixing

DRAW NO:		ITEM NO:	37596.2
	APPR		
UNIT:	mm	DESIGN	
SCALE:	TOLERANCE	.±1 .X±0.2 .XX±0.15	DATE:

ROHS compliant



**EFB-ELEKTRONIK GmbH**