


MaxiLog®

Smooth, lightweight and strong

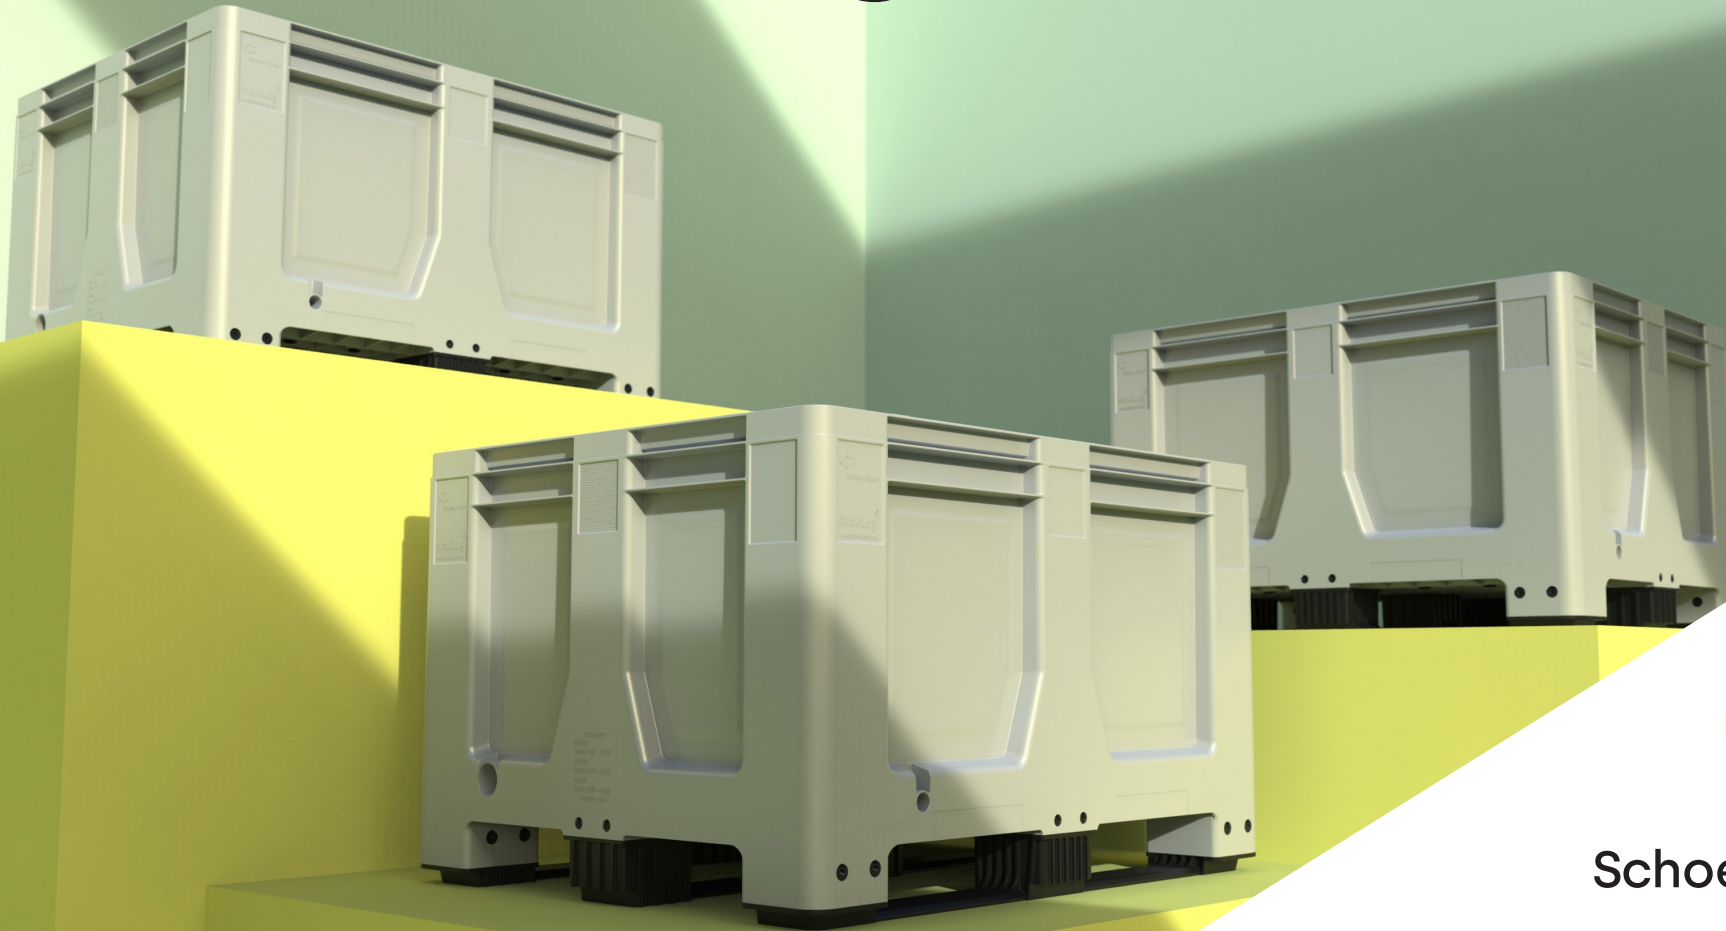

Schoeller Allibert

Versatile wide range



MaxiLog[®] is a robust, automation-ready all-rounder for food and bulk transport. Safe, easy to clean, and stackable 10 high without retaining water or ice—indoors or out. »

Smooth and safe

Clean with ease, empty without effort, and safe for deep freezing. MaxiLog® brings simplicity to your toughest supply chain challenges.

Solid smooth internal base

This is the only version where we can add (retrofit) screws into the base at four points, allowing us to connect the runners to the base for tilting operations.

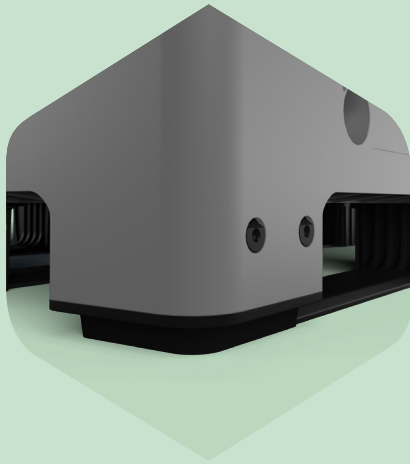

Strong

Handles heavy loads with confidence. Optimized corner pillars ensure balanced load transfer with 4500 kg stacking capacity. Your products stay secure, even when stacked high.

Fast drying

Save time and money with specially designed slanted surfaces that speed water drainage. Reduce cleaning process time and increase operational efficiency.


Versatile wide range

Choose from 4 feet, 2 skids or 3 skids variants in solid or ventilated versions. Perfect for food processing, pharmaceuticals and agriculture – one container for all your industry needs.

Outlet valve prepared

Add 1' or 2' drain valves wherever you need them. Prepared mounting zones on the base and sidewalls give you the flexibility to customize your container.



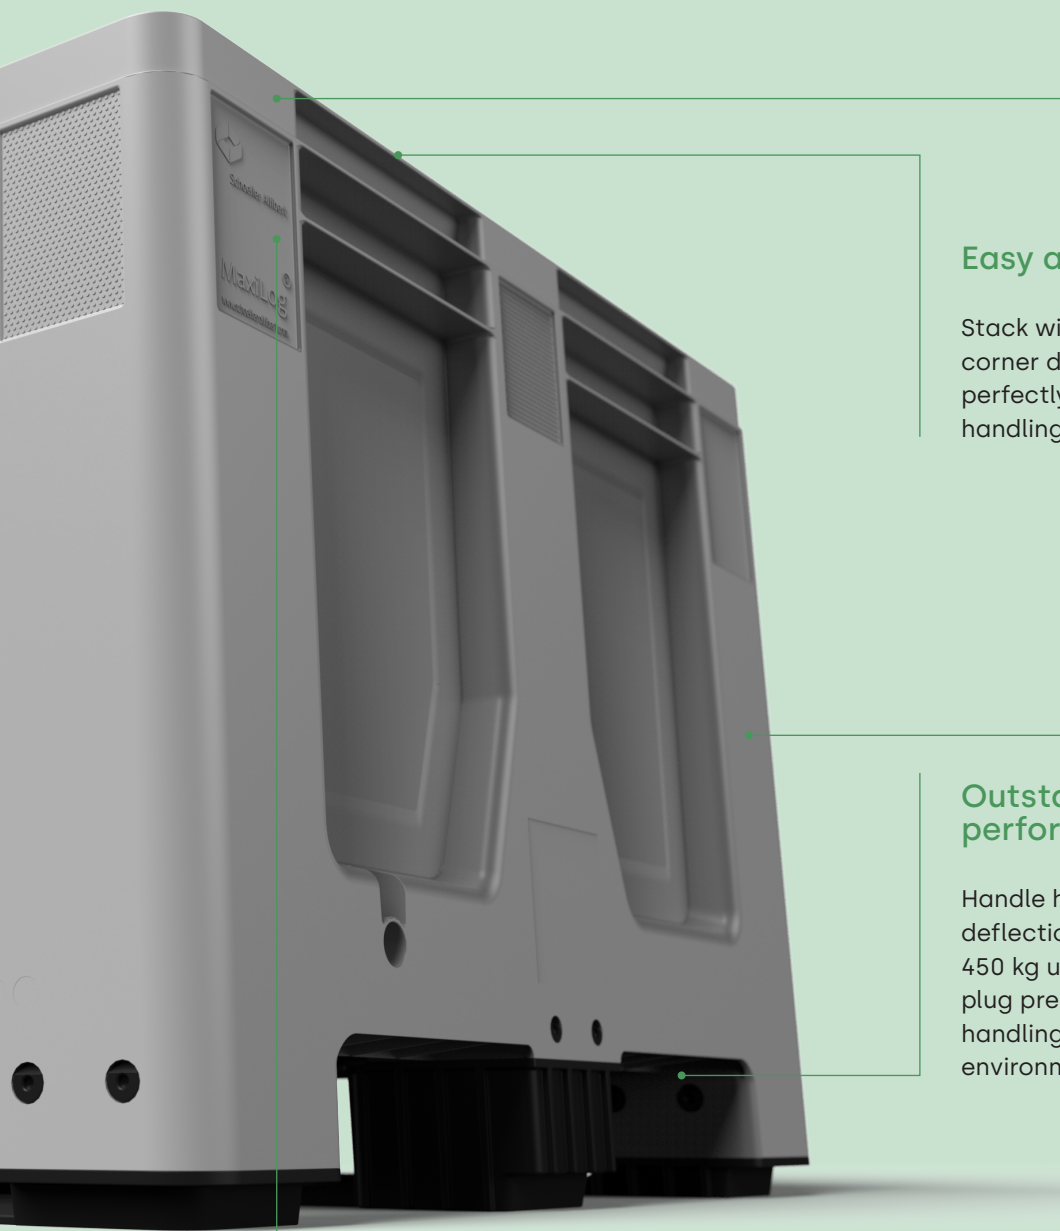

Large internal volume

Maximize efficiency with 610 L capacity that optimizes truck payload and vehicle fill. Transport more with less.

Smooth & Sloped Surface Prevents Water or Ice Retention

The smooth, sloped design prevents water pooling and ice build-up, ensuring safer stacking, quicker drying, and improved hygiene in all conditions.

Lightweight

At just 36.6 kg for the solid 3 skids version, MaxiLog® lets you transport more fresh and frozen products in each truck. Cut transport costs and reduce emissions while increasing payload.

Easy and fast handling

Stack with confidence. The internal top corner design ensures containers center perfectly when stacked, improving handling speed and safety.


Outstanding performances

Handle heavy loads with minimal deflection. The base supports 450 kg unit loads, while friction plug preparation ensures secure handling even in demanding environments.

Customization & tracking

Take control of your assets. Pin dot areas and recessed zones for self-adhesive labels on each sidewall make fleet management simple. RFID-ready zones and logo inserts enhance visibility while securing your investment.

Ventilated version for optimised
air flow in cooling chambers

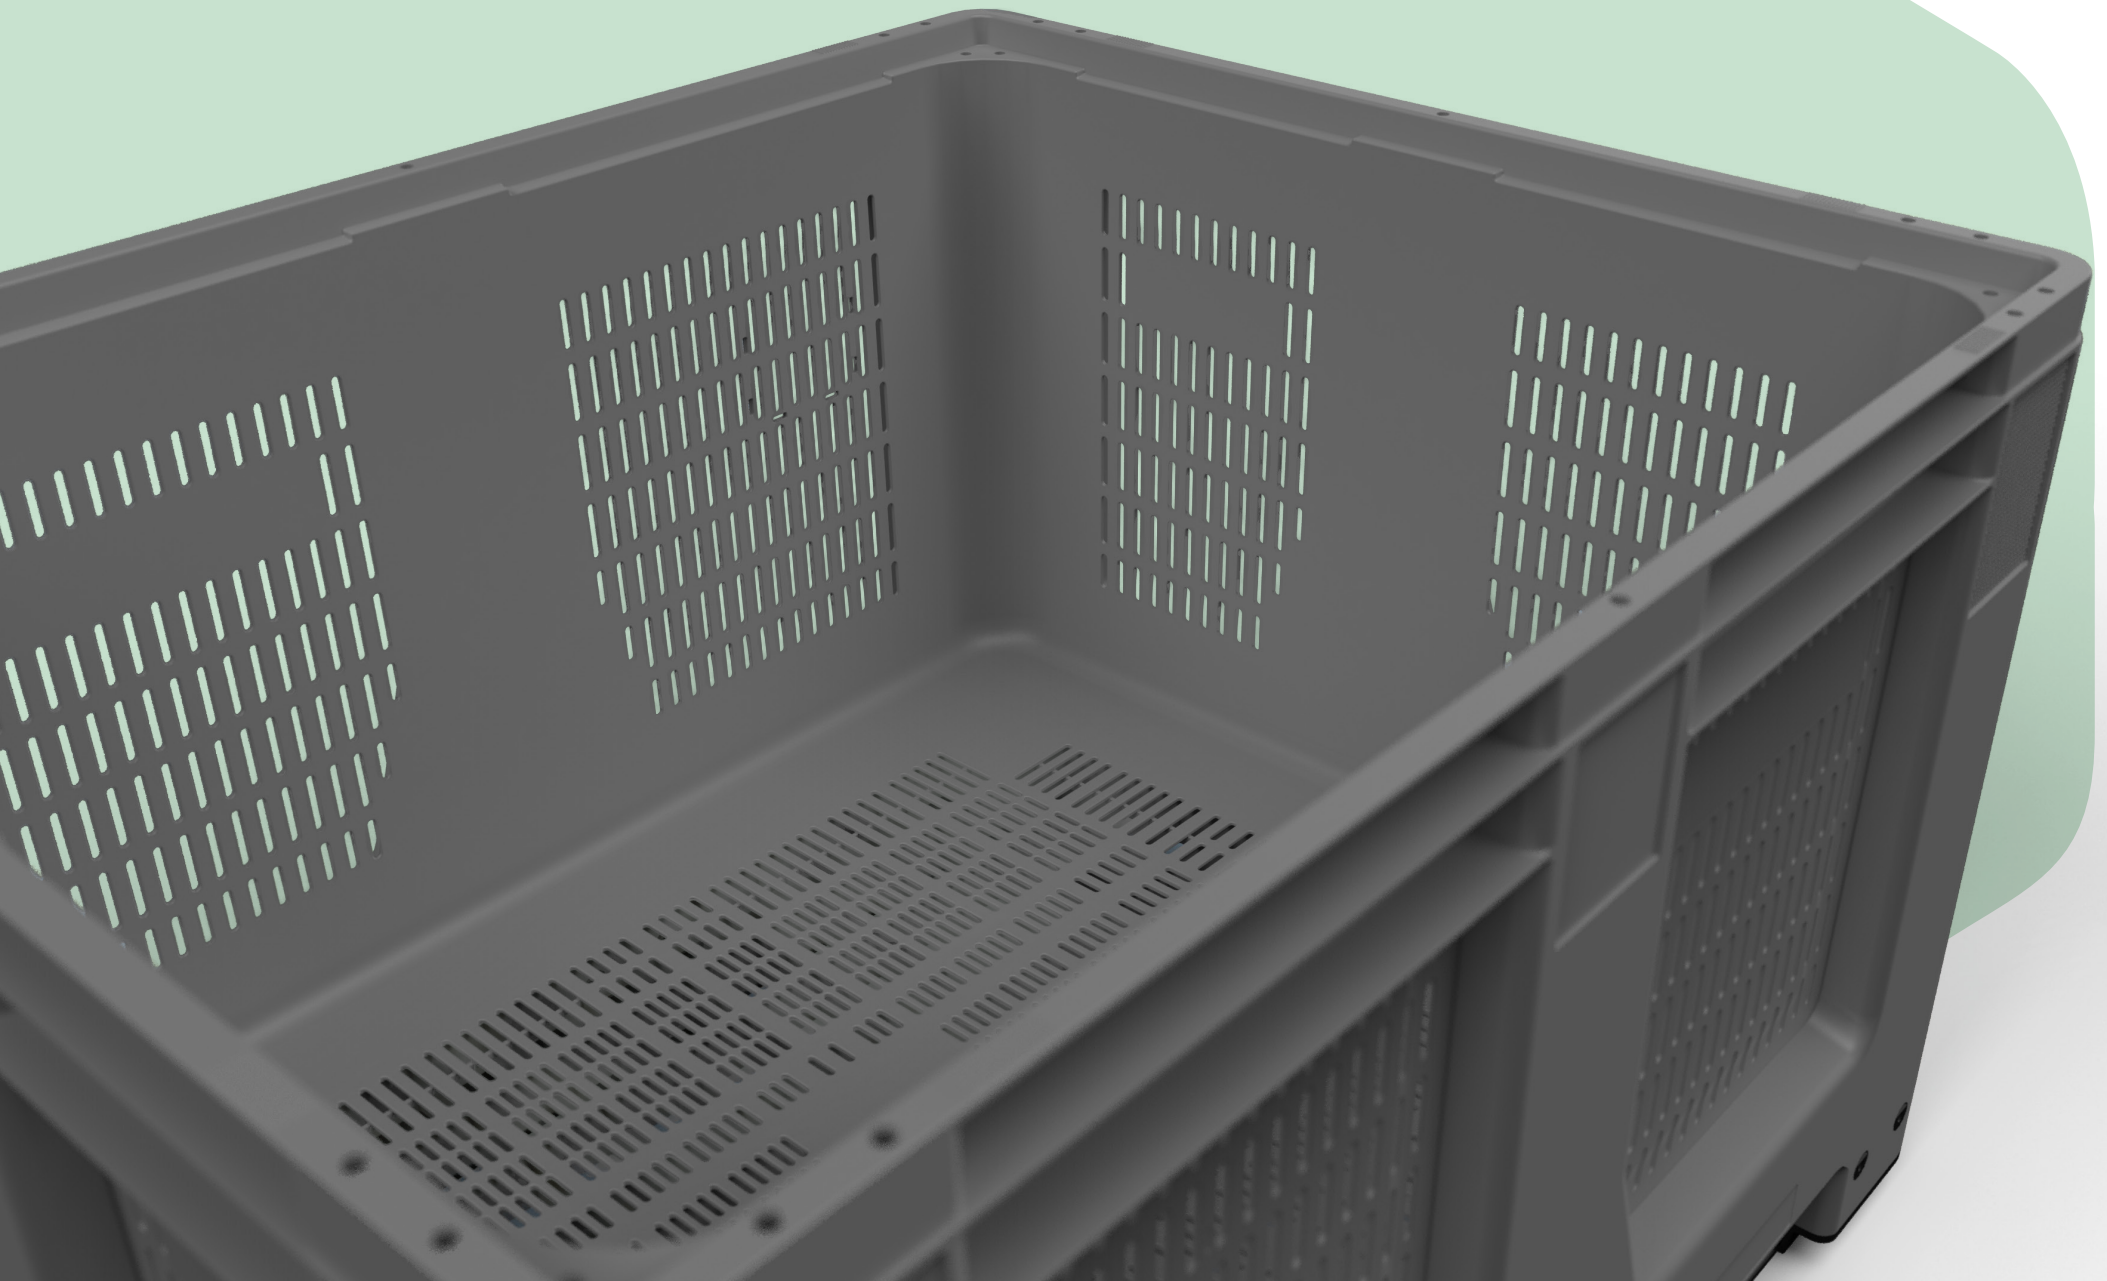

Technical data



4429.100 - 610 L

Ext. (mm)	1200 x 1000 x 760
Int. (mm)	1108 x 908 x 600
Weight (Kg)	32.2
Stacked height	734

Solid side and base 4 feet



4429.200 - 610 L

Ext. (mm)	1200 x 1000 x 760
Int. (mm)	1108 x 908 x 600
Weight (Kg)	34.3
Stacked height	734

Solid walls and base 2 skids



4429.300 - 610 L

Ext. (mm)	1200 x 1000 x 760
Int. (mm)	1108 x 908 x 600
Weight (Kg)	36.6
Stacked height	734

Solid walls and base 3 skids



4429.400 - 610 L

Ext. (mm)	1200 x 1000 x 760
Int. (mm)	1108 x 908 x 600
Weight (Kg)	31.4
Stacked height	734

Ventilated walls and base 4 feet



4429.500 - 610 L

Ext. (mm)	1200 x 1000 x 760
Int. (mm)	1108 x 908 x 600
Weight (Kg)	33.4
Stacked height	734

Ventilated walls and base 2 skids




4429.600 - 610 L

Ext. (mm)	1200 x 1000 x 760
Int. (mm)	1108 x 908 x 600
Weight (Kg)	35.7
Stacked height	734

Ventilated walls and base 3 skids

Lid



4410.820

Ext. (mm)	1212 x 1012 x 79
Weight (Kg)	7.6

















Solutions

- Anti-bacterial options, CircuLine®
- And SmartLink ready
- Now also available: UN-approved versions in 11H2 and 50H models for transporting dangerous goods by road, sea, and air, plus UN & fill level monitoring for powders in the automotive industry.

Customise your way

- **Branded logos & markings** - Add your company logo or messaging.
- **Unique material compositions** - Including ESD-safe, metal-detectable, and anti-microbial options.
- **Modified dimensions** - Tailored to fit your specific application needs.
- **Custom accessories** - Enhance functionality with bespoke add-ons.

All of Schoeller Allibert's products are available in a standard range of colours, other colours are possible upon request. RAL, PMS and Pantone colours are references for the closest comparator.

 White RAL 9016 Pantone 705	 Black RAL 9005 Pantone Black	 Grey 502 RAL 7040 Pantone 423	 Grey 522 RAL 7012 Pantone 445	 Green 415 RAL 6011 Pantone 626	 Green 481 RAL 6005 Pantone 3308	 Blue 646 Pantone 2728C	 Blue 626 RAL 5012 Pantone 307
 Blue 661 RAL 5003 Pantone 540	 Blue 662 RAL 5005 Pantone 294	 Red 246 RAL 3020 Pantone 485	 Orange 311 RAL 2004 Pantone 1655	 Yellow Pastel 316 RAL 1034 Pantone 715	 Yellow 355 RAL 1018 Pantone 123	 Beige 319 RAL 1015 Pantone 726	 Brown 801 RAL 3009 Pantone 181



Schoeller Allibert

Efficient by design, circular by nature

Let's connect! Contact us

www.schoellerallibert.com



© Schoeller Allibert – all rights reserved. This presentation and the information contained (including any designs, drawings, trademarks, innovations, etc.) herein is confidential and proprietary information owned by Schoeller Allibert and is protected by copyright, trademark, patent, trade secret and other laws. No right, title or interest therein is transferred to you. The presentation nor the contents thereof may be used, disclosed, reproduced, copied, published, forwarded or distributed to any other party without the express written consent of Schoeller Allibert.