


Space-saving crates designed for efficiency

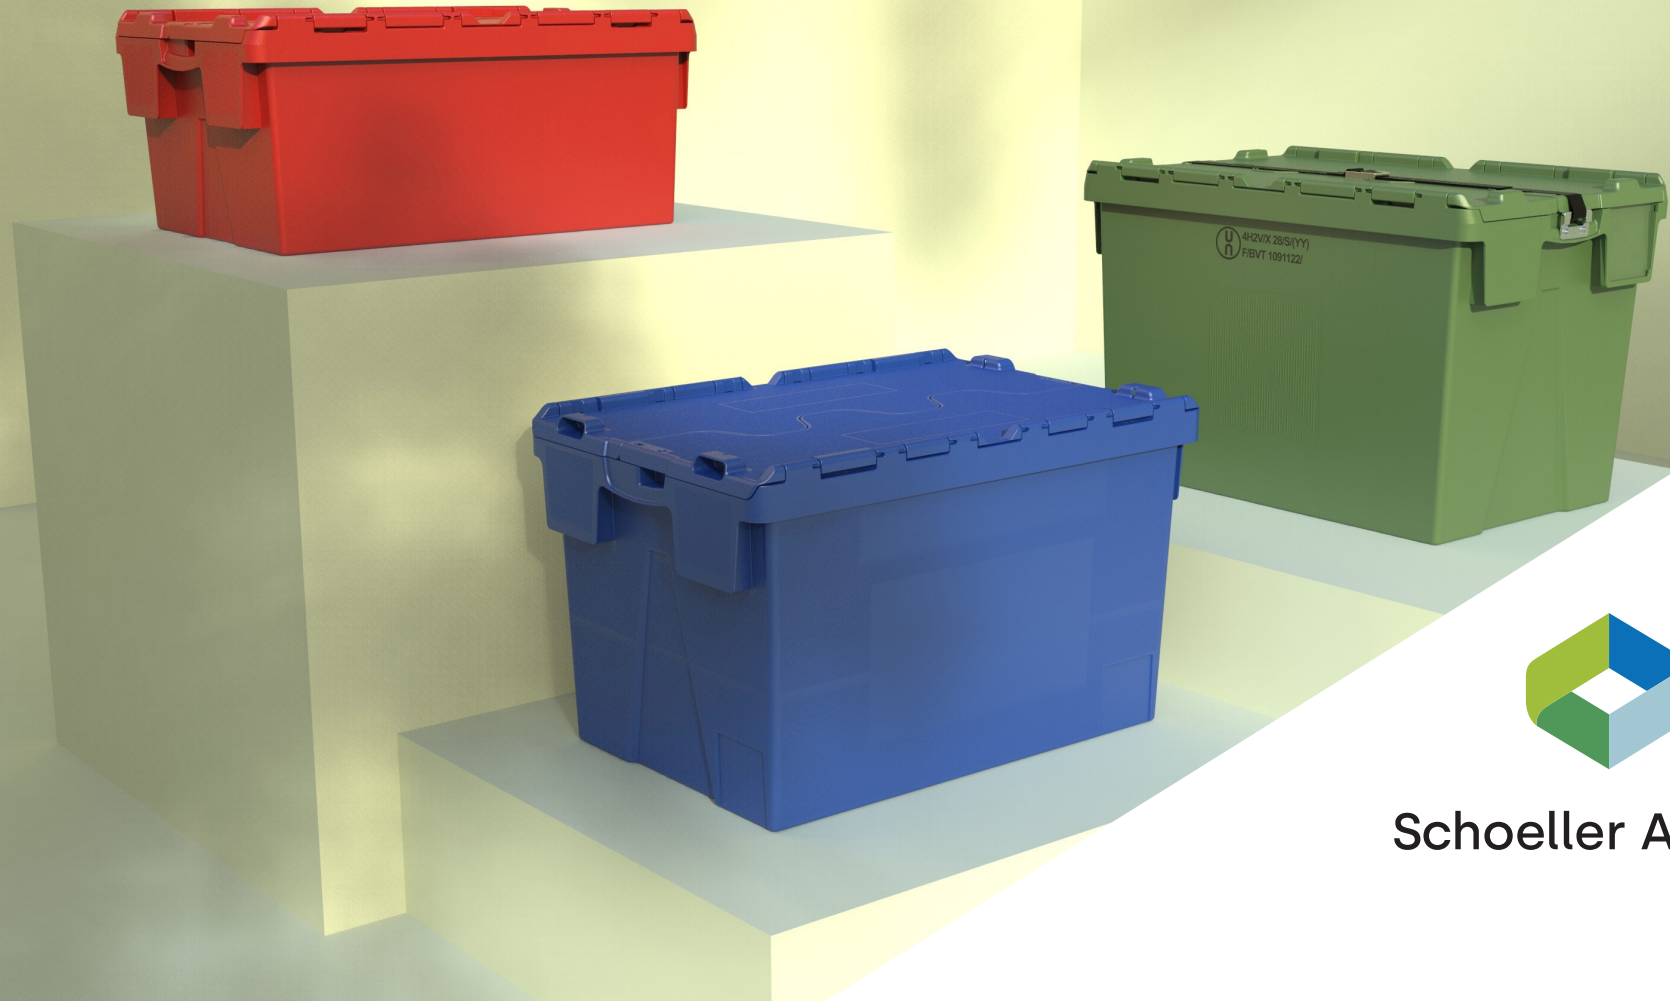


Schoeller Allibert

Attached Lid Containers 18L to 70L Range

Reliable, secure, and space-optimized—
Kaiman[®] is the go-to choose for
modern, sustainable logistics. »

Performance

- Cut fuel costs and shrink your carbon footprint.
- Individual loads range from 18kg to 30kg and static load (how many can be stacked on the bottom crate) from 120kg to 270kg depending on the model.
- Save up to 73% space when empty (nesting percentage ranges from 51% to 73% depending on the model)

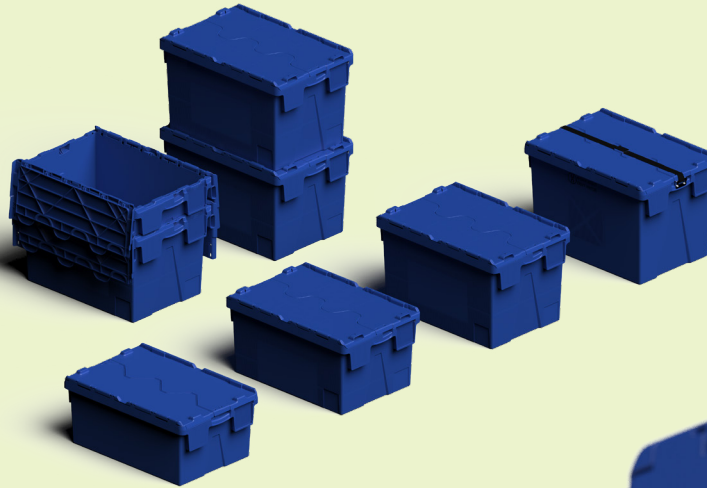

Identification¹


- Remove labels cleanly with no sticky residue thanks to ribbed finish on sides and lid.
- Protect identity cards and labels with built-in ticket window.
- Label anywhere with 80x70mm recesses on all 4 sides.
- Track your assets with RFID capability.

Branding¹

- Showcase your brand with 295x150mm print areas on both long sides.
- Keep identification visible even when nested with the 170x30mm printing area inside lid.


¹ Available on select models



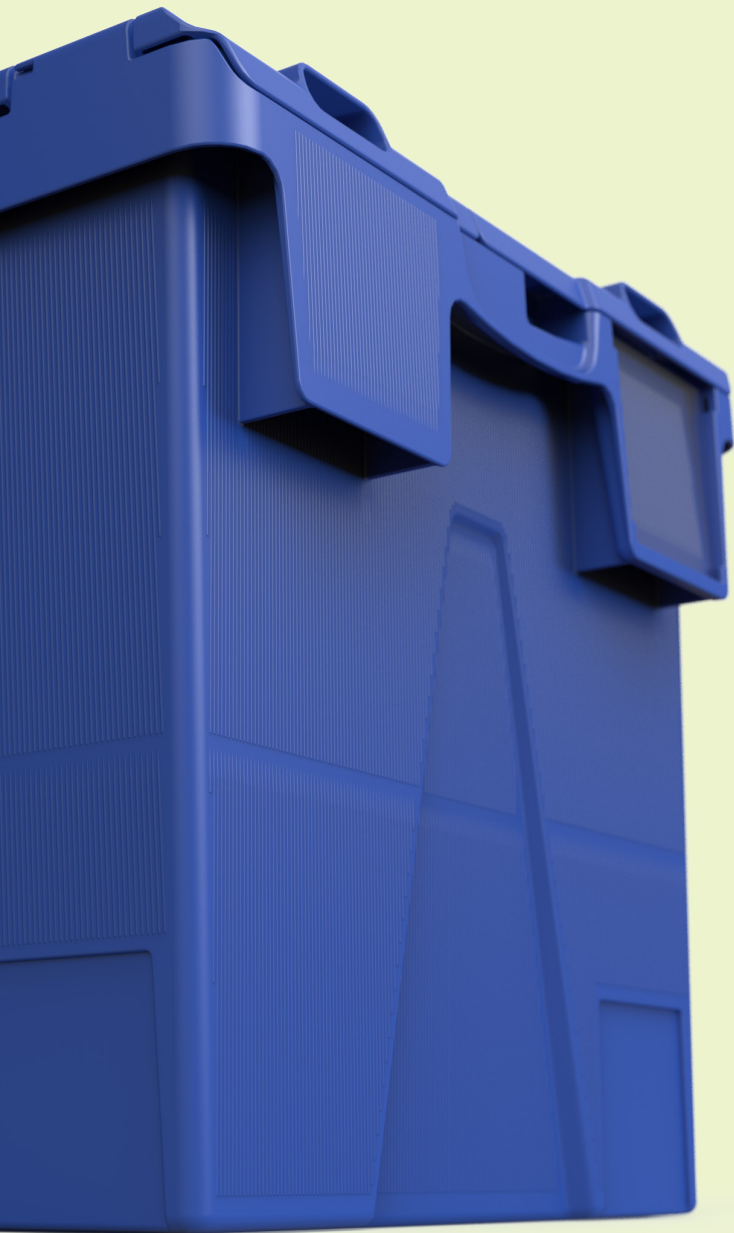


Automated handling


- ◆ Open lids automatically with precision positioning.
- ◆ Maintain workflow efficiency with lids that hang vertically when open.
- ◆ Transition smoothly on conveyors with bevelled leading edge.
- ◆ Improved stability on conveyors due to the ribbed base option on some models.

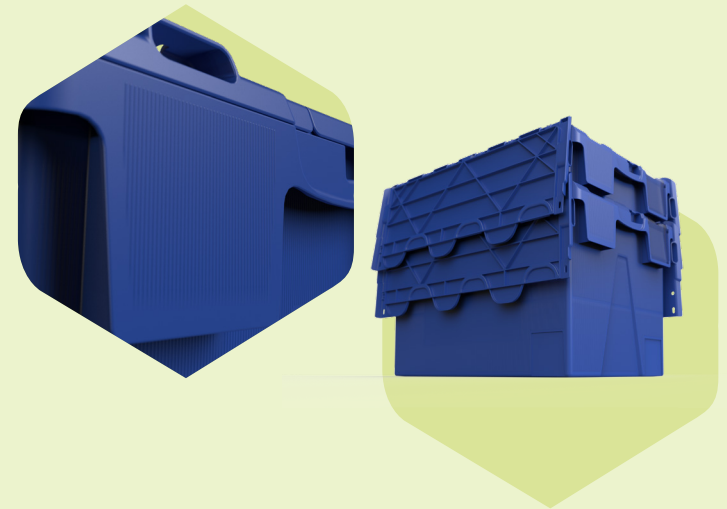

Security

- ◆ Prevent tampering with innovative "teeth" that interlock lid and base, making containers impossible to prise open when fitted with tamper-evident seals.

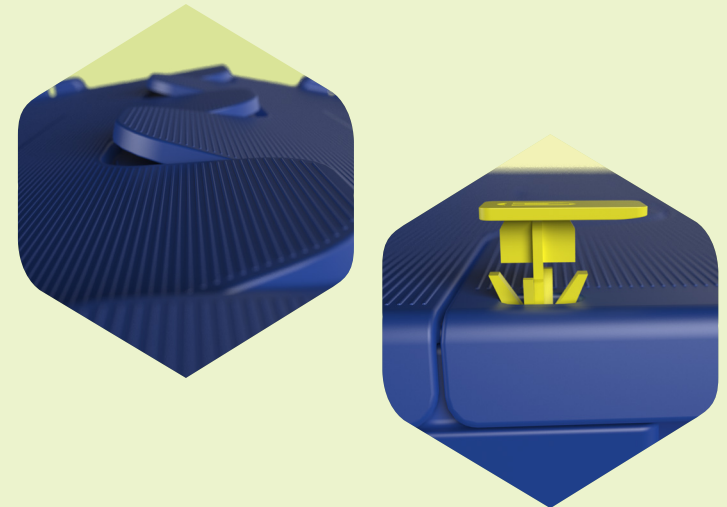

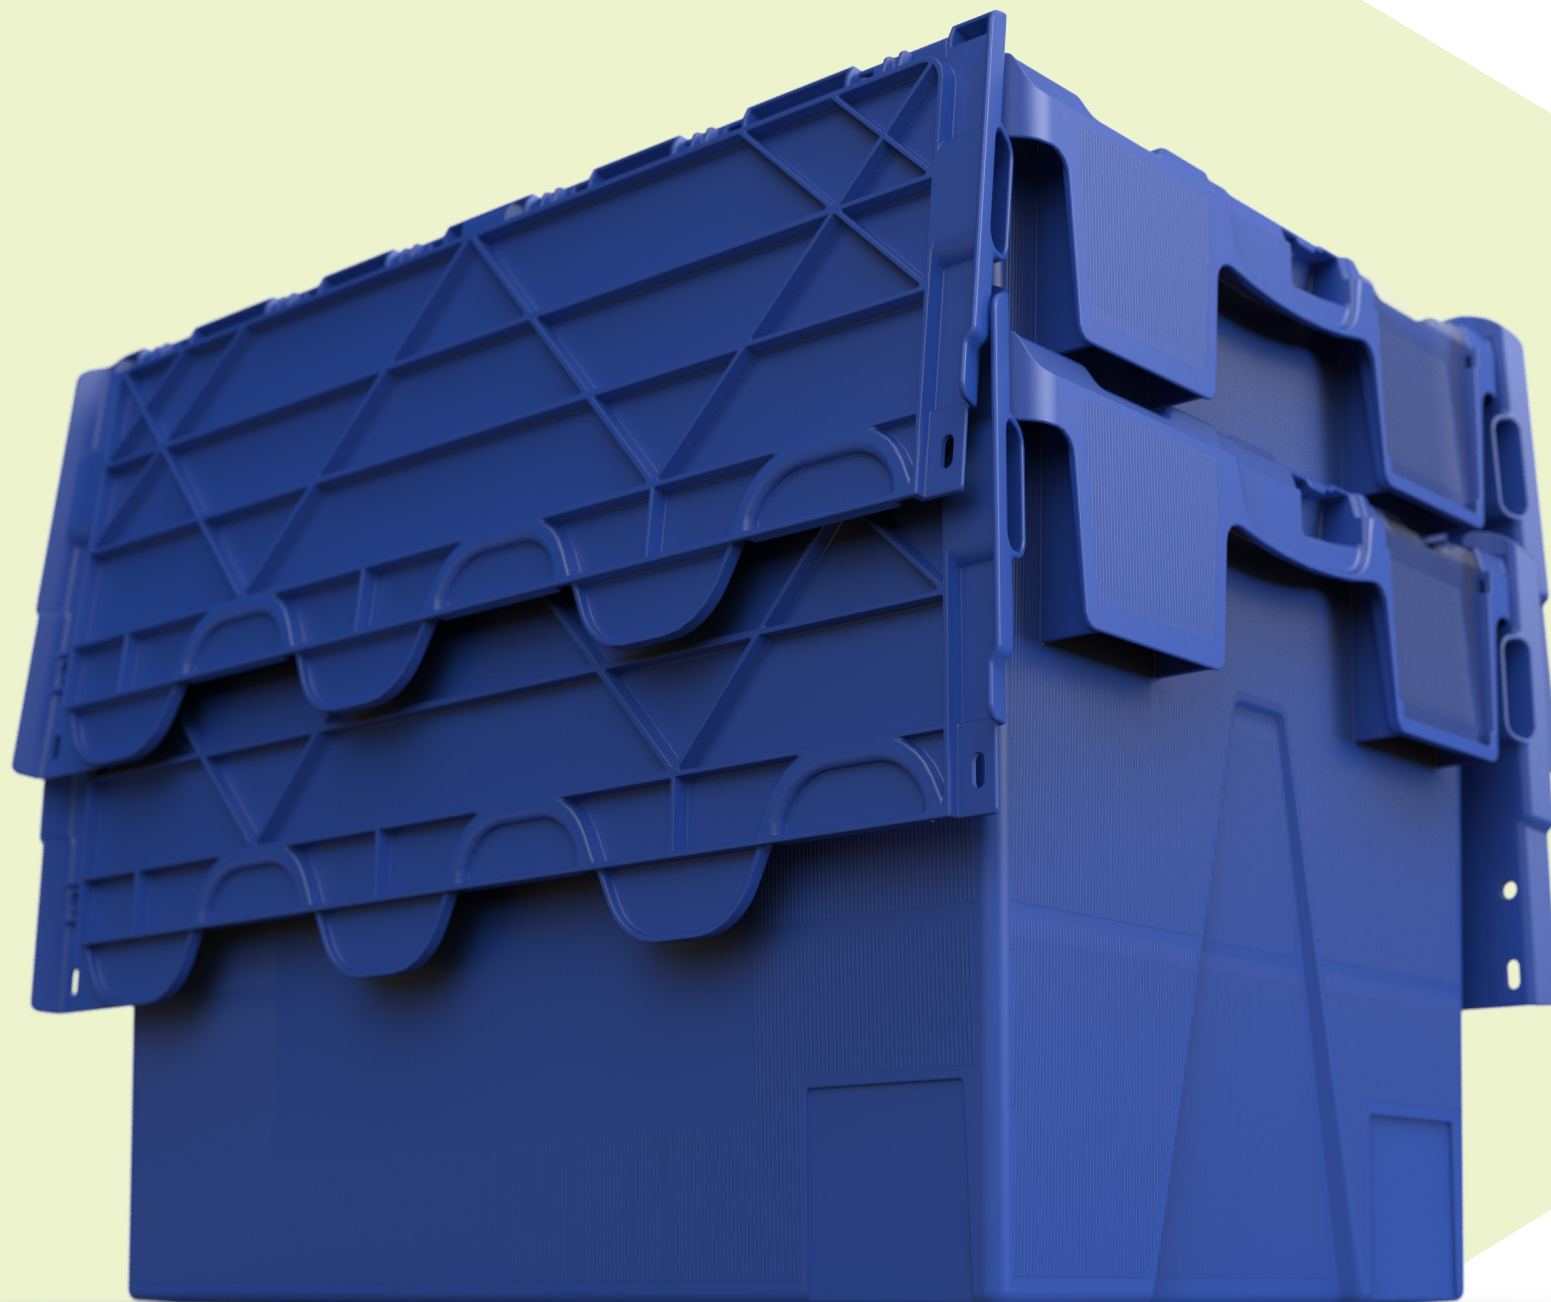

Technical data



9937004 18 L

Ext. (mm)	400 x 300 x 222
Int. (mm)	338 x 254 x 197
Weight (Kg)	1.6
Load capacity (Kg)	18
Static load (Kg)	126
Nesting ratio	51%



9107004 22 L

Ext. (mm)	400 x 300 x 264
Int. (mm)	334 x 253 x 239
Weight (Kg)	1.7
Load capacity (Kg)	18
Static load (Kg)	120
Nesting ratio	59%




9108004 25 L

Ext. (mm)	400 x 300 x 306
Int. (mm)	329 x 250 x 281
Weight (Kg)	1.9
Load capacity (Kg)	18
Static load (Kg)	126
Nesting ratio	65%



9109004 48 L

Ext. (mm)	600 x 400 x 264
Int. (mm)	520 x 353 x 240
Weight (Kg)	3.0
Load capacity (Kg)	25
Static load (Kg)	142
Nesting ratio	59%



8583004 50 L


Ext. (mm)	600 x 400 x 308
Int. (mm)	514 x 346 x 282
Weight (Kg)	2.9
Load capacity (Kg)	25
Static load (Kg)	142
Nesting ratio	65%



8583002U 50 L (Special UN version)

Ext. (mm)	600 x 400 x 308
Int. (mm)	514 x 346 x 282
Weight (Kg)	2.9
Load capacity (Kg)	25
Static load (Kg)	142
Nesting ratio	65%

UN Certified: 4H2/X30/S/*/B/2095-190269



9958027 50 L

Ext. (mm)	600 x 400 x 308
Int. (mm)	529 x 351 x 272
Weight (Kg)	3.4
Load capacity (Kg)	20
Static load (Kg)	270
Nesting ratio	65%

All of Schoeller Allibert's products are available in a standard range of colours, other colours are possible upon request. RAL, PMS and Pantone colours are references for the closest comparator.



White
RAL 9016
Pantone 705



Black
RAL 9005
Pantone Black




Grey 502
RAL 7040
Pantone 423



Grey 522
RAL 7012
Pantone 445



Green 415
RAL 6011
Pantone 626



Green 481
RAL 6005
Pantone 3308



Blue 646
Pantone 2728C




Blue 626
RAL 5012
Pantone 307



Blue 661
RAL 5003
Pantone 540



Blue 662
RAL 5005
Pantone 294



Red 246
RAL 3020
Pantone 485



Orange 311
RAL 2004
Pantone 1655




Yellow Pastel 316
RAL 1034
Pantone 715



Yellow 355
RAL 1018
Pantone 123



Beige 319
RAL 1015
Pantone 726



Brown 801
RAL 3009
Pantone 181

Technical data



8584004 64 L

Ext. (mm)	600 x 400 x 367
Int. (mm)	507 x 342 x 340
Weight (Kg)	3.3
Load capacity (Kg)	25
Static load (Kg)	142
Nesting ratio	71%



9112004 65 L

Ext. (mm)	600 x 400 x 365
Int. (mm)	508 x 346 x 340
Weight (Kg)	3.7
Load capacity (Kg)	25
Static load (Kg)	142
Nesting ratio	70%



9114004 70 L

Ext. (mm)	600 x 400 x 400
Int. (mm)	504 x 343 x 375
Weight (Kg)	3.7
Load capacity (Kg)	25
Static load (Kg)	142
Nesting ratio	73%



91140L4 70 L (Special UN version)

Ext. (mm)	600 x 400 x 400
Int. (mm)	514 x 343 x 375
Weight (Kg)	3.8
Load capacity (Kg)	30
Static load (Kg)	195
Nesting ratio	73%

UN Certified: 4H2V/X 28/S/--*/F/BVT 1091122/



91140U4 70 L (Special UN version)

Ext. (mm)	600 x 400 x 400
Int. (mm)	504 x 343 x 375
Weight (Kg)	3.8
Load capacity (Kg)	30
Static load (Kg)	195
Nesting ratio	65%

UN Certified: 4H2/Y30/S/* /B/2095-190269

Accessories

A199.580.008 Security seal

Tamper-evident security seal for Kaiman®



9192.004 Universal dolly

Ext. (mm)	798 x 587 x 185
Max. load (Kg)	500

800 x 600mm dolly with 2 fixed, 2 swivel castors, 10 load retaining pop-ups and flip-out extension for carrying nested 600x400mm Kaiman.

All of Schoeller Allibert's products are available in a standard range of colours, other colours are possible upon request. RAL, PMS and Pantone colours are references for the closest comparator.

 **White**
RAL 9016
Pantone 705

 **Black**
RAL 9005
Pantone Black

 **Grey 502**
RAL 7040
Pantone 423

 **Grey 522**
RAL 7012
Pantone 445

 **Green 415**
RAL 6011
Pantone 626

 **Green 481**
RAL 6005
Pantone 3308

 **Blue 646**
Pantone 2728C

 **Blue 626**
RAL 5012
Pantone 307

 **Blue 661**
RAL 5003
Pantone 540

 **Blue 662**
RAL 5005
Pantone 294

 **Red 246**
RAL 3020
Pantone 485

 **Orange 311**
RAL 2004
Pantone 1655

 **Yellow Pastel 316**
RAL 1034
Pantone 715

 **Yellow 355**
RAL 1018
Pantone 123

 **Beige 319**
RAL 1015
Pantone 726

 **Brown 801**
RAL 3009
Pantone 181



Schoeller Allibert

Efficient by design, circular by nature

Let's connect! Contact us

www.schoellerallibert.com



© Schoeller Allibert – all rights reserved. This presentation and the information contained (including any designs, drawings, trademarks, innovations, etc.) herein is confidential and proprietary information owned by Schoeller Allibert and is protected by copyright, trademark, patent, trade secret and other laws. No right, title or interest therein is transferred to you. The presentation nor the contents thereof may be used, disclosed, reproduced, copied, published, forwarded or distributed to any other party without the express written consent of Schoeller Allibert.