How Schoeller Allibert rental services work

CHOOSE YOUR ASSET

CHOOSE & SIGN CONTRACT

USE OF ASSETS

END OF CONTRACT

INSPECT & RETURN
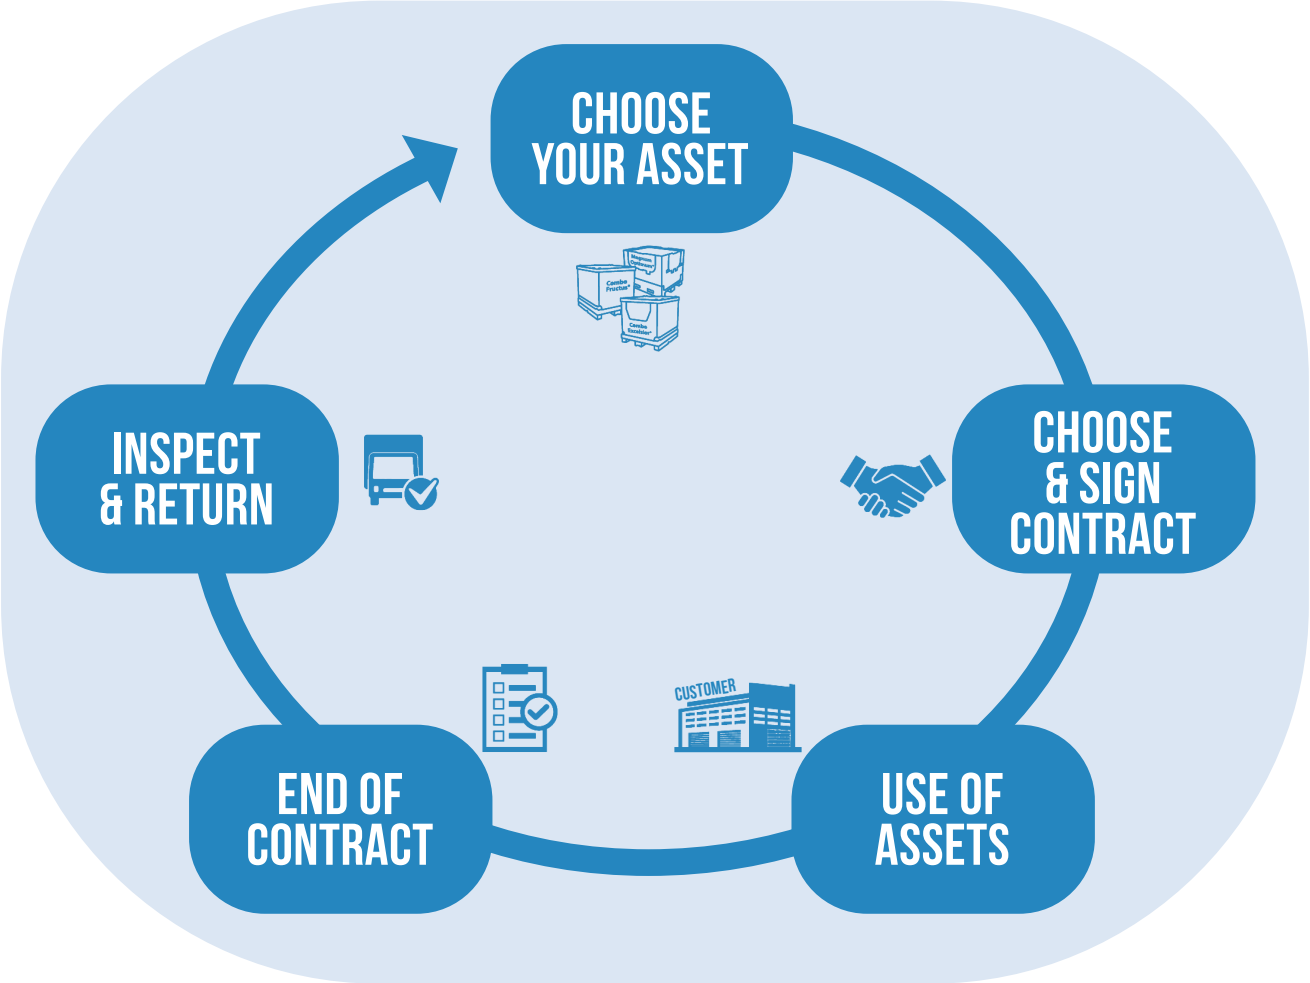
Get in touch with your local sales representative for more details.

Visit us at: schoellerallibert.com

Schoeller Allibert
Services

Schoeller Allibert

SCHOELLER ALLIBERT SERVICES CATALOGUE

Schoeller Allibert
Innovating your logistics for a better world

Schoeller Allibert Services Rental Catalogue

Schoeller Allibert, Europe's leading manufacturer of plastic returnable transport packaging (RTP), now offers a range of products that are available to rent. Renting our products allows you to invest in - and benefit from - our high-quality RTP solutions at a fixed rate without the need for cap-ex investment. Our rental services enable you to flexibly upscale your fleet as necessary. Simply hire what you need, when you need it. The possibilities are truly endless: our SmartLink enabled assets provide you with detailed information on geolocation, temperature, availability status, fill level and much more besides.

We are pleased to offer you three different packages:

1) Long term rental + SmartLink
- Schoeller Allibert owns the assets
- Customer rents asset and connected tag
- Customer makes choice about the duration and type of contract
- Customer pays fixed monthly fee

2) SmartLink retrofit existing asset pool
- Customer has signed up for a bulk rental deal
- Customer has already bought Schoeller Allibert assets
- Schoeller Allibert can retrofit device on Schoeller Allibert bulk assets - cost subject evaluation
- Customer pays a one-off retrofit cost, tag and monthly SmartLink fee for connectivity

3) SmartLink on new products + retake non Schoeller Allibert assets
- Schoeller Allibert retakes non Schoeller Allibert assets and recycles the plastic into a new Schoeller Allibert asset
- Customer owns the Schoeller Allibert asset
- Connected tag is fitted on new assets
- Customer buys asset and tag, monthly SmartLink fee is payed for connectivity

Our rental range

Intermediate Bulk Containers (IBC)

Schoeller Allibert's IBC's are suitable for food, pharmaceutical, non-hazardous chemical and non-chemical products handling and transport. Our Foldable IBC provides 100% hygiene, safety maximum cost savings on return trips.

5602.303 - Combo Excelsior Hybrid®
Ext. (mm)	1219 x 1016 x 1147
Int. (mm)	1134 x 934 x 943
Volume (L)	1000
Load cap. (Kg)	1500
Folding ratio (%)	67

5600.203 - Combo Fructus® 300
Ext. (mm)	1219 x 1118 x 1125
Int. (mm)	1147 x 1045 x 943
Volume (L)	1135
Load cap. (Kg)	1500
Folding ratio (%)	71

Version with 3 runners, ideal for seafreight

4430.B20 - Combo Life 65
Ext. (mm)	805 x 609 x 833
Volume (L)	250
Load cap. (Kg)	350
Folding ratio (%)	54

Version with 3 runners and bottom discharge

5600.103 - Combo Fructus® 280
Ext. (mm)	1219 x 1118 x 1064
Int. (mm)	1147 x 1045 x 882
Volume (L)	1060
Load cap. (Kg)	1500
Folding ratio (%)	70

Version with 3 runners, ideal for refrigerated sea freight

5600.303 - Combo Fructus® 315
Ext. (mm)	1219 x 1118 x 1186
Int. (mm)	1147 x 1045 x 1004
Volume (L)	1192
Load cap. (Kg)	1500
Folding ratio (%)	73

Version with 3 runners, ideal for road and rail transportation

4420.038 - Combo Life 285
Ext. (mm)	1155 x 1155x 1132
Int. (mm)	1051 x 1031 x 924
Volume (L)	1030
Load cap. (Kg)	1400
Folding Ratio (%)	60

Version with 3 runners, bottom discharge and drop door

Foldable Large Containers (FLC)

Schoeller Allibert's FLC's are the most efficient reverse logistics solution: with the lowest folded height on the market, Magnum Optimum® can be folded up to 9 units high in a standard truck and up to 11 units in a mega truck.

2500.A61 - Magnum Optimum®
Ext. (mm)	1200 x 800 x 960
Int. (mm)	1142 x 742 x 785
Volume (L)	665
Load cap. (Kg)	750
Folding ratio (%)	69

SmartLink enabled version with 2 runners, 2 feet and 2 drop doors

2510.A51 - Magnum Optimum®
Ext. (mm)	1200 x 1000 x 595
Int. (mm)	1140 x 940 x 410
Volume (L)	439
Load cap. (Kg)	750
Folding ratio (%)	34

SmartLink enabled version with 2 runners and 2 feet

2549.B61 - Magnum Optimum®
Ext. (mm)	1200 x 1000 x 975
Int. (mm)	1140 x 940 x 790
Volume (L)	847
Load cap. (Kg)	750
Folding ratio (%)	69

SmartLink Availabilty status version with 2 runners, 2 feet and 2 drop doors

2510.A80 - Magnum Optimum® Hopper
Ext. (mm)	1200 x 1000 x 805
Int. (mm)	1140 x 940 x 595
Volume (L)	535
Load cap. (Kg)	500
Folding ratio (%)	33

SmartLink enabled version with 2 runners, 2 feet and hopper base

2550.A80 - Magnum Optimum® Hopper
Ext. (mm)	1200 x 1000 x 1210
Int. (mm)	1140 x 940 x 1000
Volume (L)	968
Load cap. (Kg)	500
Folding ratio (%)	56

SmartLink enabled version with 2 runners, 2 feet and hopper base

2549.A94 - Magnum Optimum® Optishute
Ext. (mm)	1200 x 1000 x 975
Int. (mm)	1140 x 940 x 790
Volume (L)	847
Load cap. (Kg)	250
Folding ratio (%)	65

SmartLink enabled version with 2 runners, 2 feet, 1 drop door and translucent shute door. Lid included

2500.B61 - Magnum Optimum®
Ext. (mm)	1200 x 800 x 960
Int. (mm)	1142 x 742 x 785
Volume (L)	665
Load cap. (Kg)	750
Folding ratio (%)	69

SmartLink Availabilty status version with 2 runners, 2 feet and 2 drop doors

2549.A61 - Magnum Optimum®
Ext. (mm)	1200 x 1000 x 975
Int. (mm)	1140 x 940 x 790
Volume (L)	847
Load cap. (Kg)	750
Folding ratio (%)	69

SmartLink enabled version with 2 runners, 2 feet and 2 drop doors

2559.A61 - Magnum Optimum®
Ext. (mm)	1200 x 1000 x 1125
Int. (mm)	1140 x 940 x 940
Volume (L)	1007
Load cap. (Kg)	500
Folding ratio (%)	74

SmartLink enabled version with 2 runners, 2 feet and 2 drop doors

2549.A80 - Magnum Optimum® Hopper
Ext. (mm)	1200 x 1000 x 1185
Int. (mm)	1140 x 940 x 975
Volume (L)	942
Load cap. (Kg)	500
Folding ratio (%)	55

SmartLink enabled version with 2 runners, 2 feet and hopper base

2500.880- Magnum Optimum® Hopper
Ext. (mm)	1200 x 800 x 1210
Int. (mm)	1142 x 742 x 987
Volume (L)	725
Load cap. (Kg)	500
Folding ratio (%)	57

SmartLink enabled version with 2 runners, 2 feet and hopper base

2630.710 - Magnum Smooth Wall HD
Ext. (mm)	800 x 600 x 835
Int. (mm)	740 x 540 x 685
Volume (L)	274
Load cap. (Kg)	700
Folding ratio (%)	53

SmartLink Availabilty status version with 2 runners and 2 drop doors

FLC Lids

2506.820 - Magnum Optimum® Lid
Ext. (mm)	1210 x 810x 73

Suitable for Magnum Optimum 1208

9347.000 - Magnum Optimum® Lid
Ext. (mm)	1200 x 1000 x 50

Suitable for Magnum Optimum 1210

Schoeller Allibert

Schoeller Allibert

Rigid Pallet Container (RPC)

Schoeller Allibert's RPC's are ideal for heavy-duty distribution applications and are automation-friendly. They are designed to improve space efficiency and optimize truck loads.

4429.100 - Maxilog

Ext. (mm)	1200 x 1000 x 760
Int. (mm)	1108 x 908 x 574
Volume (L)	610
Load cap. (Kg)	450
Max. static load (Kg)	4500

Solid version with 4 feet

4429.300 - Maxilog

Ext. (mm)	1200 x 1000 x 760
Int. (mm)	1108 x 908 x 574
Volume (L)	610
Load cap. (Kg)	450
Max. static load (Kg)	4500

Solid version with 3 runners

4601.400 - AgriLog

Ext. (mm)	1200 x 1000 x 581
Int. (mm)	1111 x 911 x 373
Volume (L)	446
Load cap. (Kg)	500
Max. static load (Kg)	4500

Perforated version with 4 feet

4601.500 - AgriLog

Ext. (mm)	1200 x 1000 x 591
Int. (mm)	1111 x 911 x 373
Volume (L)	446
Load cap. (Kg)	500
Max. static load (Kg)	4500

Perforated version with 2 runners

8182.400 - AgriPlus

Ext. (mm)	1200 x 1000 x 780
Volume (L)	640
Load cap. (Kg)	500
Max. static load (Kg)	4500

Perforated version with 4 feet

8182.500 - AgriPlus

Ext. (mm)	1200 x 100 x 790
Volume (L)	640
Load cap. (Kg)	500
Max. static load (Kg)	4500

Perforated version with 2 runners

8282.200 - JumboNest®

Ext. (mm)	1200 x 1000 x 784
Int. (mm)	884 x 701.5 x 600
Volume (L)	525
Load cap. (Kg)	600
Max. static load (Kg)	3200

Solid version with 2 runners and 2 feet, lid on demand

RPC Lid

4410.820 RPC Lid

Ext. (mm)	1212 x 1012 x 79

Lid suitable for Maxilog, AgriLog and AgriPlus

Pallets

Schoeller Allibert's pallets are designed to meet all logistics requirements. Durability, hygiene and safety are our pallets' main benefits. Our pallets are also available with RFID.

7842.001 - H1 pallet

Ext. (mm)	1200 x 800 x 166
Static load cap. (Kg)	5000
Dynamic load (Kg)	5000
Racking load (Kg)	850

Version with perforated top deck, 3 runners and 7mm safety rim

9372.000 - Maestro pallet

Ext. (mm)	1200 x 800 x 165
Static load cap. (Kg)	5000
Dynamic load (Kg)	1500
Racking load (Kg)	1000

Fully solid version, 3 runners and 7mm safety rim

8279.130 - BaYoPal

Ext. (mm)	1200 x 1000 x 165
Static load cap. (Kg)	6000
Dynamic load (Kg)	1500
Racking load (Kg)	1200

Version with perforated top deck, 3 runners, no safety rim and no anti-slip plugs

Rotationally moulded products

Schoeller Allibert's ChemiFlow is a reusable UN certified IBC and is fully adapted to meet the various needs of the chemical distribution and manufacturing industries.

8292.0AB - ChemiFlow®

Ext. (mm)	1200 x 1000 x 1323
Weight (Kg)	134
Volume (L)	1000
Maximum density	1.9 g/cm³
Stacking height (mm)	1308
UN number	31HH1/Y/[MM/YY]/ESA/ 02-G-289-01/2059/2200

Version with 3 runners and AB kit (DN50 EDPM valve, GRPP body and PPH ball. High flow vent in the lid and solid plug in the tank.)

8292.0BB - ChemiFlow®

Ext. (mm)	1200 x 1000 x 1323
Weight (Kg)	134
Volume (L)	1000
Maximum density	1.9 g/cm³
Stacking height (mm)	1308
UN number	31HH1/Y/[MM/YY]/ESA/ 02-G-289-01/2059/2200

Version with 3 runners and BB kit (DN50 Viton valve, GRPP body and PPH ball. High flow vent in the lid and solid plug in the tank.)

Schoeller Allibert

How SmartLink works

SmartLink makes your assets 'intelligent'. It allows you to achieve wireless control and enable the proactive maintenance of your fleet. The built-in sensor tracks and receives data via a variety of networks (GPS, Wifi, BLE...) and transmits that data twice a day. This data can then be reported on to gain useful insights to support asset management and optimization decisions.

Schoeller Allibert's rental assets are equipped with a barcode label and a SmartLink tag. Each barcode label has a unique ID number and combined with the SmartLink tag enables the asset to be tracked and traced. After activating your assets, all data can be accessed on the Schoeller Allibert SmartLink platform.

SmartLink sensor data

- Geolocation
- Temperature — TEMPERATURE
- Fill level — FILL LEVEL
- Humidity status — HUMIDITY
- Battery level
- Geo Fencing
- Availability status — OPEN, LID OPEN, IMPROPER USE, FOLDED, LID CLOSED
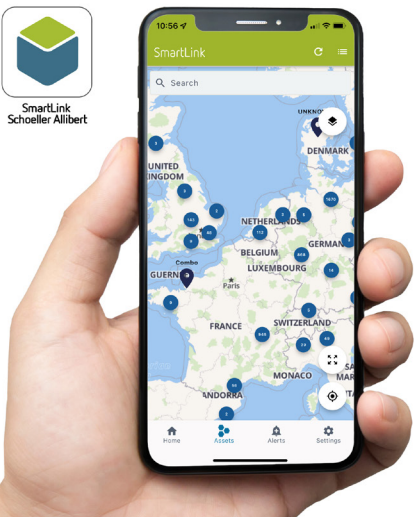- CarbonLink — CO_2 CARBONLINK

What's in it for you?

- Supply chain optimization
- Reduced levels of theft
- State of the art assets
- SmartLink asset tracking
- Flexibility to quickly scale up or down
- Avoid storing expensive empty containers
- No down payment
- Lower insurance costs
- Fixed rent amount
- Asset recycling
- Information on which assets are available or in use

What happens with returned assets?

When assets are returned, they get thoroughly washed, inspected and, if necessary, repaired. Schoeller Allibert will reuse all assets, meaning that our customers can replace their inefficient legacy fleet with best-in-class RTP containers. After its long working life, materials are not wasted, they get recycled and reused to create new high-quality assets.

SmartLink
Schoeller Allibert

THE SMARTLINK APP

Track & trace your assets any time, anywhere

SCAN TO DOWNLOAD APP

Download on the App Store

GET IT ON Google Play

Schoeller Allibert