





Get in touch with your local sales representative for more details.
Visit us at: [schoellerallibert.com](https://www.schoellerallibert.com)

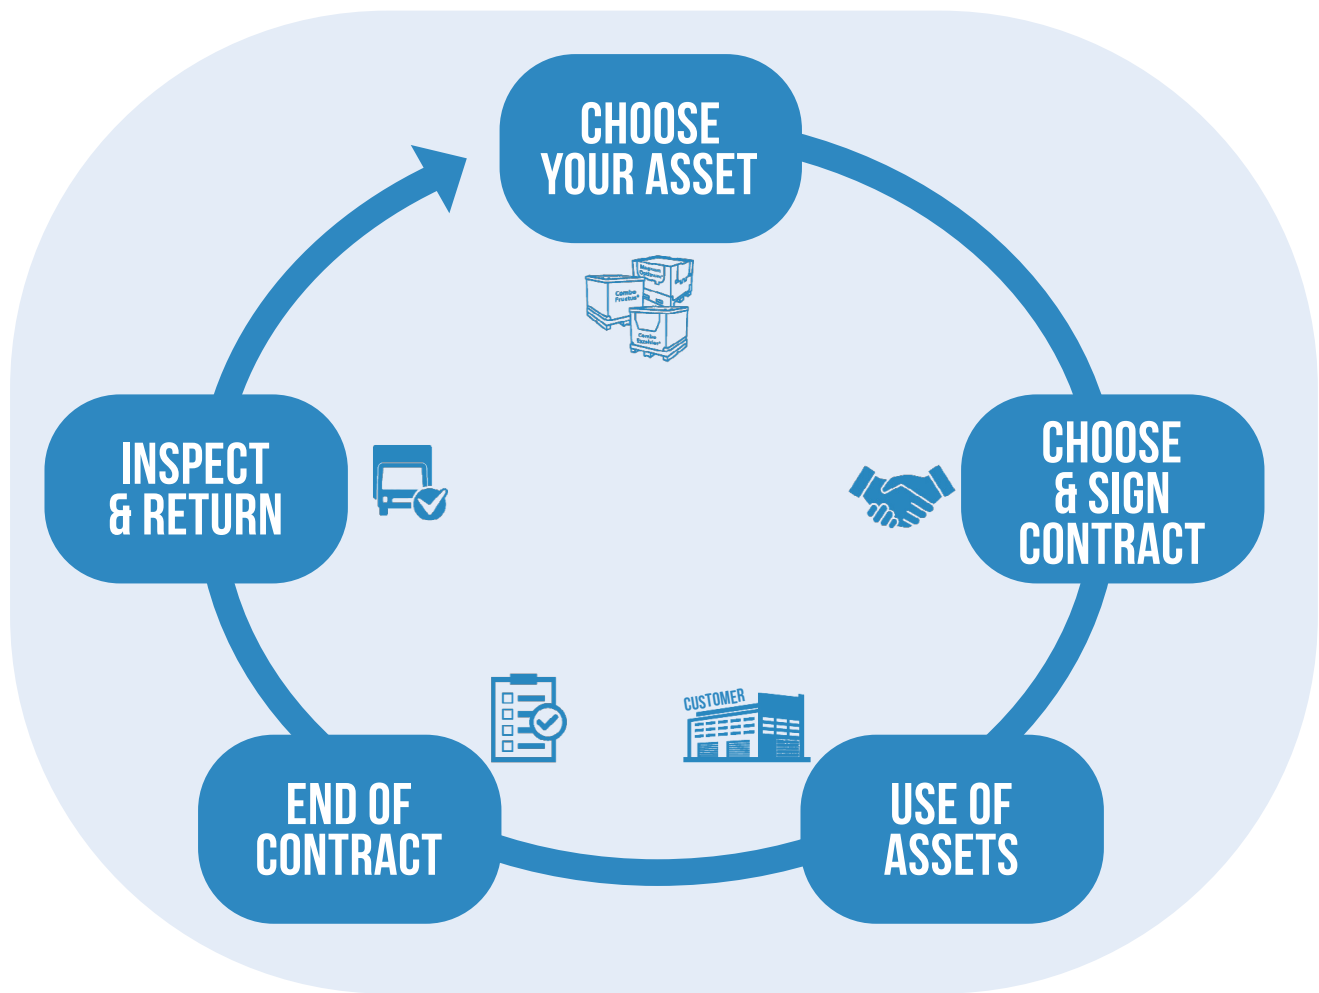

EFFICIENT BY DESIGN CIRCULAR BY NATURE

Schoeller Allibert

 Schoeller Allibert
Rental Offering

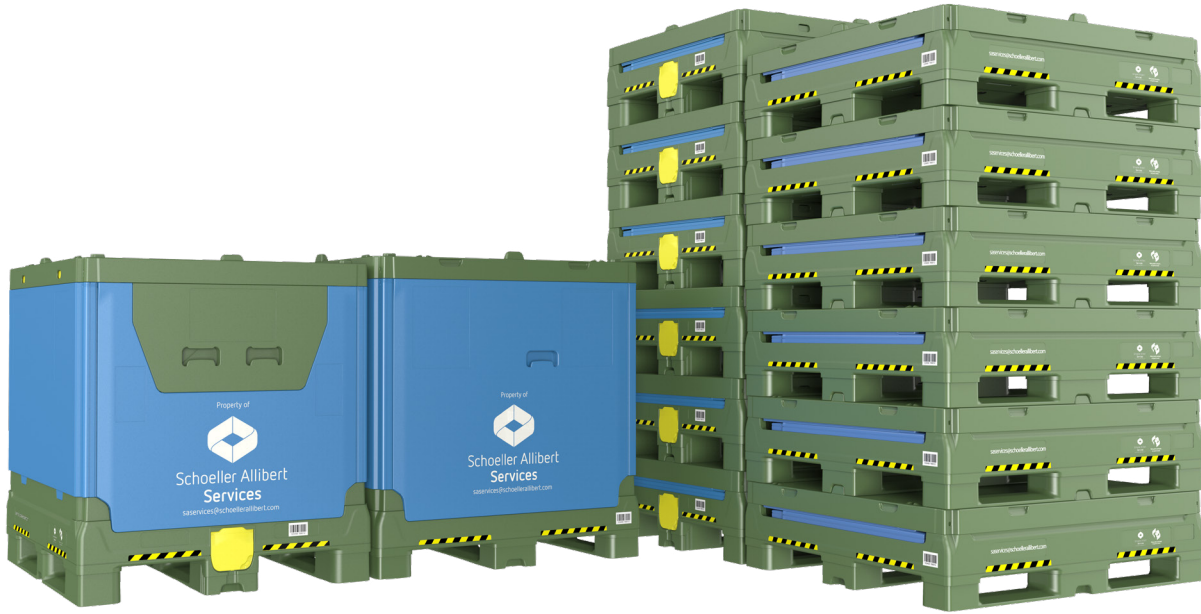

Schoeller Allibert
efficient by design ∞ circular by nature

Schoeller Allibert Sustainable Smart Solutions to Rent

Schoeller Allibert goes beyond providing high-quality plastic returnable transport packaging (RTP). Enhance your assets with SmartLink technology. This advanced feature enables detailed tracking and data-driven asset management. Choose Schoeller Allibert rental assets tailored to your needs, at a fixed rate and without the need for capital expenditure. Utilize SmartLink to gain crucial insights, optimizing your operational efficiency and sustainability initiatives.

SmartLink offers a suite of innovative solutions to revolutionize asset management and supply chain visibility:

- **Easy-to-Use Platform:** Automated and intuitive interface for streamlined fleet oversight.
- **Real-Time Reporting:** Instant, scheduled updates on fleet status for optimal asset use.
- **KPI Management:** Direct KPI setting and reporting for supplier and customer accountability.
- **Asset Tracking & Tracing:** Enhanced supply chain visibility with robust features.
- **ERP Integration:** Boost compliance and efficiency with seamless ERP integration.
- **Asset Visualization:** Clear mapping to analyze and optimize supply chain flow.

Next-gen features:

- **Availability Status:** Immediate asset status to avoid downtime.
- **Fill Level Monitoring:** Smart inventory management for liquids and solids.
- **Temperature & Humidity Tracking:** Protect sensitive goods with temperature and humidity monitoring.



SCHOELLER ALLIBERT RENTAL OFFERING

Intermediate Bulk Containers (IBC)

Schoeller Allibert's IBC's are suitable for food, pharmaceutical, non-hazardous chemical and non-chemical products handling and transport. Our Foldable IBC provides 100% hygiene, safety maximum cost savings on return trips.

5602.303 - Combo Excelsior Hybrid®	
Ext. (mm)	1219 x 1016 x 1147
Int. (mm)	1134 x 934 x 943
Volume (L)	1000
Load cap. (Kg)	1500
Folding ratio (%)	67

5600.203 - Combo Fructus® 300	
Ext. (mm)	1219 x 1118 x 1125
Int. (mm)	1147 x 1045 x 943
Volume (L)	1135
Load cap. (Kg)	1500
Folding ratio (%)	71

Version with 3 runners, ideal for seafreight

4430.B20 - Combo Life 65	
Ext. (mm)	805 x 609 x 833
Volume (L)	250
Load cap. (Kg)	350
Folding ratio (%)	54

Version with 3 runners and bottom discharge

5600.103 - Combo Fructus® 280	
Ext. (mm)	1219 x 1118 x 1064
Int. (mm)	1147 x 1045 x 882
Volume (L)	1060
Load cap. (Kg)	1500
Folding ratio (%)	70

Version with 3 runners, ideal for refrigerated sea freight

5600.303 - Combo Fructus® 315	
Ext. (mm)	1219 x 1118 x 1186
Int. (mm)	1147 x 1045 x 1004
Volume (L)	1192
Load cap. (Kg)	1500
Folding ratio (%)	73

Version with 3 runners, ideal for road and rail transportation

4420.038 - Combo Life 285	
Ext. (mm)	1155 x 1155x 1132
Int. (mm)	1051 x 1031 x 924
Volume (L)	1030
Load cap. (Kg)	1400
Folding Ratio (%)	60

Version with 3 runners, bottom discharge and drop door

Foldable Large Containers (FLC)

Schoeller Allibert's FLC's are the most efficient reverse logistics solution: with the lowest folded height on the market, Magnum Optimum® can be folded up to 9 units high in a standard truck and up to 11 units in a mega truck.

2500.A61 - Magnum Optimum®	
Ext. (mm)	1200 x 800 x 960
Int. (mm)	1142 x 742 x 785
Volume (L)	665
Load cap. (Kg)	750
Folding ratio (%)	69

SmartLink enabled version with 2 runners, 2 feet and 2 drop doors

2510.A51 - Magnum Optimum®	
Ext. (mm)	1200 x 1000 x 595
Int. (mm)	1140 x 940 x 410
Volume (L)	439
Load cap. (Kg)	750
Folding ratio (%)	34

SmartLink enabled version with 2 runners and 2 feet

2549.B61 - Magnum Optimum®	
Ext. (mm)	1200 x 1000 x 975
Int. (mm)	1140 x 940 x 790
Volume (L)	847
Load cap. (Kg)	750
Folding ratio (%)	69

SmartLink Availability status version with 2 runners, 2 feet and 2 drop doors

2559.A61 - Magnum Optimum®	
Ext. (mm)	1200 x 1000 x 1125
Int. (mm)	1140 x 940 x 940
Volume (L)	1007
Load cap. (Kg)	500
Folding ratio (%)	74

SmartLink enabled version with 2 runners, 2 feet and 2 drop doors

2510.A80 - Magnum Optimum® Hopper	
Ext. (mm)	1200 x 1000 x 805
Int. (mm)	1140 x 940 x 595
Volume (L)	535
Load cap. (Kg)	500
Folding ratio (%)	33

SmartLink enabled version with 2 runners, 2 feet and hopper base

2550.A80 - Magnum Optimum® Hopper	
Ext. (mm)	1200 x 1000 x 1210
Int. (mm)	1140 x 940 x 1000
Volume (L)	968
Load cap. (Kg)	500
Folding ratio (%)	56

SmartLink enabled version with 2 runners, 2 feet and hopper base

2549.A94 - Magnum Optimum® Optishute	
Ext. (mm)	1200 x 1000 x 975
Int. (mm)	1140 x 940 x 790
Volume (L)	847
Load cap. (Kg)	250
Folding ratio (%)	65

SmartLink enabled version with 2 runners, 2 feet, 1 drop door and translucent shute door. Lid included

2500.880 - Magnum Optimum® Hopper	
Ext. (mm)	1200 x 800 x 1210
Int. (mm)	1142 x 742 x 987
Volume (L)	725
Load cap. (Kg)	500
Folding ratio (%)	57

SmartLink enabled version with 2 runners, 2 feet and hopper base

2630.710 - Magnum Smooth Wall HD	
Ext. (mm)	800 x 600 x 835
Int. (mm)	740 x 540 x 685
Volume (L)	274
Load cap. (Kg)	700
Folding ratio (%)	53

SmartLink Availability status version with 2 runners and 2 drop doors

2506.820 - Magnum Optimum® Lid	
Ext. (mm)	1210 x 810x 73

Suitable for Magnum Optimum 1208

9347.000 - Magnum Optimum® Lid	
Ext. (mm)	1200 x 1000 x 50

Suitable for Magnum Optimum 1210

FLC Lids

Rigid Pallet Container (RPC)

Schoeller Allibert's RPC's are ideal for heavy-duty distribution applications and are automation-friendly. They are designed to improve space efficiency and optimize truck loads.



4429.100 - Maxilog	
Ext. (mm)	1200 x 1000 x 760
Int. (mm)	1108 x 908 x 574
Volume (L)	610
Load cap. (Kg)	450
Max. static load (Kg)	4500

Solid version with 4 feet



4601.400 - AgriLog	
Ext. (mm)	1200 x 1000 x 581
Int. (mm)	1111 x 911 x 373
Volume (L)	446
Load cap. (Kg)	500
Max. static load (Kg)	4500

Perforated version with 4 feet



8182.400 - AgriPlus	
Ext. (mm)	1200 x 1000 x 780
Volume (L)	640
Load cap. (Kg)	500
Max. static load (Kg)	4500

Perforated version with 4 feet



8282.200 - JumboNest®	
Ext. (mm)	1200 x 1000 x 784
Int. (mm)	884 x 701.5 x 600
Volume (L)	525
Load cap. (Kg)	600
Max. static load (Kg)	3200

Solid version with 2 runners and 2 feet, lid on demand



4429.300 - Maxilog	
Ext. (mm)	1200 x 1000 x 760
Int. (mm)	1108 x 908 x 574
Volume (L)	610
Load cap. (Kg)	450
Max. static load (Kg)	4500

Solid version with 3 runners



4601.500 - AgriLog	
Ext. (mm)	1200 x 1000 x 591
Int. (mm)	1111 x 911 x 373
Volume (L)	446
Load cap. (Kg)	500
Max. static load (Kg)	4500

Perforated version with 2 runners



8182.500 - AgriPlus	
Ext. (mm)	1200 x 100 x 790
Volume (L)	640
Load cap. (Kg)	500
Max. static load (Kg)	4500

Perforated version with 2 runners



4410.820 RPC Lid	
Ext. (mm)	1212 x 1012 x 79

Lid suitable for Maxilog, AgriLog and AgriPlus

Pallets

Schoeller Allibert's pallets are designed to meet all logistics requirements. Durability, hygiene and safety are our pallets' main benefits. Our pallets are also available with RFID.



7842.001 - H1 pallet	
Ext. (mm)	1200 x 800 x 166
Static load cap. (Kg)	5000
Dynamic load (Kg)	5000
Racking load (Kg)	850

Version with perforated top deck, 3 runners and 7mm safety rim



8279.130 - BaYoPal	
Ext. (mm)	1200 x 1000 x 165
Static load cap. (Kg)	6000
Dynamic load (Kg)	1500
Racking load (Kg)	1200

Version with perforated top deck, 3 runners, no safety rim and no anti-slip plugs



9372.000 - Maestro pallet	
Ext. (mm)	1200 x 800 x 165
Static load cap. (Kg)	5000
Dynamic load (Kg)	1500
Racking load (Kg)	1000

Fully solid version, 3 runners and 7mm safety rim

Rotationally moulded products

Schoeller Allibert's ChemiFlow is a reusable UN certified IBC and is fully adapted to meet the various needs of the chemical distribution and manufacturing industries.



8292.0AB - ChemiFlow®	
Ext. (mm)	1200 x 1000 x 1323
Weight (Kg)	134
Volume (L)	1000
Maximum density	1.9 g/cm³
Stacking height (mm)	1308
UN number	31HH1/Y/[MM/YY]/ESA/02-G-289-01/2059/2200

Version with 3 runners and AB kit (DN50 EDPM valve, GRPP body and PPH ball. High flow vent in the lid and solid plug in the tank.)



8292.0BB - ChemiFlow®	
Ext. (mm)	1200 x 1000 x 1323
Weight (Kg)	134
Volume (L)	1000
Maximum density	1.9 g/cm³
Stacking height (mm)	1308
UN number	31HH1/Y/[MM/YY]/ESA/02-G-289-01/2059/2200

Version with 3 runners and BB kit (DN50 Viton valve, GRPP body and PPH ball. High flow vent in the lid and solid plug in the tank.)


How SmartLink works


- Fit & Track:** Devices are seamlessly embedded to assets, enabling both indoor and outdoor tracking with a battery life of 3 to 5 years.
- Connect:** These devices transmit data via public networks, eliminating the need for additional infrastructure.
- Analyse & Act:** The data is available on a plug-and-play IoT platform that provides real-time analytics. This information drives business value by enabling actionable insights for decision-making.

END-TO-END (E2E) SUPPLY CHAIN DIGITIZATION >>> DIGITAL TRANSFORMATION

CarbonLink : Visualize Savings, Optimize Carbon Footprint

CarbonLink, powered by SmartLink, is an online tool that calculates CO2 savings by analyzing data from smart, connected assets. It measures the environmental impact of asset utilization, such as distance traveled and space saved, and presents the CO2 reduction in clear metrics, like saved truckloads and CO2 emissions (tCO2e). CarbonLink offers a visual snapshot of sustainability gains, making CO2 reduction efforts tangible and actionable.

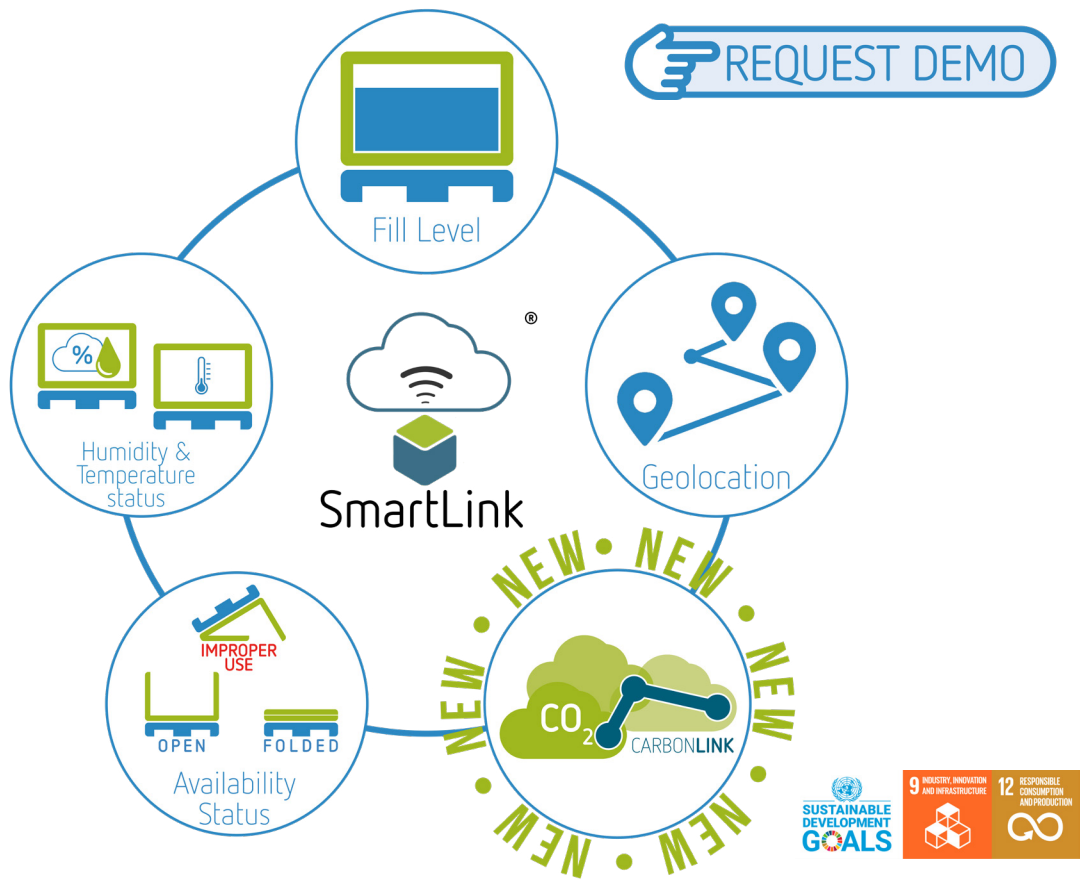

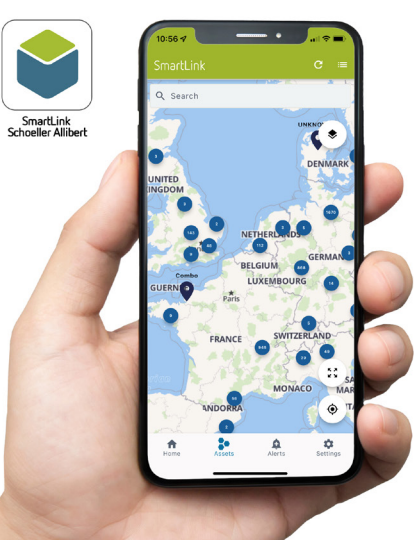

SmartLink
Schoeller Allibert

THE SMARTLINK APP

Track & trace your assets any time, anywhere



SCAN TO DOWNLOAD APP



Download on the App Store



GET IT ON Google Play