

# ProTank® Modular Tank

## Superior Stormwater Management

Designed to collect water at its source



### Product Information

ProTank® Modular Tanking System is a unique modular subsurface drainage system designed to collect water at its source and can be used in any soil type. ProTank® has the flexibility to infiltrate, attenuate, detain or harvest water for re-use. Its lightweight, strong structural design, modular nature, high void surface area and storage volume up to 90% of the excavated area makes the product ideal for underground rainwater harvesting, infiltration, attenuation tanking system for domestic & commercial applications, Grass swales systems, retrofits of open concrete channels, roadside drainage systems, grey water & septic leach fields.

### Applications

ProTank® can be installed under driveways, car parks, roads, landscaped areas and other trafficable applications.




# ProTank® Modular Tank

## Benefits

- Manufactured from premium quality recycled resin to meet the most demanding performance requirements.
- Generous internal and surface void area provides optimum storage and/or infiltration capacity.
- Easy access via specially designed ports on every surface of the module. This ensures trouble free access and maintenance.
- No requirement for imported drainage aggregate or special fill.
- Low cost, light weight and fast safe installation.
- Can be installed as a 'single block gallery' or 'finger gallery' to accommodate a variety of hydraulic conditions and space allowances.

## Features

- Economical alternative to traditional granular methods
- Infinite storage sizes available
- Lightweight and easy to install
- Replacement for aggregate drainage treatments
- Water detention
- Water storage

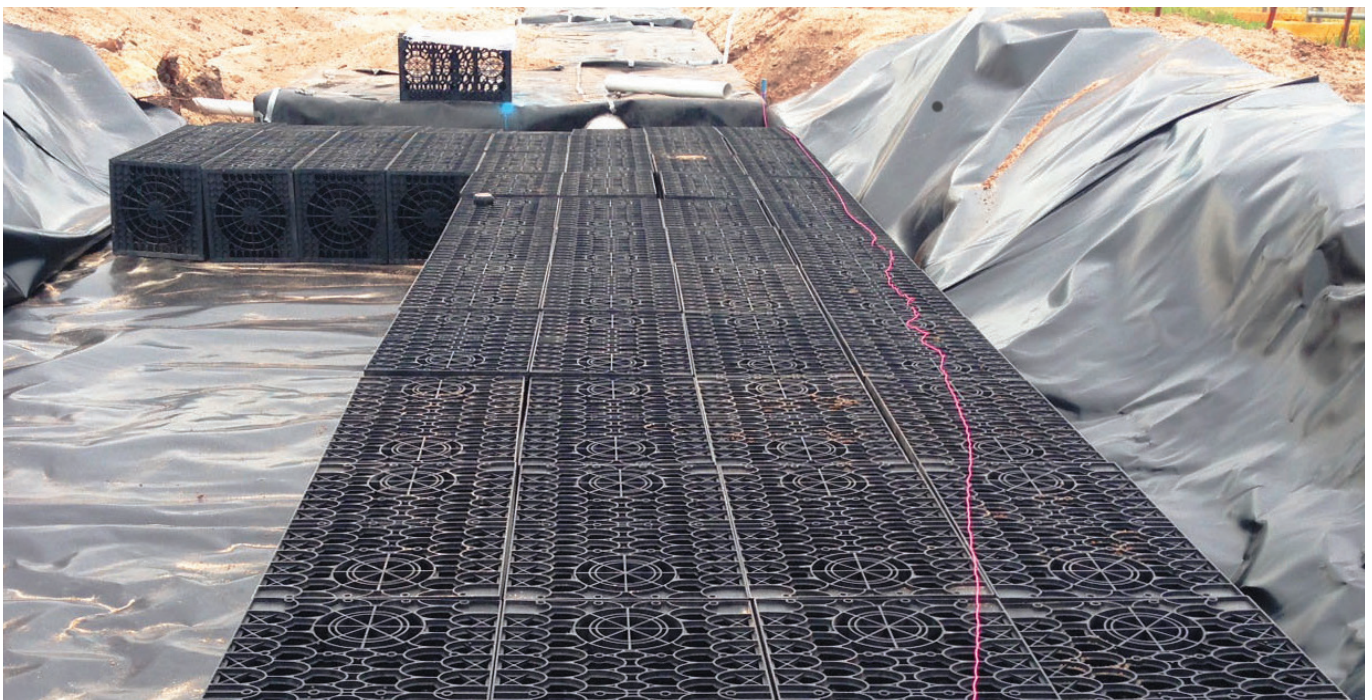

# ProTank® Modular Tank

## Product Data Sheet

Module (units)	Width (mm)	Length (mm)	Height (mm)	Typical Tank Volume (litres)	Typical Storage Volume (litres)
Single (one)	403	720	443	129	123
Double (two)	403	720	866	252	239
Triple (three)	403	720	1289	374	355
Quad (four)	403	720	1712	497	472
Penta (five)	403	720	2135	620	589

**Internal Void Ratio**

95% Void

**Material**

100% recycled polypropylene + customised polymers can be utilised for special projects

**Biological and Chemical Resistance**

Unaffected by mould and algae, soil-borne chemicals, bacteria and bitumen, oil and light acid or alkaline solutions

**Service Temperature**

-10°C to 85°C

**Flow Rate**

2400 L/minute per single module area @ i = 0.01

Module Configuration	Compressive Strength Unconfined*	Minimum Recommended Cover	Maximum Recommended Cover	Maximum depth to bottom of Tank	Maximum height of Modules
Standard Duty Three Plate Module	21 T/m <sup>2</sup>	300mm	1200mm	2400mm	1712 (4 high)
Heavy Duty Four Plate Module	24 T/m <sup>2</sup>	600mm	2000mm	3000mm	2135 (5 high)
Ultra Duty Five Plate Module	28 T/m <sup>2</sup>	600mm	2000mm	3000mm	2135 (5 high)

\*Note: -10% tolerance

- Compressive strength results are derived from testing in an 'unconfined state', meaning that these are index tests which are more conservative than in-ground, backfilled and compacted conditions.
- Standard Duty Modules are not recommended for trafficable ('ride on vehicle') applications.
- Minimum and Maximum cover recommendations for Heavy and Ultra Duty Modules allow for 'light commercial' vehicles only. Applications for higher dynamic loads should be assessed separately by the project engineer.
- ProTank® modules must be installed in accordance with the 'ProTank® Assembly and Installation Guidelines'.



# About Us

## Leaders in Geosynthetics

Global Synthetics is a 100% Australian-owned company, proud to offer a complete range of high-quality geosynthetic products backed by over 200 years of combined staff experience in the industry.

We have supplied products to some of the largest recent infrastructure works in Australia. Global Synthetics provides major benefits to any geotechnical engineering project with the right products and our technical expertise.

Global Synthetics products are used in the following applications:

- Pavement Stabilisation
- Ground Improvement
- Soil Reinforcement and Retaining Structures
- Water Management
- Drainage Systems & Hydraulic Works
- Landfills
- Coastal Erosion Structures

## Get in Touch

### AUSTRALIA

#### Website

[globalsynthetics.com.au](http://globalsynthetics.com.au)

#### Email

[info@globalsynthetics.com.au](mailto:info@globalsynthetics.com.au)

#### New South Wales

(02) 9725 4321

#### North Qld

(04) 5921 1692

#### Victoria/Tasmania

(03) 9791 1772

#### Queensland

(07) 3865 7000

#### South Australia

(08) 8384 8894

#### Western Australia

(08) 9459 4300

### NEW ZEALAND

#### Website

[globalsynthetics.co.nz](http://globalsynthetics.co.nz)

#### Email

[info@globalsynthetics.co.nz](mailto:info@globalsynthetics.co.nz)

#### Auckland

0800 510 120

#### Christchurch

0800 510 120



All information provided in this publication is correct to the best knowledge of the company and is given out in good faith. The information presented herein is intended only as a general guide to the use of such products and no liability is accepted by Global Synthetics Pty Ltd for any loss or damage however arising, which results either directly or indirectly from the use of such information. Global Synthetics Pty Ltd have a policy of continuous development so information and product specifications may change without notice.



Global Synthetics  
LEADERS IN GEOSYNTHETICS