



XOLO-LED

IP 66

5 year warranty



Application: The lighting fixture XOLO-LED is suitable for lighting of outdoor areas, main and side roads of towns and villages, car parks and industrial premises.

Ballast: EP – electronic 220-240 V/50/60Hz

Light source: LED, 4000K, CRI +70, MacAdam3

Diffuser: Hardened safety glass

Housing: Aluminium casting, grey colour RAL 9006

Optics: **BW** Lighting fixtures with this type of optics are designed for lighting of roads and outdoor car parks.

SQ Lighting fixtures with this type of optics are designed for installation in the middle of an illuminated area, they are commonly used for commercial parking spaces.

W Lighting fixtures with this type of optics are ideal for lighting of narrow paths and walkways.

AS Lighting fixtures with this type of optics are ideal for lighting of pedestrian crossings with right-hand traffic.


Fastening: For bracket columns and masts with diameter of 48 - 60mm **Connection:** Screwless three-pole terminal block, maximum diameter of wires 2.5

mm **Standard equipment:** Cable gland M20 for diameter of cable 7-12 mm

Calculated lifetime – LED modules:


L80B20 ta40°C – 80 000h

XOLO-AS

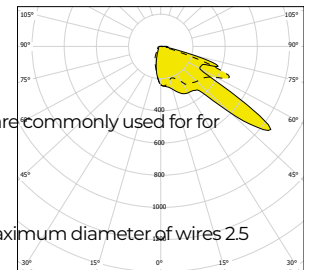


— C0-C180 - - - - C90-C270

XOLO-BW

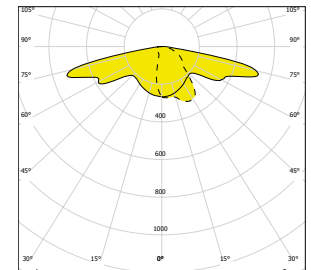


— C0-C180 - - - - C90-C270

XOLO-SQ

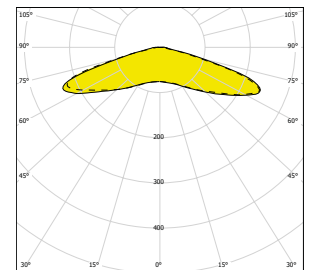


— C0-C180 - - - - C90-C270

XOLO-W

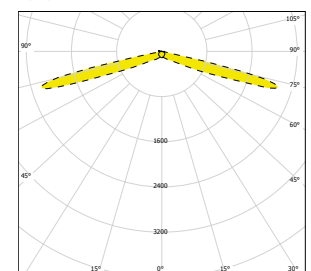

— C0-C180 - - - - C90-C270

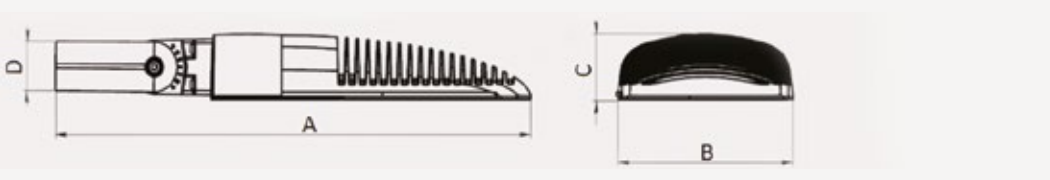

Order number	Name	Lighting fixture luminous flux (lm)	Power input (W)	Rated power output (lm/W)	Ta max (°C)	Dimensions of lighting fixture AxBxC (mm)	Weight (kg)
058950	XOLO-LED-W-4300 -4K	3380	25	135	50	722x265x91	10
058953	XOLO-LED-W-6200-4K	4845	40	121	50	722x265x91	10
058951	XOLO-LED-BW-6200-4K	5056	40	126	50	722x265x91	10
058955	XOLO-LED-BW-8100-4K	6739	56	120	50	722x265x91	10
058958	XOLO-LED-BW-12000-4K	10016	78	128	50	722x265x91	10
058961	XOLO-LED-BW-14500-4K	11788	95	124	50	722x265x91	10
058964	XOLO-LED-BW-16000-4K	13479	112	120	50	722x265x91	10
058967	XOLO-LED-BW-18500-4K	15024	117	128	50	722x265x91	10
058970	XOLO-LED-BW-23500-4K	20219	168	120	50	722x265x91	10
058952	XOLO-LED-SQ-6200-4K	5392	40	135	50	722x265x91	10
058956	XOLO-LED-SQ-8100-4K	7187	56	128	50	722x265x91	10
058959	XOLO-LED-SQ-12000-4K	10681	78	137	50	722x265x91	10
058962	XOLO-LED-SQ-14500-4K	12571	95	132	50	722x265x91	10
058965	XOLO-LED-SQ-16000-4K	14374	112	128	50	722x265x91	10
058968	XOLO-LED-SQ-18500-4K	16022	117	137	50	722x265x91	10
058971	XOLO-LED-SQ-23500-4K	21562	168	128	50	722x265x91	10
058954	XOLO-LED-AS-6200-4K	5143	40	129	50	722x265x91	10
058957	XOLO-LED-AS-8100-4K	6855	56	122	50	722x265x91	10
058960	XOLO-LED-AS-12000-4K	10188	78	131	50	722x265x91	10
058963	XOLO-LED-AS-14500-4K	11991	95	126	50	722x265x91	10
058966	XOLO-LED-AS-16000-4K	13711	112	122	50	722x265x91	10
058969	XOLO-LED-AS-18500-4K	15282	117	131	50	722x265x91	10
058972	XOLO-LED-AS-23500-4K	20567	168	122	50	722x265x91	10

Tolerance of luminous flux and power input of the lighting fixture +/- 10%

Accessories on request

141116 pole reduction 50/60

Lighting fixture detail



On request

2.7K-6.5K - colour temperature

DIM - DALI, MIDNIGHT, BILEVEL, AMP DIM, REDUCTION

(MIDNIGHT, BILEVEL, REDUCTION - dimming according to the programmed parameters)

AMP DIM - (dimming according to the voltage in the distribution network)