



GREY-LED

IP 66

5 year warranty



Usage: Dust proof reflector LED lighting fixture GREY-LED of IP66 degree of protection is intended for illumination of indoor as well as outdoor areas, e.g. billboards, sports facilities, parking-sites, stores, outdoor work areas.

Ballast: EP – electronic - 220–240V, 50/60Hz, 220–240V, 0Hz

Body: Aluminium casting, black colour, RAL 9005, MATT

Cover: Hardened safety glass


Optics:
 S – optics with beam characteristic of symmetrical flood-light
 AS – optics with beam characteristic of asymmetrical flood-light
 H – optics with beam characteristic of symmetrical down-light
 AH – optics with beam characteristic of asymmetrical down-light

Fastening: At the bearing surface by means of positionable bracket

Connection: Screw-free, three-pole terminal strip, maximum conductor section area 2.5 mm²

Standard equipment: 1x packing gland including sealing

Calculated service life of LED modules: L80B10 ta50°C – 60 000h

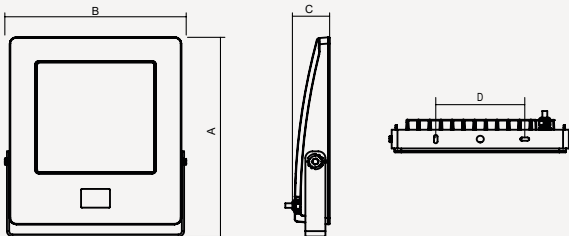


S	AS	H	AH
056920	056921	056922	056923
056924	056925	056926	056927
056928	056929	056930	056931
056932	056933	056934	056935
056936	056937	056938	056939

Order number	Name	Lighting fixture luminous flux (lm)	Power input (W)	Rated power output (lm/W)	Ta max (°C)	Dimensions of lighting fixture A x B x C (mm)	Mounting spacing D (mm)	Weight (kg)
4000K								
056920	GREY-LED-S-17000-4K	15933	103	155	60	480 x 400 x 80	200	10
056924	GREY-LED-S-18500-4K	17191	113	152	55	480 x 400 x 80	200	10
056928	GREY-LED-S-21000-4K	19631	133	148	50	480 x 400 x 80	200	10
056932	GREY-LED-S-24500-4K	23108	164	141	55	480 x 400 x 80	200	10
056936	GREY-LED-S-29500-4K	27450	206	133	45	480 x 400 x 80	200	10


Tolerance of luminous flux and power input of the lighting fixture +/- 10%

GREY-LED-S (symmetrical flood-light)




CO-C180 - - - - C90-C270

GREY-LED-AH (asymmetrical down-light)

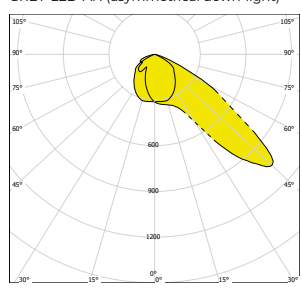


CO-C180 - - - - C90-C270

GREY-LED-H (symmetrical down-light)



CO-C180 - - - - C90-C270

GREY-LED-AS (asymmetrical flood-light)



CO-C180 - - - - C90-C270

STL International Ltd

Hill Farm, Linton Hill, Maidstone, Kent, ME17 4AL, UK T. +44 (0)1622 749633 eMail. solutions@stl-int.co.uk Web. www.stl-int.co.uk