




GHOSTSHIELD.COM // 1 (855) 573-8383

© 2023 KreteTek Industries, Inc.

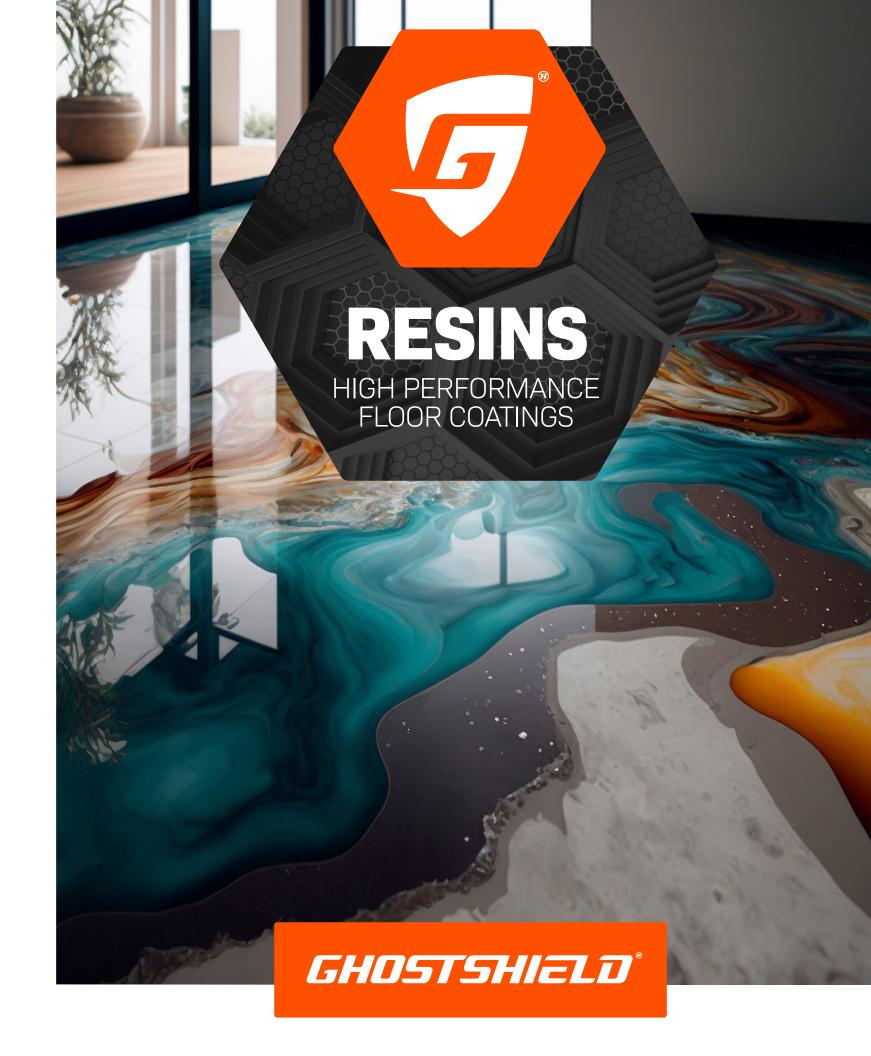

BASE COAT SOLUTIONS



EPOXY MAX™ 100

100% SOLIDS BASE COAT

Two-component, 100% solids, self-leveling epoxy designed to coat concrete floors with high and low build capabilities. Has excellent impact and chemical resistance. Combines the highest quality epoxy resins and is the perfect base coat for any clear, solid color, flake and/or metallic epoxy floor system.

Sizes: 3 Gallon Kit

Function	Base Coat
Carrier	N/A
Solids	100%
Coverage*	50-150 ft²/gallon
Components	2
Thickness	10-30 mils WFT
VOC Level	<30 g/L

VAPOR-TEK™ 440

MOISTURE VAPOR BARRIER (MVB)

Our formulas are designed to offer infinite design possibilities and the ability to customize and optimize colors, patterns, and finishes.

A revolutionary two-component epoxy coating designed to control moisture vapor emission rates up to 20lb / 24hr / 1,000ft. It reduces the permeance of moisture vapor through concrete substrates to levels that are acceptable for the application of epoxy floor systems, vinyl, rubber, tile, cementitious overlays, terrazzo, wood, or carpet. Meets ASTM F3010 for vapor permeance.

Finishes: High Gloss

Function	MVB / Primer
Carrier	N/A
Solids	100%
Coverage*	100 ft ² /gallon
Components	2
Thickness	16 mils WFT
VOC Level	<30 g/L

GHOSTSHIELD®

EPOXY FLOORS

RISE ABOVE THE COMPETITION

Our Ghostshield Resin Floors offer exceptional performance even in the most challenging environments. Our floor systems resist chemicals, abrasions, and impacts, ensuring long-lasting durability.

More solutions, more spaces. It's not just about offering a product; it's about delivering a solution. With our turnkey approach, we ensure that you have everything required to satisfy the requirements of architects, engineers, contractors, facility managers, and



300-500 ft²/gallon 2-5 mils WFT

ARMOR-TEK™ 830

POLYSILOXANE TOP COAT

A high performance, two-component, high solids, isocyanate-free, epoxy polysiloxane floor coating that provides superior resistance against abrasion, chemicals, corrosion, UV exposure and weathering. Armor-Tek[™] 830 provides the benefits of a high performance epoxy and polyurethane in one coating.

Finishes: High Gloss, Satin

TOP COAT SOLUTIONS |



unction	Top Coat
Carrier	Solvent
Solids	93%
Coverage*	150-200 ft²/gallon
Components	2
Thickness	8 mils WFT
OC Level	<250 g/L

POLYASPARTIC 930

This long setting / fast cure polyaspartic is a twocomponent coating designed to protect concrete floors, epoxies, metallics, and flakes by providing incredible UV protection, abrasion, and chemical resistance. Recommended for areas with high risk of exposure to chemical spills, fuel, and heavy equipment. Rapid cure is ideal for commercial floors that require minimal downtime

Finishes: High Gloss



Function	Top Coat
Carrier	Solvent
Solids	96%
Coverage*	500-800 ft ² /gallon
Components	3
Thickness	2-3 mils WFT
VOC Level	95 g/L

MAX WEAR URETHANE™ 960

High solids, three-component urethane designed to be a tough, durable top coat for epoxy floor systems. Provides outstanding UV stability, incredible abrasion resistance while remaining durable and flexible. Recommended for high traffic areas such as industrial warehuses and auto repair shops.

Sizes: 1 Gallon Kit



CERTIFIED APPLICATOR

BECOME A PARTNER

You'll get exclusive benefits like discount pricing, rewards, project leads, and on-site training.



SOLID COLOR SYSTEM

EPOXY MAX™ 100

UNLIMITED OPTIONS

ARMOR-TEK™ 930 **METALLIC SWIRL** EPOXY MAX™ 100

METALLIC SYSTEM

EPOXY MAX™ 100

FLAKES / CHIP SYSTEM

POLYASPARTIC 930

















































