

Sections

09 09 96 00
High Performance Coatings

WEAR-TEK® 4400

HIGH PERFORMANCE, SINGLE COMPONENT MOISTURE CURE, ALIPHATIC URETHANE COATING THAT PRODUCES A TOUGH GLOSSY, HARD-WEARING CHEMICALLY RESISTANT SURFACE.

Description

Wear-Tek®4400 is a solvent based single component cyclo-aliphatic urethane coating. It produces a tough, glossy, hard-wearing and chemically resistant surface for the protection of concrete, wood and other approved substrates.

Wear-Tek®4400 is available as a transparent, glossy coating or as a pigmented colored material that possesses excellent hydrolytic stability and ultra-violet radiation resistance as

well as high tensile strength while accommodating movement.

Solids

48%

Appearance/color

Available in clear and variety of standard and custom colors


Coverage

300 ft²/gallon


IMPACT RESISTANCE
WATER ABSORPTION, TENSILE STRENGTH
WEATHERING

Meets the requirements of:

- ASTM D 2240, ASTM D 412
- ASTM D570-77, ASTM D 1474,
- ASTM D 1044, ASTM C 711
- ASTM G 23, ASTM D 1654

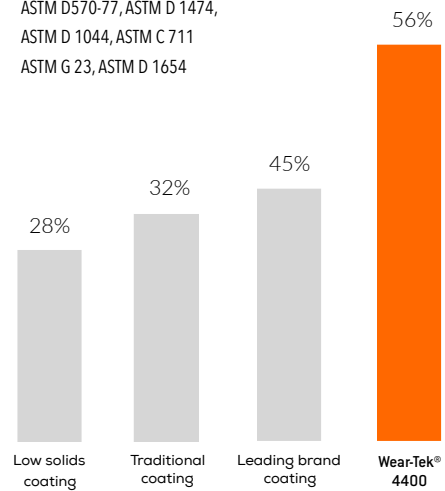

Percentage Improvement vs. Control

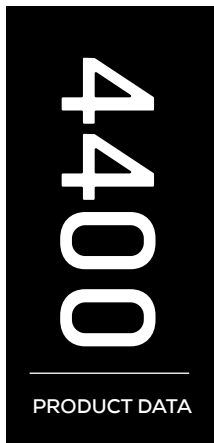

Sections

09 09 96 00
High Performance Coatings



Technical Data Sheet

TECHNOLOGY // ADVANTAGES

- **Composition** - 48% solids nanotechnology driven high-performance moisture cure single component aliphatic urethane coating
- **May be used over concrete**, wood and other approved substrates
- **Provides a long service life** without loss of flexibility
- **Accommodates normal substrate movement** and thermal stresses
- **High strength**, tenacious adhesion to many surfaces
- **Maintains a cleanable, attractive**, hygienic surface, easily scrubbed and cleaned
- **Increases friction** to improve traction
- **Protects substrates from chemical attack** and corrosion, withstands heavy use and environmental attack
- **Long term color retention**, highly fade resistant
- **Penetrates into concrete surfaces** to seal and waterproof floors, walls and decks, providing a solid clear or colored finish
- **Provides a tough color-fast finish** on roof top decks and walkable metal roofs

TYPICAL PROPERTIES

Appearance - Available in clear and variety of standard and custom colors

Packaging - 1 gallon (3.78 L), 5 gallon (18.9 L) pails

VOC's - 300 g/L maximum

Recommended Thickness - 3 mils dry (DFT)


Shelf Life - 1 year (unopened) from date of manufacture

APPLICATIONS

- Interior/Exterior
- Horizontal/Vertical
- Stadiums/Buildings
- Balconies
- Plazas
- Bridge decks
- Stairways/Walkways
- Parking garages

SUBSTRATES

- Concrete, brick, masonry
 - Wood, metal, rubber, plastic composites
-

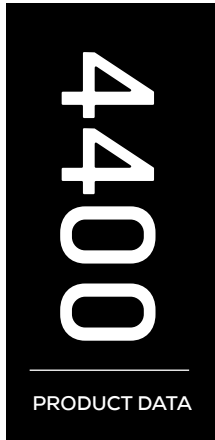

Technical Data Sheet

Sections

09 09 96 00
High Performance Coatings

TESTING DATA

TEST METHOD	TYPE	RESULTS
<p>ASTM D 2240 Standard Test Method for Rubber Property–Durometer Hardness</p>	Shore "A" Hardness	95
<p>ASTM D412 Tensile Set of Rubber and Thermoplastic Elastomers</p>	Tensile Strength	4000 psi
<p>ASTM D412 Tensile Set of Rubber and Thermoplastic Elastomers</p>	Elongation	10%
<p>ASTM D 1044 Standard Test Method for Resistance of Transparent Plastics to Surface Abrasion</p>	Solids Content	48% (B.W); 44% (B.V.)
<p>FTSM 141A (M4293) Flashpoint</p>	Flashpoint	105° F
<p>ASTM C 711 Standard Test Method for Low-Temperature Flexibility and Tenacity of One-Part, Elastomeric, Solvent-Release Type Sealants</p>	Flexibility at Low Temperatures	180° bend @ 20°F
<p>ASTM D 1474 Standard Test Methods for Indentation Hardness of Organic Coatings</p>	Impact Resistance (4mm indent)	Pass
<p>ASTM D570-77 Water Absorption 24 Hour/Equilibrium</p>	Water Absorption	0
<p>ASTM G 23 Practice for Operating Light-Exposure Apparatus (Carbon-Arc Type) With and Without Water for Exposure of Nonmetallic Materials</p>	Weatherometer (5000 hours)	Pass

Test results are averages obtained in a controlled environment, material and curing conditions of 75°F and 50% relative humidity. Reasonable variations should be expected .



Sections

09 09 96 00
High Performance Coatings

APPLICATION

Surface Prep

1. The concrete substrate to be coated must be clean, dry, and completely free of loose particles, grease, oil, or any substance that would interfere with proper bond.
2. Surface and air temperatures must be at least 35°F during application. Surface and air temperatures should not exceed 95°F. Keep material from freezing. Do not apply during inclement weather or when inclement weather is expected within 12 hours. Application must be protected from precipitation for at least 4 hours.
3. Protect people, property, vehicles, window glass, roofing materials, plastic products, shrubbery, landscaping and all surfaces not set for treatment from overspray.

Application

Wear-Tek®4400 may be applied by brush or airless spray technique in a thin, even coat. Care should be taken to avoid creating foam or trapping air bubbles which may later result in pinholes or hazing. If traction enhancement is required, iron-free sharp white quartz sand or Soft Sand Rubber Granules may be broadcast onto the wet Wear-Tek®4400. After the first coat has thoroughly dried with the embedded sand, a second coat of Wear-Tek®4400 is applied to thoroughly encapsulate the aggregate. Sized and graded sharp white quartz sand and Sand Rubber Granules are available from KreteTek Industries Inc.

Dry Time

Typical drying time for walking is 2 hours at 70°F and 50% relative humidity. Typical drying time for a full cure is 24 hours at 70°F and 50% relative humidity. Cooler temperatures or higher relative humidity can extend the drying time.

Clean Up

Clean equipment, tools and surfaces with xylene. Unused or old material may be disposed of in a waste disposal site in accordance with local, state and federal laws.

Precautions/Safety

Use appropriate safety equipment during application and handling. Please refer to the safety data sheet (SDS) for additional precautionary instructions before use.

Maintenance

To repair damaged areas, coarse sanding should be followed by thorough cleaning with fresh water. WearTek®-4400 may then be reapplied to the clean, dry surface.



Technical Data Sheet

Sections

09 09 96 00
High Performance Coatings

APPLICATION

Best Performance

- Proper application is the responsibility of the user.
- Make sure the most current versions of technical data sheets and safety data sheets are being used.
- Keep out of reach of children and pets.
- Store in a cool, dry place away from direct sunlight. Avoid opened containers, as moisture will cure the material.

Coverage

300 square feet per gallon. Variations in texture and porosity of substrate will affect the coverage and performance of the product.

KreteTek Industries Inc.

66 River Road
Hudson, NH 03051

www.Ghostshield.com

Customer Service and Technical Support

1-855-KreteTek (1-855-573-8383)

Warranty

KreteTek Industries Inc. warrants our products are manufactured to strict quality assurance specifications and that the information supplied by us is accurate to the best of our knowledge. Such information supplied about our products is not a representation or a warranty. It is supplied on the condition that you shall make your own tests to determine the suitability of our product for your particular purpose. Any use or application other than recommended herein is the sole responsibility of the user. Listed physical properties are typical and should not be construed as specifications. No warranty is made, expressed or implied, regarding such other information, the data on which it is based or the results you will obtain from its use. We shall have no liability for incidental or consequential damages, direct or indirect. No representative is authorized to make any representation or warranty or assume any other liability on our behalf with any sale of our products.

Acceptance of delivery of our product means that you have accepted the terms of this warranty whether or not purchase orders or other documents state terms that vary from this warranty. No representative is authorized to make any representation or warranty or assume any other liability on our behalf with any sales of our products. Our products contain chemicals that may cause serious physical injury. Before using, read the Safety Data Sheet and follow the precautions to prevent bodily harm.

Purchaser must determine the suitability of the products for the intended use and assumes all risks and liabilities in connection therewith. This information and all further technical advice are based on KreteTek Industries Inc. present knowledge and experience. However, KreteTek Industries Inc. assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights, nor shall any legal relationship be created by or arise from the provision of such information and advice. KreteTek Industries Inc. reserves the right to make any changes according to technological progress or further developments. The Purchaser of the Product(s) must test the product(s) for suitability for the intended application and purpose before proceeding with a full application of the product(s). Performance of the product described herein should be verified by testing and carried out by qualified experts.

For professional use only.

Last revised 4/18