



**GHOSTSHIELD®**

**CONCRETE  
SEALERS**

**& SPECIALTY COATINGS**



**ENGINEERED IN THE LAB. PROVEN IN THE FIELD.™**



## ENGINEERED IN THE LAB. PROVEN IN THE FIELD.™

Our mission was clear: to ignite inspiration and drive innovation. Drawing on a solid foundation of achievement, we embarked on a journey to redefine and completely transform the conventional perception of concrete sealer. By integrating cutting-edge technology, enhancing accessibility, maximizing performance, optimizing penetration, and elevating protection, we have not only revolutionized the industry but also established a superior approach to sealing and succeeding.

Engineered in the lab, Proven in the field - Ghostshield is now a leading global brand of innovative specialty concrete sealers, water and oil repellents, densifiers, durable coatings and structural waterproofing systems for the commercial and residential building sectors. At the core of our formulations lies the power of molecular nanotechnology. Our team has ingeniously crafted active ingredients with atomic structures reduced by a staggering 100x compared to traditional chemistries. Smaller particles means deeper penetration and deeper penetration means better protection.

With a rich history in underground waterproofing and a direct association with DeNeef Chemical (acquired by W.R Grace & Co. in 2011), our expertise spans across the globe. We have been intimately involved in prestigious projects such as the Big Dig, the Channel Tunnel, Bjarke Ingels Group's Grove at Grand Bay, Watchcase Condominiums in Sag Harbor (formerly the Bulova watch plant), Notre Dame, and the Zakim Bridge. Ghostshield's Iso-Tek™ 8501, renowned for its exceptional deep-penetrating capabilities, is widely recognized as the premier high-density vertical surface concrete sealer.

When architect Rafael Vinoly and Macklowe Properties embarked on the construction of 432 Park Ave, the tallest residential building in the western hemisphere, they knew that ordinary sealers would not suffice for penetrating the ultra-high-density reinforced concrete of this iconic superstructure. Following extensive mockups, numerous core samples, and a year of rigorous testing, engineers and material scientists from two esteemed firms unanimously concluded that Ghostshield® Iso-Tek™ 8501 achieved unprecedented levels of penetration. It successfully reached depths of over one inch into the ultra-high-density concrete, previously believed to be unattainable.

Through groundbreaking advancements like this and our unwavering commitment to ongoing innovation in concrete solutions, we consistently achieve extraordinary outcomes. Our focus will always be to provide products that penetrate deeper, extend the service-life of concrete structures, and deliver unrivaled performance.



# FULL LINE PRODUCT GUIDE

## INDUSTRIAL SEALERS

- 10 Iso-Tek™ 8501
- 12 Iso-Tek™ 8100
- 13 Iso-Tek™ 8540 VOC
- 14 Iso-Tek™ 8511
- 16 Iso-Tek™ 8555 CMU
- 17 Iso-Tek™ 8515
- 18 Siloxa-Tek® 8510

## SURFACE PREPARATION

- 24 Hydro-Etch™ 1000
- 25 Eco-Etch™ 1001
- 26 Micro-Degreaser™ 1100

## DENSIFIERS

- 28 Sila-Tek™ 3500
- 29 Lithi-Tek® 4500

## PENETRATING SEALERS

- 30 Lithi-Tek® 9500
- 31 Siloxa-Tek® 8500
- 32 Siloxa-Tek® 8505
- 33 Siloxa-Tek® 8510

## ACRYLIC COATINGS

- 36 Cryli-Tek® 5500
- 37 Cryli-Tek® 5505

## RESINOUS COATINGS

- 38 Oil-Stop Primer 300
- 39 Vapor-Tek™ 440
- 40 Epoxy Max™ 100
- 42 Armor-Tek™ 830
- 43 Polyaspartic 930
- 44 Max Wear Urethane™ 960

## CEMENTITIOUS OVERLAYS

- 46 Strong-Shield™ 365

## COUNTERTOP SEALERS

- 48 Countertop 660
- 49 Countertop 745
- 50 Countertop 770
- 51 Countertop 880

## STAINS & COLORS

- 52 Hydro-Stain™ 1500
- 53 Pro-Fusion™ 1505

## VEHICULAR DECK COATING

- 56 Strong-Flex™ Decking System

## CURE & SEAL

- 58 Iso-Cure™ 8520
- 59 Iso-Cure™ C309
- 60 Iso-Cure™ 8525

## SURFACE REPAIR

- 61 Poly-Strong™ PS80
- 62 Poly-Strong™ PS41
- 63 Poly-Strong™ PS55

## ADDITIONAL INFORMATION

- 66 Partnership Program
- 67 Applicator Program
- 68 Product Reference Guide
- 70 Product Comparison



# 100 YEAR WARRANTY

We back our penetrating sealers with an industry-leading 100 year warranty. For our building partners, it's a promise that we're equally vested in the structures they're building. For channel partners, that means carrying products that the manufacturer will stand behind. And for the homeowner, it's the peace of mind knowing we're protecting their investment.



# ANY SIZE, ANY JOB, ANYWHERE. DIRECT TO YOU.

Made for the toughest jobs, but accessible for even the smallest—and we make it all available with excellent customer service.



Water Street  
Tampa, FL  
Iso-Tek™ 8501



Customer Photo:  
Bryan C.  
Selinsgrove, PA  
Siloxa-Tek® 8500



# ISO-TEK™

Stand-out projects require stand-out materials. Iso-Tek™ is an industrial grade line of specialty commercial & industrial sealers engineered for architects & engineers who push the boundaries with demanding projects. Iso-Tek™ rises above the competition by providing innovative concrete solutions catered to projects that rise above the rest.

# A NEW GENERATION OF HYDROPHOBIC IMPREGNATION & CHLORIDE PROTECTION



Our Iso-Tek™ products are capable of penetrating high-density, architecturally reinforced concrete of superstructures beyond the norm - deeper than even the most notable competition. With Ghostshield® Iso-Tek™ protecting the concrete, the sky is the limit.

432 Park Ave  
New York City  
Iso-Tek™ 8501

Miami Int'l  
Airport  
Siloxa-Tek® 8500


Grove at  
Grand Bay  
Iso-Tek™ 8501

Dean B. Ellis  
Library, ASU  
Iso-Tek™ 8501


## NANOTECHNOLOGY

Developed over decades by research scientists and chemists, Ghostshield® formulas are the most innovative concrete sealers available on the market. Utilizing molecular nanotechnology, the active ingredients are engineered to have the smallest atomic structures possible. The active particle sizes are 0.3 to 1.5 nanometers in diameter, making them 100x smaller than traditional chemistries. The result is deeper penetration, longer service life and unrivaled performance.


Silicates  
(0.3 to 0.6 nm)



Silanes  
(0.4 to 1.5 nm)




Siloxanes  
(3 to 30 nm)



## SMALLER PARTICLES PENETRATE DEEPER

When it comes to penetrating concrete sealers, size matters. Ghostshield® formulas utilize the latest advances in nanotechnology and chemistry to penetrate deeper and last longer.

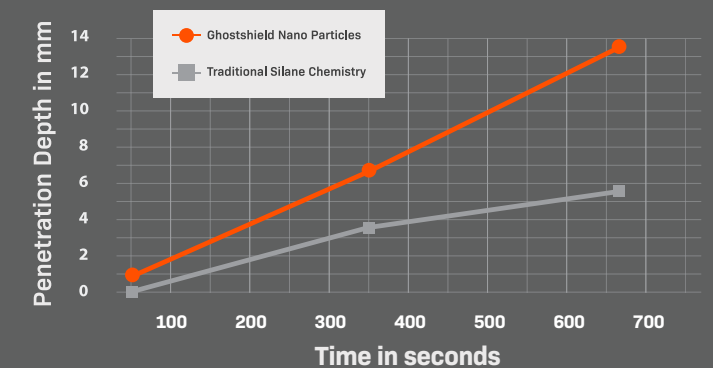



# ISO-TEK™ 8501

## LONGER CONTACT TIME ACTIVE CLING FOR VERTICAL

### DESCRIPTION:

The centerpiece of the Iso-Tek™ line is a proven concrete sealer capable of penetrating high-density, architecturally reinforced concrete superstructures up to 1" deeper than most notable competition. Iso-Tek™ 8501 is a revolutionary, solvent-less, gel-based, concrete sealer designed specifically for vertical (and overhead) surfaces without any material loss. The gel-like viscosity defies gravity, increases time of contact, and achieves penetration depths 10x deeper than regular liquid silanes. It dries clear, does not change (or darken) the concrete, and dramatically reduces moisture, chloride-ion ingress, sulfates, acidic gases, salts and water absorption.

### BENEFITS:

- // Exceptional Penetration on Vertical Surfaces
- // Dramatic Reduction in Water & Chloride-Ion Absorption
- // Protects Against Sulfates, Acidic Gases & Rust
- // Reduces Cracking & Surface Erosion
- // Solvent-less, Aqueous & Easy to Apply

### SPECIFICATIONS:

- COVERAGE**  
150-200 sq.ft. per gallon
- COATS**  
1
- VOC CONTENT**  
<80 g/L
- FINISH**  
Natural

### MEETS OR EXCEEDS:


- ASTM D-6532 // ASTM D-6490
- ASTM E-514 // ASTM C-672
- NCHRP Series II, Series IV
- Alberta DOT, Type 1b



ClearChem is a trademark of Berkeley Analytical.

### LONGER CONTACT TIME. HIGHER ABSORPTION. DEEPER PENETRATION.

The deeper silanes penetrate, the better protection they provide. The gel consistency of Iso-Tek™ 8501 allowed active silanes to remain on vertical surfaces longer to increase the degree of saturation. The temporary gel coating provides a shield against premature drying or "flash-off", giving the silanes more time to penetrate into the substrate. A single coat of Iso-Tek™ 8501 outperforms 4 coats of pure 100% liquid silane and will provide significantly better depth of penetration on vertical and overhead high density concrete.

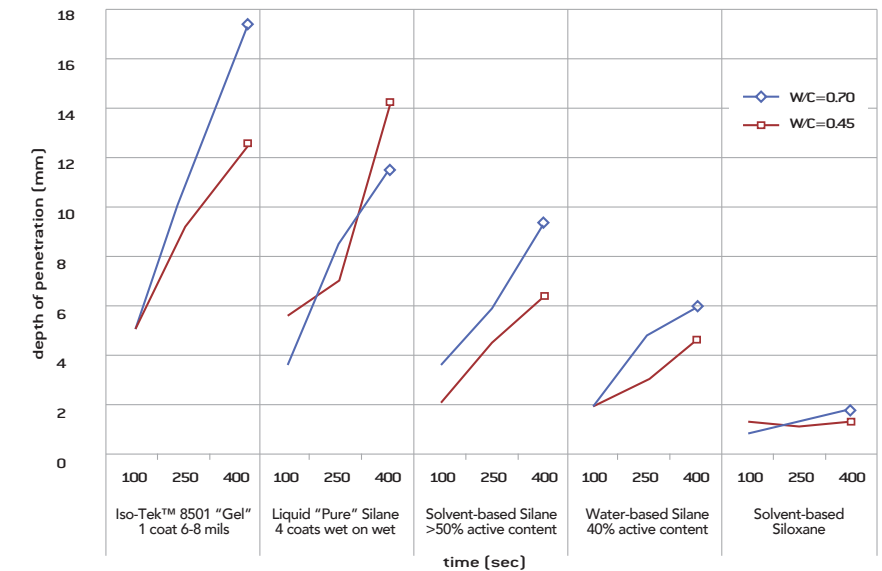


High viscosity formula leads to virtually zero material loss upon vertical / overhead application.

### THE NEXT GENERATION OF VERTICAL & OVERHEAD HYDROPHOBIC IMPREGNATION.

Iso-Tek™ 8501 is truly unique because of its gel consistency. As it begins to react with the substrate, it converts into a translucent polymeric resin. This reaction produces alcohol that further enhances absorption and drives material deeper into the substrate. Once dry, Iso-Tek™ 8501 allows concrete to breathe. Like traditional silanes, it will provide concrete protection without changing the look of the original surface.



Iso-Tek™ 8501 Gel applied to a 14,000 PSI vertical wall on 432 Park Ave, NYC.

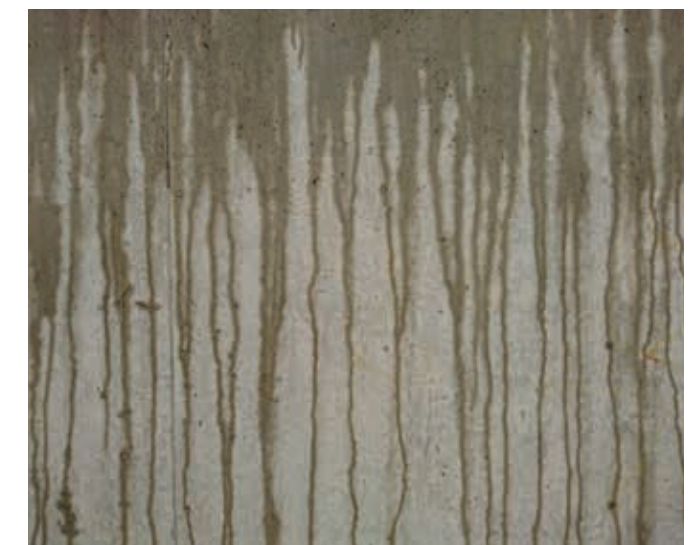

Traditional silanes on vertical surfaces are prone to excessive run-off. Excessive run-off leads to low penetration, significant material loss and poor performance.



# ISO-TEK™ 8100

## PURE PERFORMANCE 100% ACTIVE SILANE





### DESCRIPTION:

100% actives, breathable, deep penetrating, concrete sealer that provides exceptional penetrating power. It protects concrete, stone and masonry surfaces from water-soluble deleterious materials and freeze/thaw cycles. It dramatically reduces chloride ingress and stops the absorption of wind-driven rain. It reduces cracking, pitting, spalling and damage thereby lengthening substrate life expectancy and reducing maintenance costs. Utilizing advancements in nanotechnology, it delivers deeper penetration when compared to traditional silane isomers resulting in longer service life.

### BENEFITS:

- // Pure Silane / 100% Actives
- // Dramatic Reduction in Chloride & Water Absorption
- // Resists Moisture Intrusion & Oxidation
- // Resists Cracking & Surface Erosion
- // 100% Breathable

### SPECIFICATIONS:

-  **COVERAGE**  
100-400 sq.ft. per gallon
-  **COATS**  
2
-  **VOC CONTENT**  
350 g/L
-  **FINISH**  
Natural

### MEETS OR EXCEEDS:

AASHTO T-259 // ASTM E-303 // ASTM D-6532  
ASTM C-642 // ASTM D-6490 // ASTM E-514  
ASTM C-672 // NCHRP Series II, Series IV  
Alberta DOT, Type 1c



# ISO-TEK™ 8540 VOC

## DEEP PENETRATING 55% ACTIVE SILANE





### DESCRIPTION:

55% actives, solvent-based, VOC compliant penetrating water-repellent sealer that provides a long-lasting protective barrier against moisture and water intrusion, freeze-thaw cycles and chloride ingress. It reduces cracking, pitting, spalling and damage caused by wind-driven rain and environmental elements. It chemically reacts within the pores and capillaries of concrete to create a long-lasting hydrophobic surface that sheets water. Iso-Tek™ 8540 VOC can be used to enhance the performance of top coatings. It improves adhesion to inorganic substrates and works by blocking underlying moisture.

### BENEFITS:

- // Deep Penetrating Solvent Formula
- // Exceptional Waterproofing
- // Protects Against Chloride Ion Penetration
- // Resists Cracking & Surface Erosion
- // Improves Adhesions for Paints & Coatings

### SPECIFICATIONS:

-  **COVERAGE**  
100-400 sq.ft. per gallon
-  **COATS**  
2
-  **VOC CONTENT**  
<250 g/L
-  **FINISH**  
Natural

### MEETS OR EXCEEDS:

AASHTO T-259 // ASTM E-303 // ASTM D-6532  
ASTM C-642 // ASTM D-6490 // ASTM E-514  
ASTM C-672 // NCHRP Series II, Series IV  
Alberta DOT, Type 1b



# ISO-TEK™ **8511** **REBAR CORROSION DOESN'T STAND A CHANCE**

## DESCRIPTION:

This dual-action, penetrating silane is blended with amino alcohol technology to inhibit the electrochemical corrosion process between the steel (re-bar), chloride ions, oxygen and moisture within concrete. This chemical process dramatically reduces the rate of oxidation in contaminated concrete by forming a protective barrier on the surface of the reinforced steel. It reduces the rate of corrosion, inhibits rust and carbonization, while simultaneously protecting against the absorption of water-soluble deleterious materials.

## BENEFITS:

- // Reduces High & Low Corrosion Rates
- // Reduces Chloride-Ion-Induced Corrosion
- // Forms a Protection Passivating Coating
- // Inhibits the Onset & Rate of Rebar Corrosion
- // Exceptional Waterproofing

## SPECIFICATIONS:

**COVERAGE**  
100-400 sq.ft.  
per gallon

**COATS**  
2

**VOC CONTENT**  
<250 g/L

**FINISH**  
Natural

## MEETS OR EXCEEDS:

ASTM D-6532 // ASTM D-6490 // ASTM E-514  
ASTM C-672 // NCHRP Series II, Series IV  
Alberta DOT, Type 1b



432 Park Ave  
New York City  
Iso-Tek™ 8501



# ISO-TEK™ 8555 CMU WATER & CHLORIDE SHIELD FOR POROUS BLOCK




### DESCRIPTION:

A clear, penetrating, breathable water repellent designed specifically for use on exterior above-grade concrete and masonry units, porous block, cinderblock, split-face block or brick masonry. Provides resistance against water, alkali attack, cracking, staining and damage caused by wind-driven rain and environmental elements. Penetrates into the substrate and chemically bonds to provide permanent protection thereby lengthening life expectancy and reducing maintenance costs.

### BENEFITS:


- // Resists Absorption of Wind-Driven Rain
- // Dramatic Reduction in Chloride & Moisture Absorption
- // Reduces the Formation of Efflorescence
- // High Resistance to Alkali Attack
- // Protects Against Cracking & Surface Erosion
- // Resists Mold, Mildew & Efflorescence

### SPECIFICATIONS:

-  **COVERAGE**  
200-600 sq.ft.  
per gallon
-  **COATS**  
2
-  **VOC CONTENT**  
350 g/L
-  **FINISH**  
Natural

### MEETS OR EXCEEDS:

ASTM C-67 // ASTM C-642 // ASTM 1653  
ASTM 514 // ASTM C-140

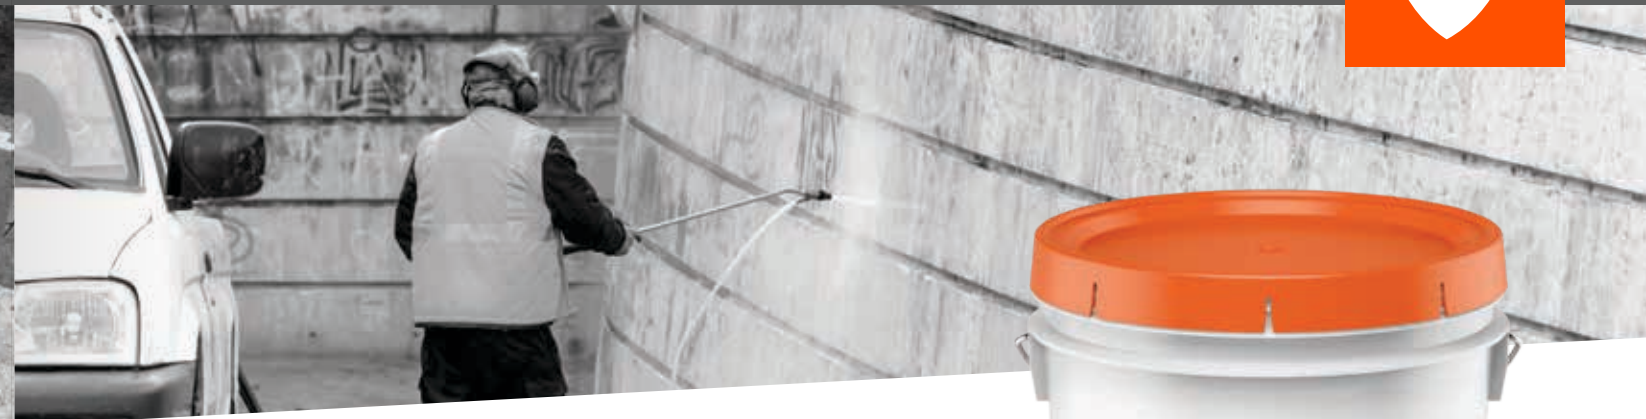

# ISO-TEK™ 8515 NON- SACRIFICIAL ANTI-GRAFFITI COATING

### DESCRIPTION:





A clear, breathable topical treatment that provides exceptional protection against a wide variety of graffiti materials. Protects concrete, brick, stone and masonry allowing for easy removal of spray paint, permanent marker, ink, bituminous paints, asphalt sealers and other solvent or waterborne paints. Packed with nanotechnology, it impregnates the surface where it chemically bonds to the substrate, providing non-sacrificial hydrophobic and oleophobic properties.

### BENEFITS:

- // Makes Graffiti Removal Easy
- // Clear, Invisible Finish
- // Chemically Bonds to Substrate
- // Non-Sacrificial Properties
- // 100% Breathable
- // No Blushing, Peeling or Yellowing



### SPECIFICATIONS:

-  **COVERAGE**  
125-250 sq.ft.  
per gallon
-  **COATS**  
2-3
-  **VOC CONTENT**  
<20 g/L
-  **FINISH**  
Natural

### MEETS OR EXCEEDS:

ASTM 6578 // ASTM G53 // ASTM D-6490  
ASTM C-642 // ASTM D-2047



**SILOXA-TEK®**  
**8510**  
**OIL & STAIN**  
**PROTECTION**  
**FLUOROCARBON**  
**TECHNOLOGY**

**DESCRIPTION:**





100%\* actives silane/siloxane, dual-action, deep penetrating, odorless, concrete sealer with unique oleophobic protection that penetrates deep into concrete, masonry, and natural stone. It chemically reacts and permanently bonds to reduce water, salt, and moisture intrusion and protects against water soluble deleterious materials, and freeze/thaw cycles. A proprietary fluorocarbon additive simultaneously repels oil and grease stains making concrete surfaces easier to clean.

**BENEFITS:**

- // Exceptional Waterproofing
- // Resists Stains from Oil & Grease
- // 100% Breathable
- // Protects Against Chloride-Ion Penetration
- // Resists Moisture Intrusion

\*Actives level can vary +/- 5%


**SPECIFICATIONS:**

- |   |  |
|---|--|
|  <b>COVERAGE</b><br>100-400 sq.ft.<br>per gallon |  <b>COATS</b><br>2        |
|  <b>VOC CONTENT</b><br><100 g/L                  |  <b>FINISH</b><br>Natural |

**MEETS OR EXCEEDS:**

- ASTM E-96 // ASTM E-514 // ASTM C-672  
 ASTM E-303 // ASTM C-642 // ASTM D-5590  
 ASTM D-6532 // ASTM D-6490 // ASTM G-154  
 AASHTO T-259 // NCHRP 244 II/IV // OHD L-34


**ENGINEERED  
 IN THE LAB.  
 PROVEN IN  
 THE FIELD.™**

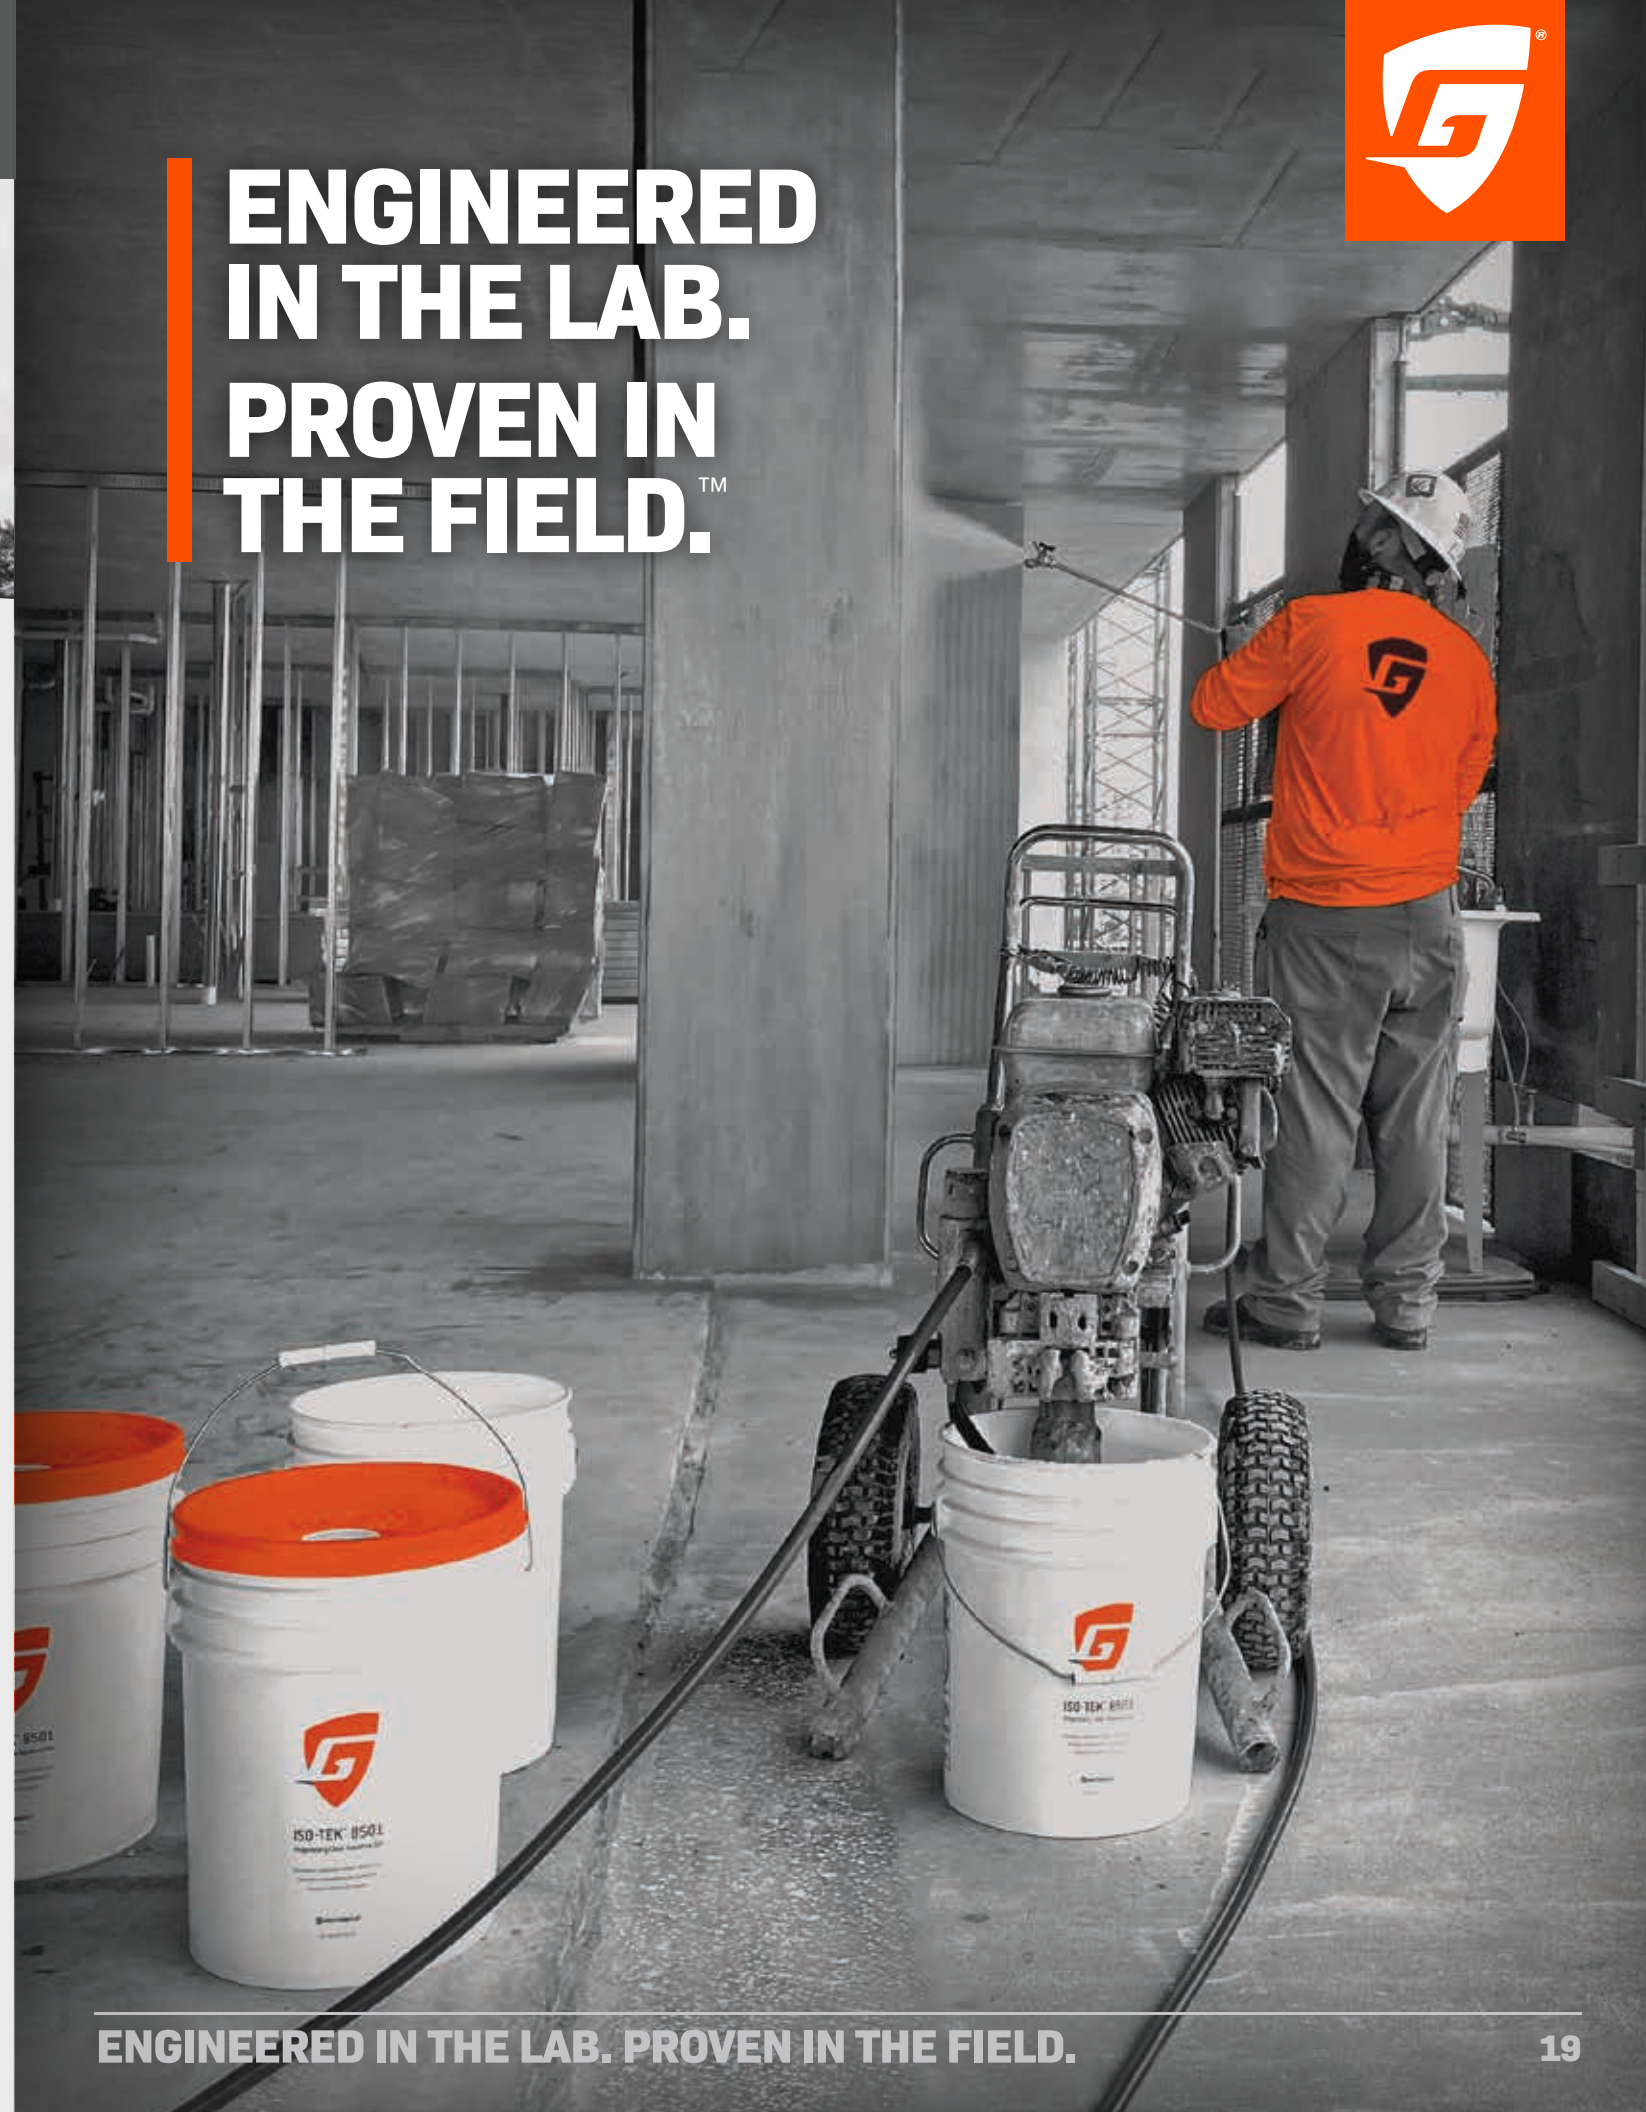



# REPUTATION IS EARNED

Trusted by architects and used on some of the most iconic structures worldwide, Ghostshield® products are designed by chemical engineers to last longer and perform better.

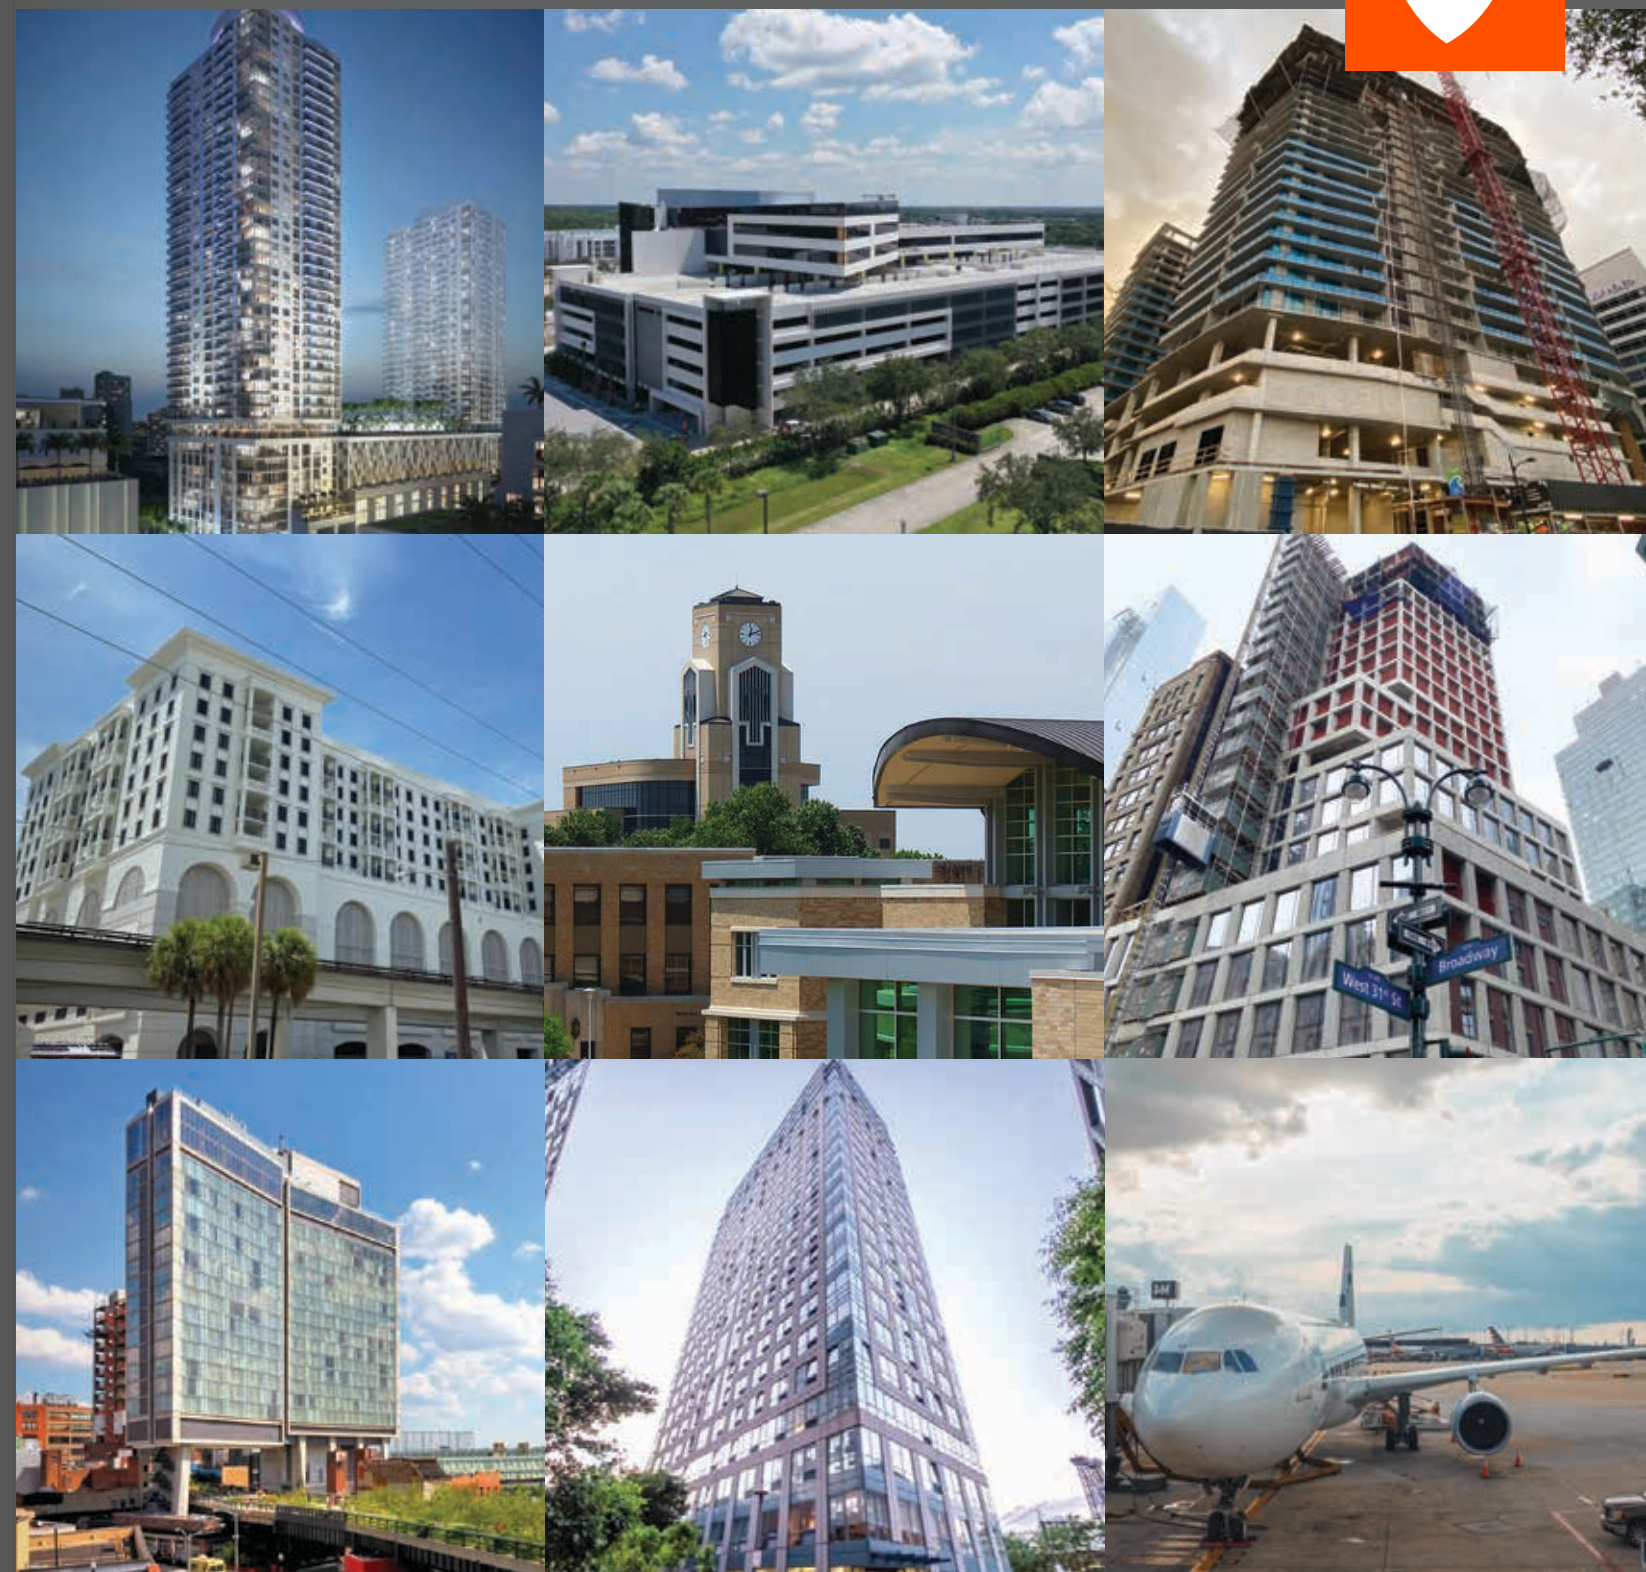

**Caobo Miami World Center**  
Iso-Tek™ 8540 VOC  
**Gables Station Miami**  
Iso-Tek™ 8540 VOC  
**Standard High Line Hotel**  
Iso-Tek™ 8501

**Arthrex, Inc. Headquarters**  
Siloxa-Tek® 8510  
**Arkansas State University**  
Iso-Tek™ 8501  
**Schaefer Landing, NY**  
Iso-Tek™ 8540 VOC

**Water Street - Block H**  
Iso-Tek™ 8501  
**1245 Broadway, NY**  
Iso-Tek™ 8501  
**Midway International Airport**  
Iso-Tek™ 8100



# PRO PRODUCTS

---

In establishing ourselves as a supplier of industrial and commercial-grade specialty chemicals, we have expanded even further to offer a unique Pro-Line. This specialty product line of penetrating sealers, acrylic coatings, densifiers, cleaners and etchers are packaged in smaller sizes, but give users the same dependable technologies you've come to expect from Ghostshield®.



## HYDRO-ETCH™ 1000

MODIFIED ACID BASED CLEANER

### DESCRIPTION:

A powerful 2-in-1 concrete cleaner and etcher, formulated with a unique blend of acids. It increases porosity without damaging the substrate and outperforms traditional hydrochloric or muriatic acids. Hydro-Etch™ 1000 allows coatings and sealers to penetrate deep, increasing the adhesion of coatings. Gets the job done as it easily brightens, etches, removes efflorescence, laitance, and excess concrete residue.

### BENEFITS:

- // Maximum Adhesion for Coatings, Paints and Sealers
- // Brightens and Cleans Concrete & Masonry
- // Removes Efflorescence and Residue
- // Concentrated - Flexible Options (1 gal makes 10 gals)
- // Helps Remove Excess Mortar From Bricks

### SURFACES:

Use on bare concrete, masonry, brick, and mortar. Perfect for garage floors, basements, driveways, carports, patios, walkways, pool decks and more.



### SPECIFICATIONS:



**COVERAGE**  
Up to 1,500 sq.ft.  
per bottle



**COATS**  
1



**VOC CONTENT**  
0 g/L



**CONCENTRATED**  
Makes up to ten  
(10) gallons


#### pH LEVEL




#### ENVIRONMENTAL IMPACT



#### ETCHING STRENGTH



#### TYPE OF PRODUCT



## ECO-ETCH™ 1001

NON-ACID BASED CLEANER

### DESCRIPTION:

A safe, powerful, 100% biodegradable cleaner and etcher that opens the pores of concrete to allow coatings to penetrate and achieve the proper bond. It creates a similar profile as muriatic acid, but without acid, harsh odors, or the need to neutralize the substrate after use. Simply rinse the surface with clean water, allow concrete to dry and apply coatings. It's that simple; Eco-Etch™ 1001 cleans, brightens and etches concrete without danger and provides the performance needed to get the results you need.

### BENEFITS:

- // Brightens and Cleans Concrete & Masonry
- // Removes Efflorescence and Residue
- // No Solvents, Zero VOC's, and Low Odor
- // Concentrated - Flexible Options (1 gal makes 3 gals)
- // Helps Remove Excess Mortar From Bricks

### SURFACES:

Use on concrete, masonry, brick, and mortar. Perfect for garage floors, basements, driveways, carports, patios, walkway, pool decks and more.



### SPECIFICATIONS:



**COVERAGE**  
Up to 750 sq.ft.  
per bottle



**COATS**  
1



**CONCENTRATED**  
Makes up to three  
(3) gallons



**VOC CONTENT**  
0 g/L

#### pH LEVEL



#### ENVIRONMENTAL IMPACT



#### ETCHING STRENGTH



#### TYPE OF PRODUCT





## MICRO-DEGREASER™ 1100

CLEANER & DEGREASER

### DESCRIPTION:


A safe, powerful, heavy-duty concrete cleaner and degreaser, specifically formulated to remove dirt, oil, transmission fluid, grime, and grease from concrete, brick or masonry. This ultra-safe solution is 100% biodegradable and will out-perform traditional all-purpose concrete detergents. It encapsulates tough-to-remove stains, washing them away, leaving concrete surfaces looking bright and new.

### BENEFITS:





- // Quickly Cleans & Degreases Concrete
- // Prepares Concrete for Stains
- // Promotes Adhesion of Paints, Coatings and Sealers
- // Concentrated - Dilutes down to General Purpose Cleaner
- // Safe Around Grass, Flowers, and Plants
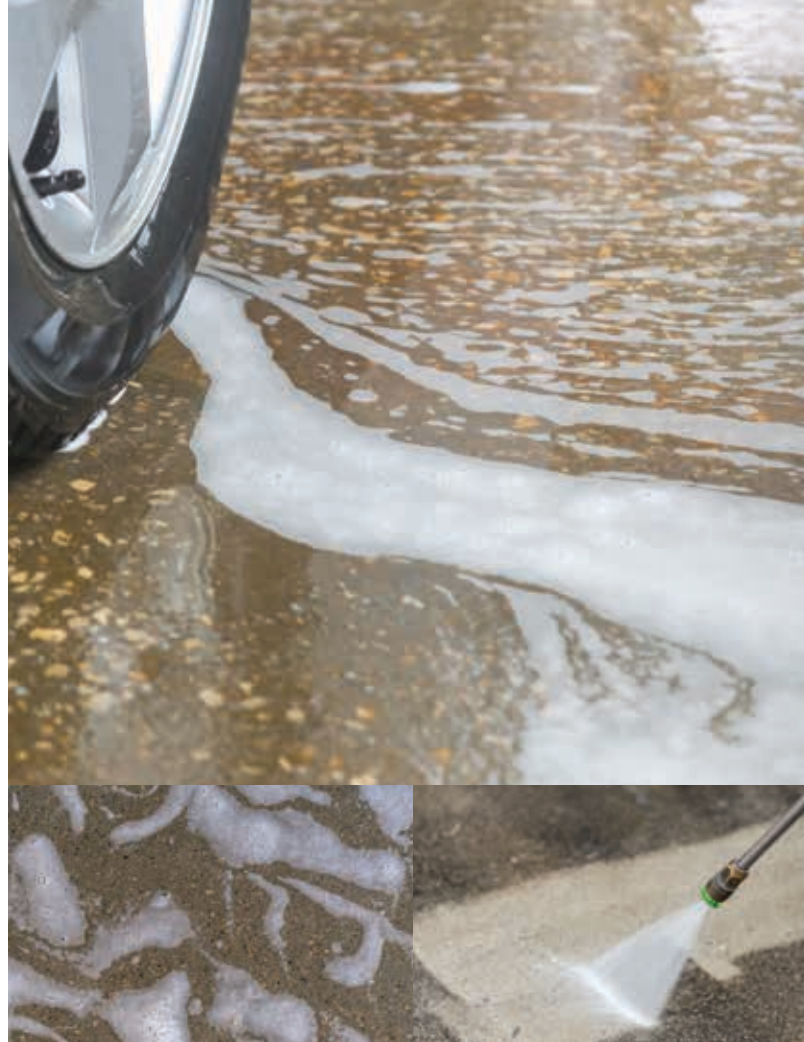
### SURFACES:

Concrete, basement floors, poured basement walls, driveways, patios, walkways, and garages.



### SPECIFICATIONS:

 <b>COVERAGE</b> Up to 750 sq.ft. per bottle	 <b>COATS</b> 1
 <b>VOC CONTENT</b> 0 g/L	 <b>CONCENTRATED</b> Makes up to eleven (11) gallons
<b>pH LEVEL</b> ACIDIC ● NEUTRAL ALKALINE	<b>ENVIRONMENTAL IMPACT</b> LOW ● MEDIUM HIGH
<b>ETCHING STRENGTH</b> ● NONE GOOD BEST	<b>TYPE OF PRODUCT</b> ● CLEANER HYBRID ETCHER





## SILA-TEK™ 3500

SODIUM-BASED DENSIFIER

### DESCRIPTION:

A concentrated sodium-based concrete densifier used as a stand alone product prior to polishing or as a cost effective primer. Sila-Tek™ 3500 hardens and strengthens concrete making it up to 45% stronger. It's the preferred choice for polishing and utilizes the latest advancements in nanotechnology to form insoluble crystalline structures deep within the pores of concrete. It reacts with cement, pozzolans, and most aggregates to fill microcracks, allow concrete to polish faster and reduce the absorption of water and moisture. Dries to a completely natural finish and does not crack, peel, or delaminate.

### BENEFITS:

- // Shortens Concrete Polishing Time
- // Hardens & Strengthens Concrete
- // Reduces Moisture Vapor
- // VOC Free / Solvent-Free
- // Concentrated (Makes 5 Gallons)


### SURFACES:

Concrete, basement floors, poured basement walls, driveways, patios, walkways, and garages.



### SPECIFICATIONS:

<b>COVERAGE</b> Up to 1000 sq.ft. per bottle	<b>COATS</b> 2	<b>CONCENTRATED</b> Makes (5) gallons
<b>VOC CONTENT</b> 0 g/L	<b>FINISH</b> Natural	<b>WARRANTY</b> 100 Years

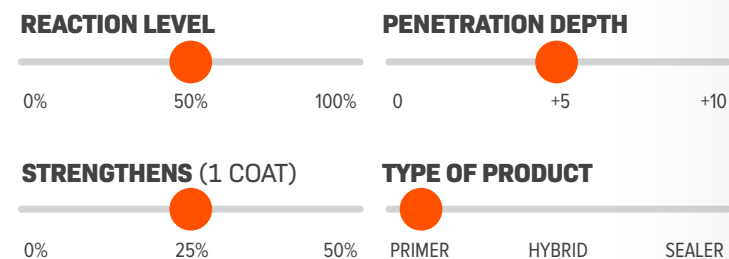

## LITHI-TEK® 4500

LITHIUM-BASED DENSIFIER

### DESCRIPTION:


A deep penetrating lithium-based concrete densifier used as a quick reacting polishing agent or as a one-coat high performing primer prior to sealing. Reacts with cement, pozzolans, and most aggregates to fill microcracks and reduce the porosity of the surface. Based on lithium silicate nanotechnology, it penetrates easier than competitive products and forms insoluble crystalline structures that reduce the absorption of water and moisture. Adds durability to concrete by reducing dusting and efflorescence while increasing abrasion and stain resistance. Dries natural and does not crack, peel, or delaminate.

### BENEFITS:

- // Hardens & Strengthens Concrete
- // Reduces Moisture Vapor
- // One Coat Performance / Deeper Penetration
- // Primes Concrete for Top Coat Sealers
- // Less Surface Blooming and Whitening
- // Concentrated (Makes 2 Gallons)


### SURFACES:

Concrete, basement floors, poured basement walls, driveways, patios, walkways, and garages.

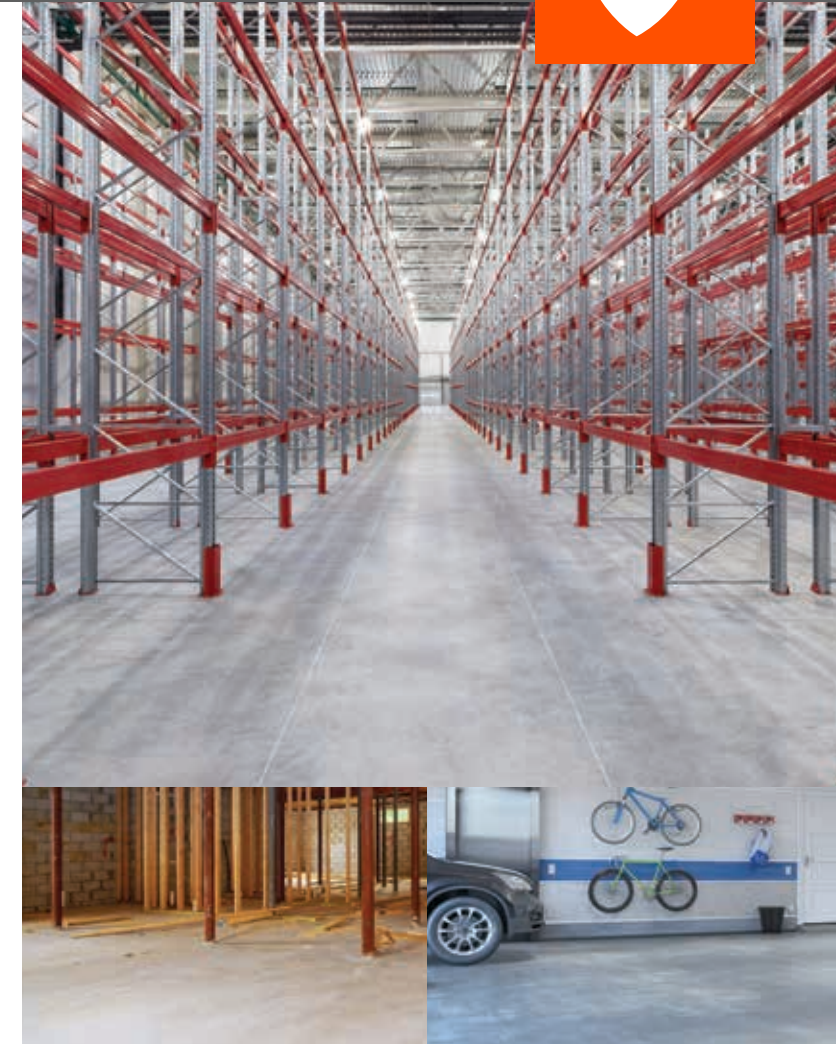

### SPECIFICATIONS:

<b>COVERAGE</b> Up to 500 sq.ft. per bottle	<b>COATS</b> 1	<b>CONCENTRATED</b> Makes (2) gallons
<b>VOC CONTENT</b> 0 g/L	<b>FINISH</b> Natural	<b>WARRANTY</b> 100 Years

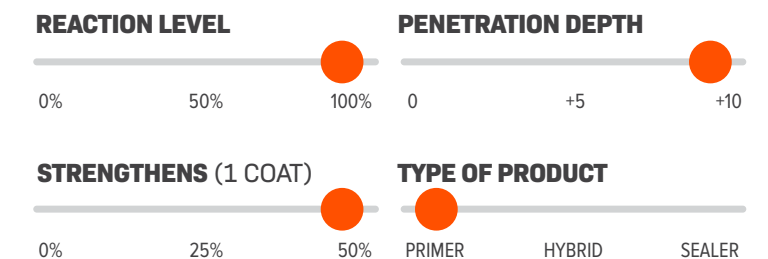



## LITHI-TEK® 9500

HYBRID SEALER & DENSIFIER

### DESCRIPTION:

A unique, industrial-grade, proprietary concrete sealer designed to densify, strengthen and waterproof concrete in one easy step. It penetrates pores in the concrete, strengthens it by up to 25%, reduces porosity and provides hydrophobicity. This unique blend of chemistry, shipped concentrated, provides long-lasting protection from moisture and abrasion. It's often considered to be one of the industry's most innovative product.

### BENEFITS:

- // Waterproofs & Strengthens Concrete
- // Locks Out Moisture
- // Resists Mold, Mildew & Efflorescence
- // Resists Cracking & Surface Erosion
- // Exceptional Water Beading

### SURFACES:


Concrete, basement floors, poured basement walls, driveways, patios, walkways, and garages.

Not ideal on below grade concrete. Not recommended for bricks, pavers, cinder-block or surfaces exposed to deicing salts.



### SPECIFICATIONS:

<b>COVERAGE</b> Up to 1000 sq.ft. per bottle	<b>COATS</b> 2	<b>CONCENTRATED</b> Makes (5) gallons
<b>VOC CONTENT</b> 0 g/L	<b>FINISH</b> Natural	<b>WARRANTY</b> 100 Years

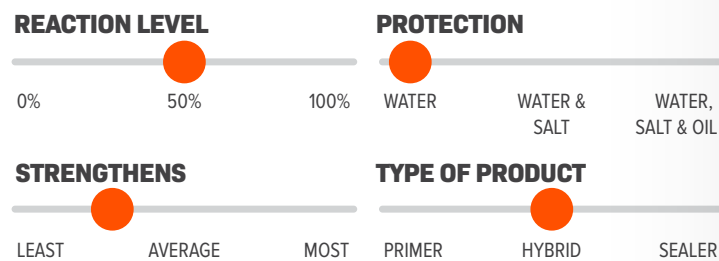

## SILOXA-TEK® 8500

WATER & SALT REPELLENT

### DESCRIPTION:

An industrial-grade, DOT approved, water-based, penetrating sealer made with a proprietary blend of DOT approved silane/siloxane. It not only resists deicing salts, chlorides, freeze-thaw damage, and ASR (alkali-silica reaction) but its hydrophobic nature resists moisture intrusion and vapor transmission. It dries completely clear with a natural finish and will not change the look or appearance of the substrate. This is the go-to choice to seal and protect any concrete, brick, or masonry based substrate.

### BENEFITS:

- // Water & Salt Repellent
- // Prevents Deicing Salt Damage
- // Resists Mold, Mildew & Efflorescence
- // Resists Cracking & Surface Erosion
- // Locks Out Moisture


### SURFACES:

Concrete, concrete blocks/cinder-blocks, brick, pavers, exposed aggregate, stucco, stone, slate and sandstone. Driveways, sidewalks, patios, pool decks, garages, chimneys, and roof tiles. Also used for plazas, food courts, parking garages and machine shops.



### SPECIFICATIONS:

<b>COVERAGE</b> Up to 400 sq.ft. per gallon	<b>COATS</b> 2	<b>CONCENTRATED</b> Ready to Use or Concentrated
<b>VOC CONTENT</b> 90 g/L	<b>FINISH</b> Natural	<b>WARRANTY</b> 100 Years

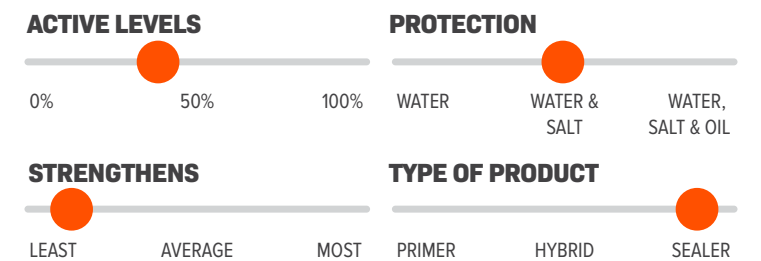



## SILOXA-TEK® 8505

WATER, SALT & OIL REPELLENT

### DESCRIPTION:

Our cutting-edge water-based concrete sealer utilizes the latest advancements in nanotechnology to deliver fluoro-free water, salt, and stain protection. This solvent-free, multi-polymer penetrating sealer was engineered to perfection and will provide unparalleled resistance to water and oil, but also acts as an organic stain repellent. Siloxa-Tek® 8505 penetrates deep to provide freeze/thaw protection and defend against water-soluble harmful substances like road salt and chlorides absorption which lead to cracks, pits, and spalls. The proprietary stain repellent additive makes clean-up easier than ever.

### BENEFITS:

- // Water, Salt and Oil Repellent
- // Makes Oil Stains Easier to Clean
- // Resists Mold, Mildew & Efflorescence
- // Resists Cracking & Surface Erosion
- // Locks Out Moisture


### SURFACES:

Concrete driveways, garages, pool decks, patios, brick, stone, stucco, slate, sandstone, & masonry. Also used on concrete blocks, CMU, cinderblocks, pavers, exposed aggregate, walkways, roof tiles, loading docks, bridge decks, parking garages, buildings and more.



### SPECIFICATIONS:

<b>COVERAGE</b> Up to 400 sq.ft. per gallon	<b>COATS</b> 2	<b>CONCENTRATED</b> Ready to Use or Concentrated
<b>VOC CONTENT</b> 0 g/L	<b>FINISH</b> Natural	<b>WARRANTY</b> 100 Years

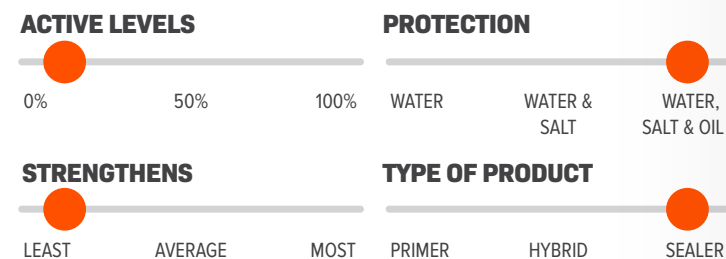

## SILOXA-TEK® 8510

WATER, SALT & OIL REPELLENT

### DESCRIPTION:

Our deepest penetrating, highest performing, longest lasting concrete sealer in the Siloxa-Tek® line. Comprised of 100%\* actives it is able to resist water intrusion, deicing salts, chlorides, freeze-thaw cycles and staining from oils and greases. This proprietary silane/siloxane concrete sealer contains a proprietary stain repellent additive and dries completely clear with a natural finish that will not change the look or appearance of the substrate.

### BENEFITS:

- // Water, Salt and Oil Repellent
- // Prevents Deicing Salt Damage
- // Resists Mold, Mildew & Efflorescence
- // Resists Cracking & Surface Erosion
- // Locks Out Moisture

### SURFACES:


Commercial, industrial, & retail concrete floors/slabs, stadiums, plazas, food courts, parking garages, shop floors, machine shops. Also used for concrete driveways, garages, pool decks, patios, brick, stone, stucco, slate, sandstone, & masonry.

\*Actives level can vary +/- 5%



### SPECIFICATIONS:

<b>COVERAGE</b> Up to 400 sq.ft. per gallon	<b>COATS</b> 2	<b>VOC CONTENT</b> 100 g/L
<b>FINISH</b> Natural	<b>WARRANTY</b> 100 Years	

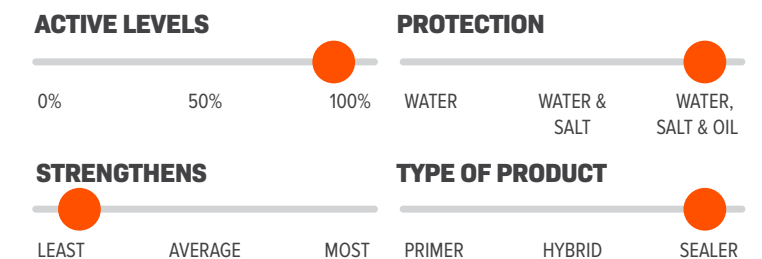



CUSTOMER PHOTO:

**BRYAN C.  
SELINGROVE, PA  
SILOXA-TEK® 8500**

Customer Photo:  
Bryan C.  
Selingsrove, PA  
Siloxa-Tek® 8500



**IMPROVED FORMULA**



## CRYLI-TEK® 5500

LOW GLOSS DECORATIVE COATING

### DESCRIPTION:

An industrial grade, water-based, breathable, acrylic that enhances, protects, and provides industry-leading performance and protection. This proprietary formula gives surfaces an ultra clear, low gloss, non-yellowing, protective finish. Seals, protects and creates a dust-proof surface that highlights the natural pigments of the concrete while delivering unsurpassed stain resistance. The end result is years of protection and a low gloss / satin finish that resists chipping, flaking, delamination and the breakdown caused by UV light exposure.

### BENEFITS:

- // Dries Clear with a Low Gloss / Satin Finish
- // Reduces Water Absorption
- // Resists Mold, Mildew & Surface Staining
- // UV Resistant / Non-yellowing
- // Extends the Color Life of Concrete Stains


### SURFACES:

Concrete, stamped concrete, colored concrete, pavers, exposed aggregate and decorative stone. Perfect on exterior and interior concrete or masonry surfaces including patios, pool decks, driveways and walkways.



### SPECIFICATIONS:

<b>COVERAGE</b> Up to 250 sq.ft. per gallon	<b>COATS</b> 1	<b>FINISH</b> Low Gloss
<b>VOC CONTENT</b> <100 g/L		

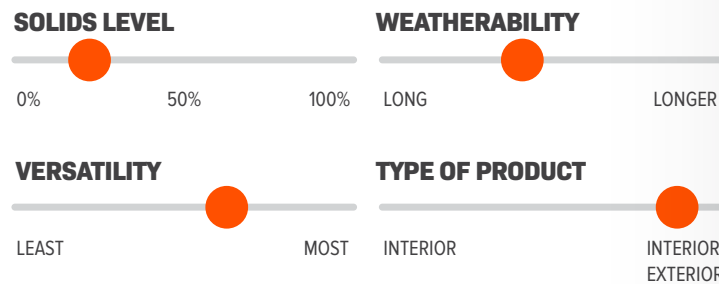

**IMPROVED FORMULA**



## CRYLI-TEK® 5505

WET LOOK DECORATIVE COATING

### DESCRIPTION:

This durable, solvent-based, decorative concrete and paver coating provides industry leading one-coat performance and protection. It leaves concrete surfaces with a clear, high-gloss, wet-look finish and enhances the color of concrete without yellowing. It has an extremely fast set time and is known for its versatility, durability, and ease of application. Protects as it beautifies, Cryli-Tek® 5505 will resist chipping, flaking, delamination and breakdown caused by UV light. Passes ASTM C309 and will provide superior cure & seal capabilities on freshly poured concrete.

### BENEFITS:

- // Dries Clear with a Wet Look Finish
- // Reduces Dusting & Surface Deterioration
- // Reduces Water Absorption
- // Resists Mold, Mildew & Surface Staining
- // UV Resistant / Non-yellowing
- // Extends the Color Life of Concrete Stain
- // Cure & Seal Option (Passes ASTM C309)


### SURFACES:

Concrete, stamped concrete, colored concrete, pavers, exposed aggregate and decorative stone. Perfect on exterior and interior concrete or masonry surfaces including patios, pool decks, driveways and walkways.



### SPECIFICATIONS:

<b>COVERAGE</b> Up to 250 sq.ft. per gallon	<b>COATS</b> 1	<b>FINISH</b> High Gloss
<b>VOC CONTENT</b> <400 g/L		

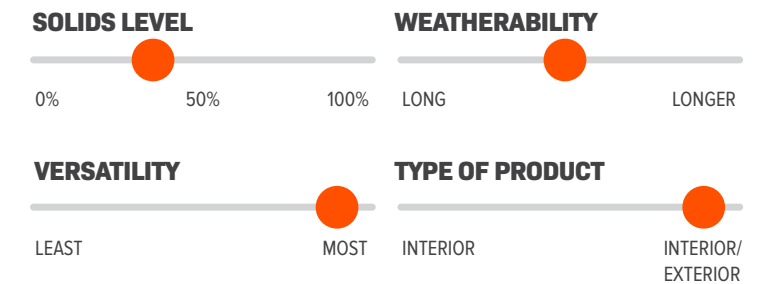



## OIL-STOP PRIMER 300

HIGH PERFORMANCE COATING

### DESCRIPTION:


Oil-Stop Primer 300 is a two component, solvent-based primer that has superb adhesion to well prepared oily and greasy substrates. It is uniquely formulated to prevent oil and chemicals from rising to the surface thereby greatly reducing the delamination of top coat finishes. It provides an effective membrane against residual oil contamination in concrete and has excellent substrate penetration. It is easy to apply and ensures oil will not affect a top coat finishes like an epoxy and urethane system.

### BENEFITS:

- // Blocks Oils & Chemicals in Compromised Substrates
- // Ensures Long-Lasting Top Coat Finishes
- // High Penetration & Improved Adhesion
- // Increases Durability of Top Coat Finishes
- // Easy to Apply

### SURFACES:

Garages, shop floors, warehouses, industrial floors, and concrete surfaces previously contaminated with oil & grease.

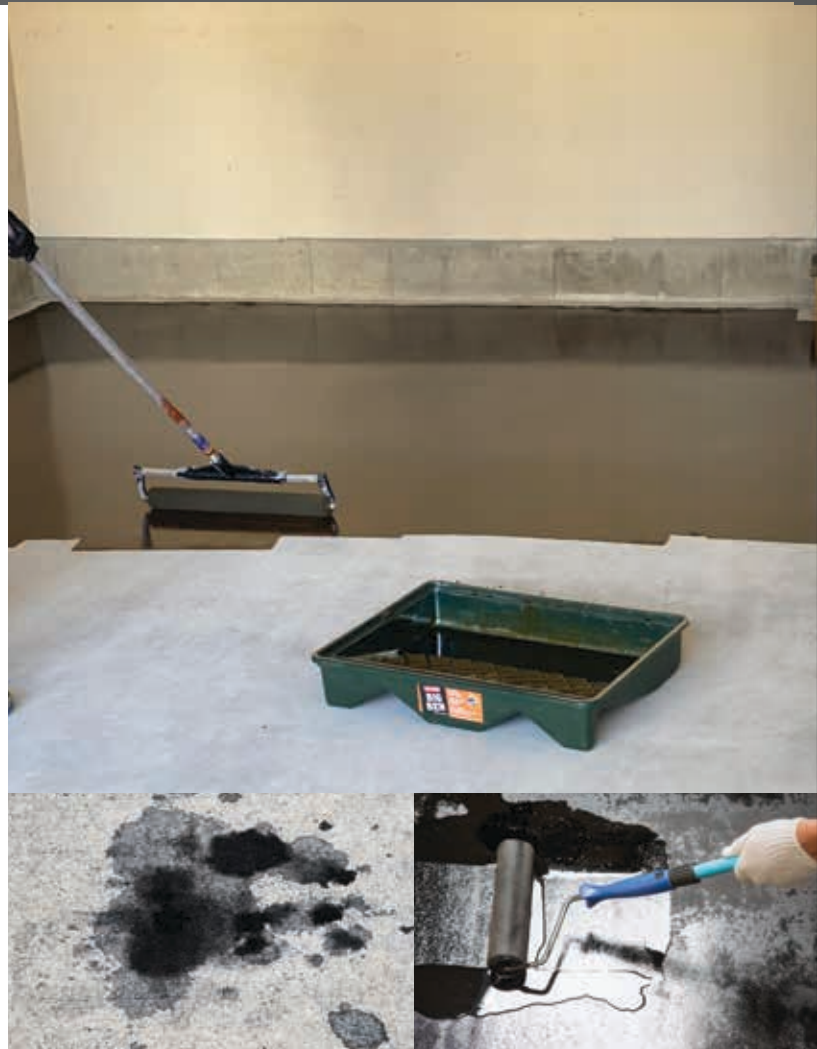

### SPECIFICATIONS:



**COVERAGE**  
Up to 300 sq.ft.  
per gallon



**COATS**  
1



**FINISH**  
Black



**VOC CONTENT**  
330 g/L



## VAPOR-TEK™ 440

MOISTURE VAPOR BARRIER (MVB)

### DESCRIPTION:


A revolutionary, 100% solids, two-component epoxy coating designed to control moisture vapor emission rates up to 20lb/24hr/ 1000 ft. It reduces the permeance of moisture vapor through concrete substrates to levels that are acceptable for the application of epoxy floor systems, vinyl, rubber, tile, cementitious overlays, terrazzo, wood, or carpet. The high performance and quick installation features of this system make it an ideal solution. Meets ASTM F3010 for vapor permeance.

### BENEFITS:

- // Reduces Vapor Moisture Transmission
- // Stops Dusting
- // May Be Used As A Primer
- // Excellent Adhesion To Concrete
- // Meets ASTM F3010

### SURFACES:

Concrete, garages, shop floors, warehouses, basements, kennels, commercial kitchens.

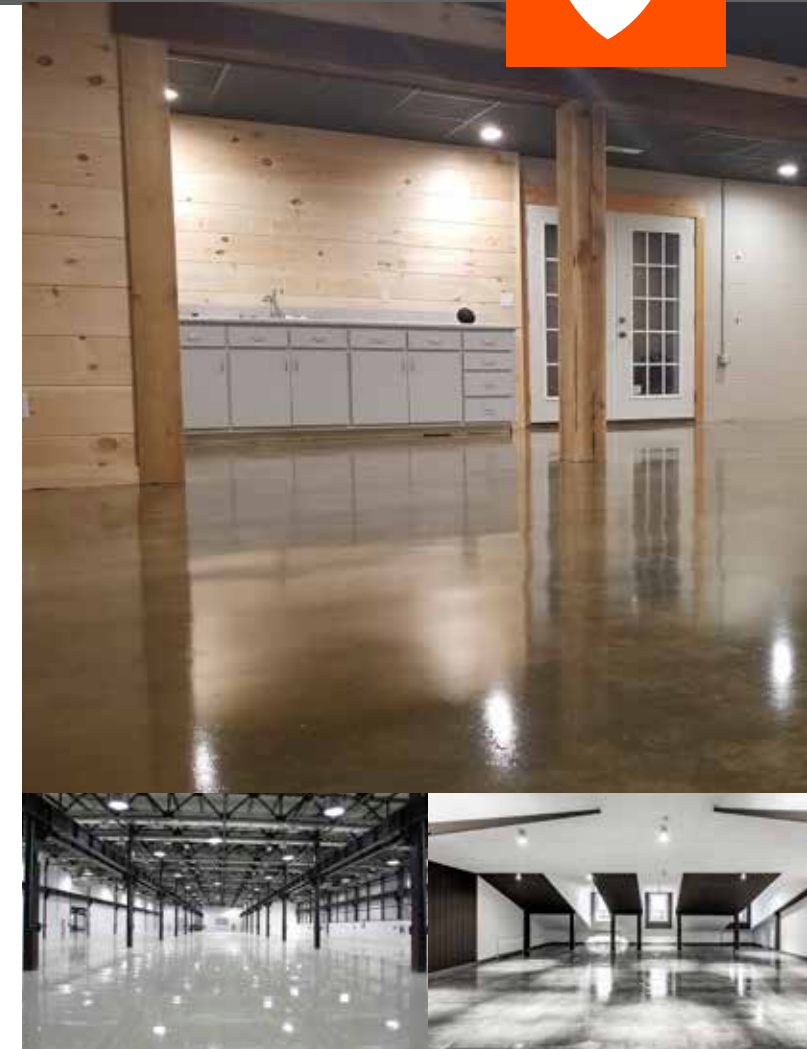

### SPECIFICATIONS:



**COVERAGE**  
Up to 100 sq.ft.  
per gallon



**COATS**  
1



**FINISH**  
High Gloss



**VOC CONTENT**  
<0 g/L



## EPOXY MAX™ 100

100% SOLIDS BASE COAT

### DESCRIPTION:

Two-component, 100% solids, self-leveling epoxy designed to coat concrete floors with high and low build capabilities. Has excellent impact and chemical resistance. Combines the highest quality epoxy resins and is the perfect base coat for any clear, solid color, flake and/or metallic epoxy floor system.


### BENEFITS:

- // Self Leveling & Seamless
- // Excellent Chemical Resistance
- // Easy to Apply
- // Low VOC
- // 100% Solids For Smoother Application

### SURFACES:

Concrete, garages, shop floors, warehouses, kennels, commercial kitchens. Not recommended for exterior surfaces.

### AVAILABLE COLORS:

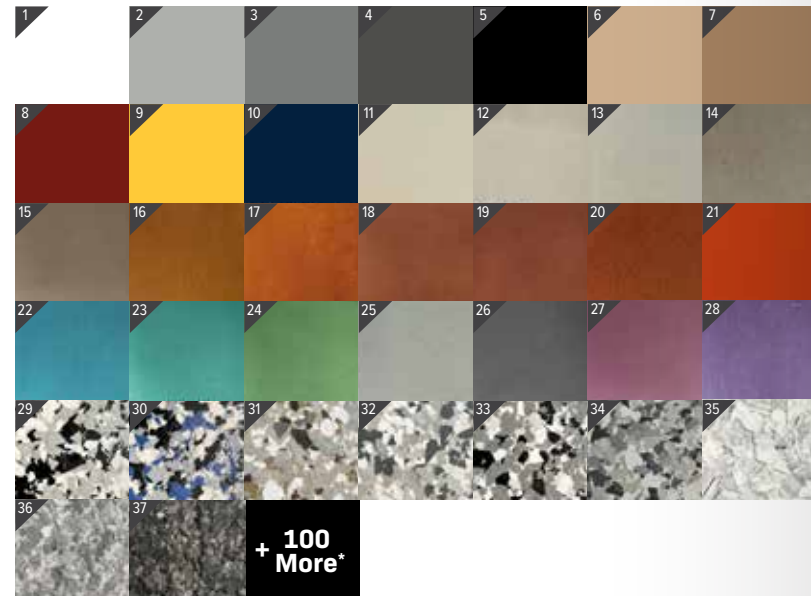

### SPECIFICATIONS:



**COVERAGE**  
50-150 sq.ft.  
per gallon



**COATS**  
1



**FINISH**  
High Gloss



**VOC CONTENT**  
<30 g/L

**Color Reference:**  
1. White 2. Silver 3. Light Grey 4. Medium Grey 5. Black 6. Almond 7. Beige 8. Terracotta 9. Yellow 10. Deep Blue  
11. Pearl White 12. Ice 13. Glitter White 14. Hot Chocolate 15. Mocha 16. Antique Gold 17. Gold 18. Copper 19. Bronze  
20. Bronze Glitter 21. Blue Mist 22. Aqua 23. Olive Green 24. Metallic Silver 25. Charcoal 26. Ruby 27. Violet Passion  
28. Metallic Orange 29. Domino 30. Orbit 31. Creekbed 32. Gravel 33. Wombat 34. Nightfall 35. Schist 36. Basalt 37. Carbon

\*Contact a Ghostshield Representative to request a complete color chart.





## ARMOR-TEK™ 830

POLYSILOXANE TOP COAT

### DESCRIPTION:

A high performance, two component, high solids, isocyanate-free, epoxy polysiloxane floor coating that provides superior resistance against abrasion, chemicals, corrosion, UV exposure and weathering. Armor-Tek™ 830 provides the benefits of a high performance epoxy and polyurethane in one coating.

### BENEFITS:



- // Creates a Stronger Chemical Bond
- // High Resistance Against Chemicals & Abrasion
- // Enhances Surfaces with a Deep Color High Gloss Finish
- // Excellent Acid & Corrosion Resistance
- // Ensuring an Extended Surface Life
- // Isocyanate Free Formula

### SURFACES:

Concrete, garages, shop floors, warehouses, kennels, commercial kitchens. Recommended top coat for metallic floors.



### SPECIFICATIONS:

 <b>COVERAGE</b> 300-500 sq.ft. per gallon	 <b>COATS</b> 1	 <b>VOC CONTENT</b> <100g/L
 <b>FINISH</b> High Gloss, Satin		



## POLYASPARTIC 930

RAPID CURING TOP COAT

### DESCRIPTION:


This long setting/fast cure polyaspartic is a two component coating designed to protect concrete floors, epoxies, metallics, and flakes by providing incredible UV protection, abrasion, and chemical resistance. Recommended for areas with high risk of exposure to chemical spills, fuel, and heavy equipment. Rapid cure is ideal for commercial floors that require minimal downtime.

### BENEFITS:





- // Ensures Extended Color Retention
- // Keeps a Hygienic, Cleanable Surface
- // Ultraviolet and Moisture Stable
- // Fast Curing - Extended Set Time
- // Exceptional Durability
- // Excellent Hardness
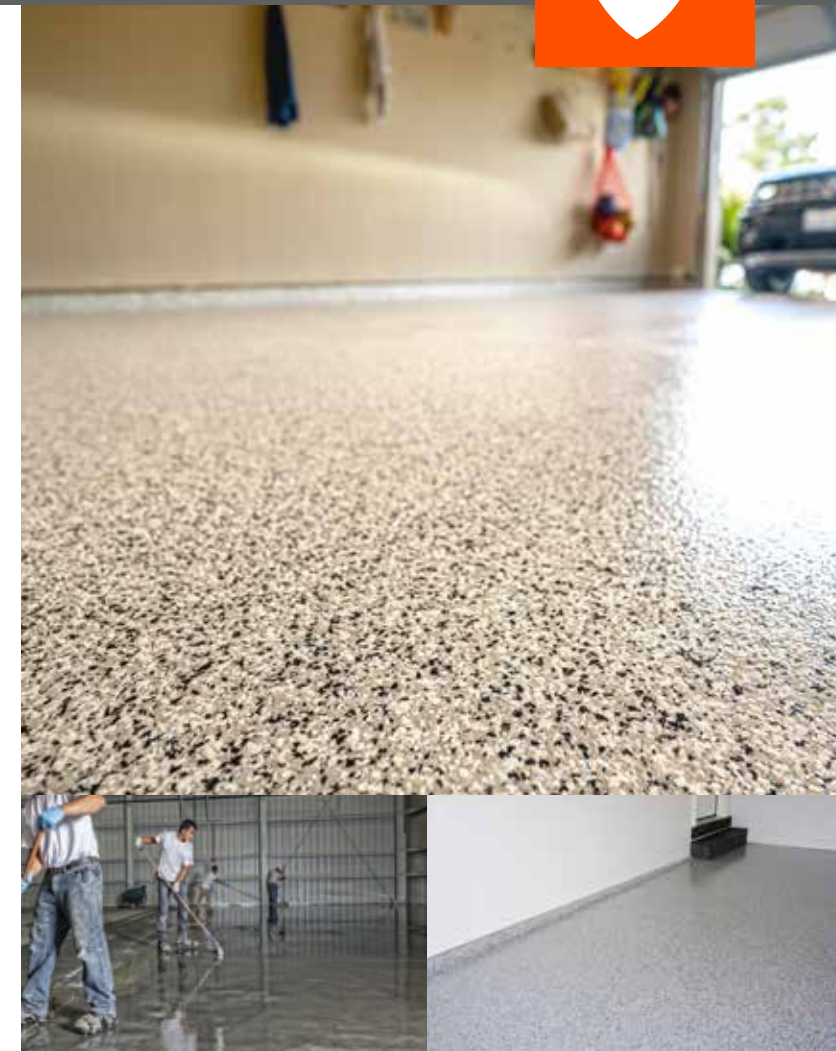
### SURFACES:

Concrete, garages, shop floors, warehouses, kennels, commercial kitchens. Recommended top coat for flake floor system.



### SPECIFICATIONS:

 <b>COVERAGE</b> 150-200 sq.ft. per gallon	 <b>COATS</b> 1	 <b>VOC CONTENT</b> <245 g/L
 <b>FINISH</b> High Gloss		



## MAX WEAR URETHANE™ 960

HIGH SOLIDS TOP COAT

### DESCRIPTION:


A high solids, three-component urethane coating designed to protect concrete floors. It provides outstanding UV stability and incredible abrasion resistance while remaining durable and flexible. Recommended for indoor floors with high risks of exposure to chemical spills, fuel, heavy equipment, and extreme temperatures. Max Wear Urethane™ 960 topcoat has a satin finish and features a lightweight texture that provides consistent and dependable anti-slip properties.

### BENEFITS:





- // Abrasion Resistant & Scratch Resistant
- // 96% Solids For Long Lasting Protection
- // Protects Against Chemical Spills
- // Scratch Resistant
- // UV stable

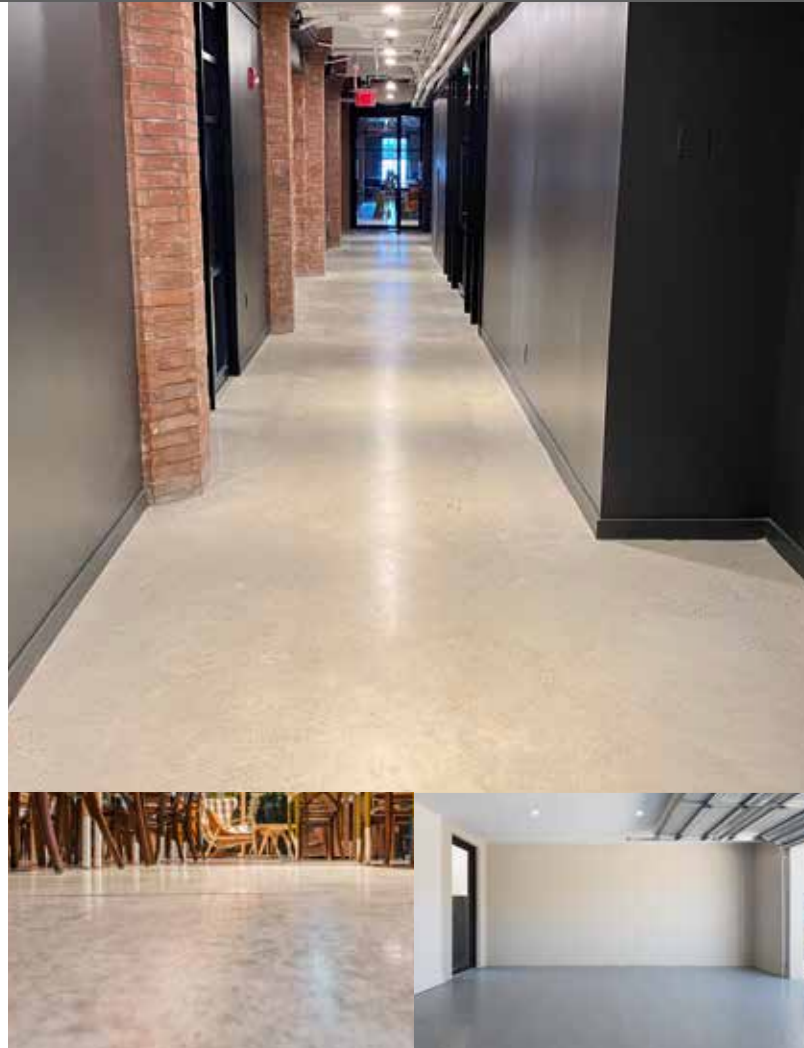
### SURFACES:

Concrete, garages, shop floors, warehouses, kennels, commercial kitchens. Recommended for solid floor systems.



### SPECIFICATIONS:

-  **COVERAGE**  
500-800 sq.ft. per gallon
-  **COATS**  
1
-  **VOC CONTENT**  
95 g/L
-  **FINISH**  
Satin

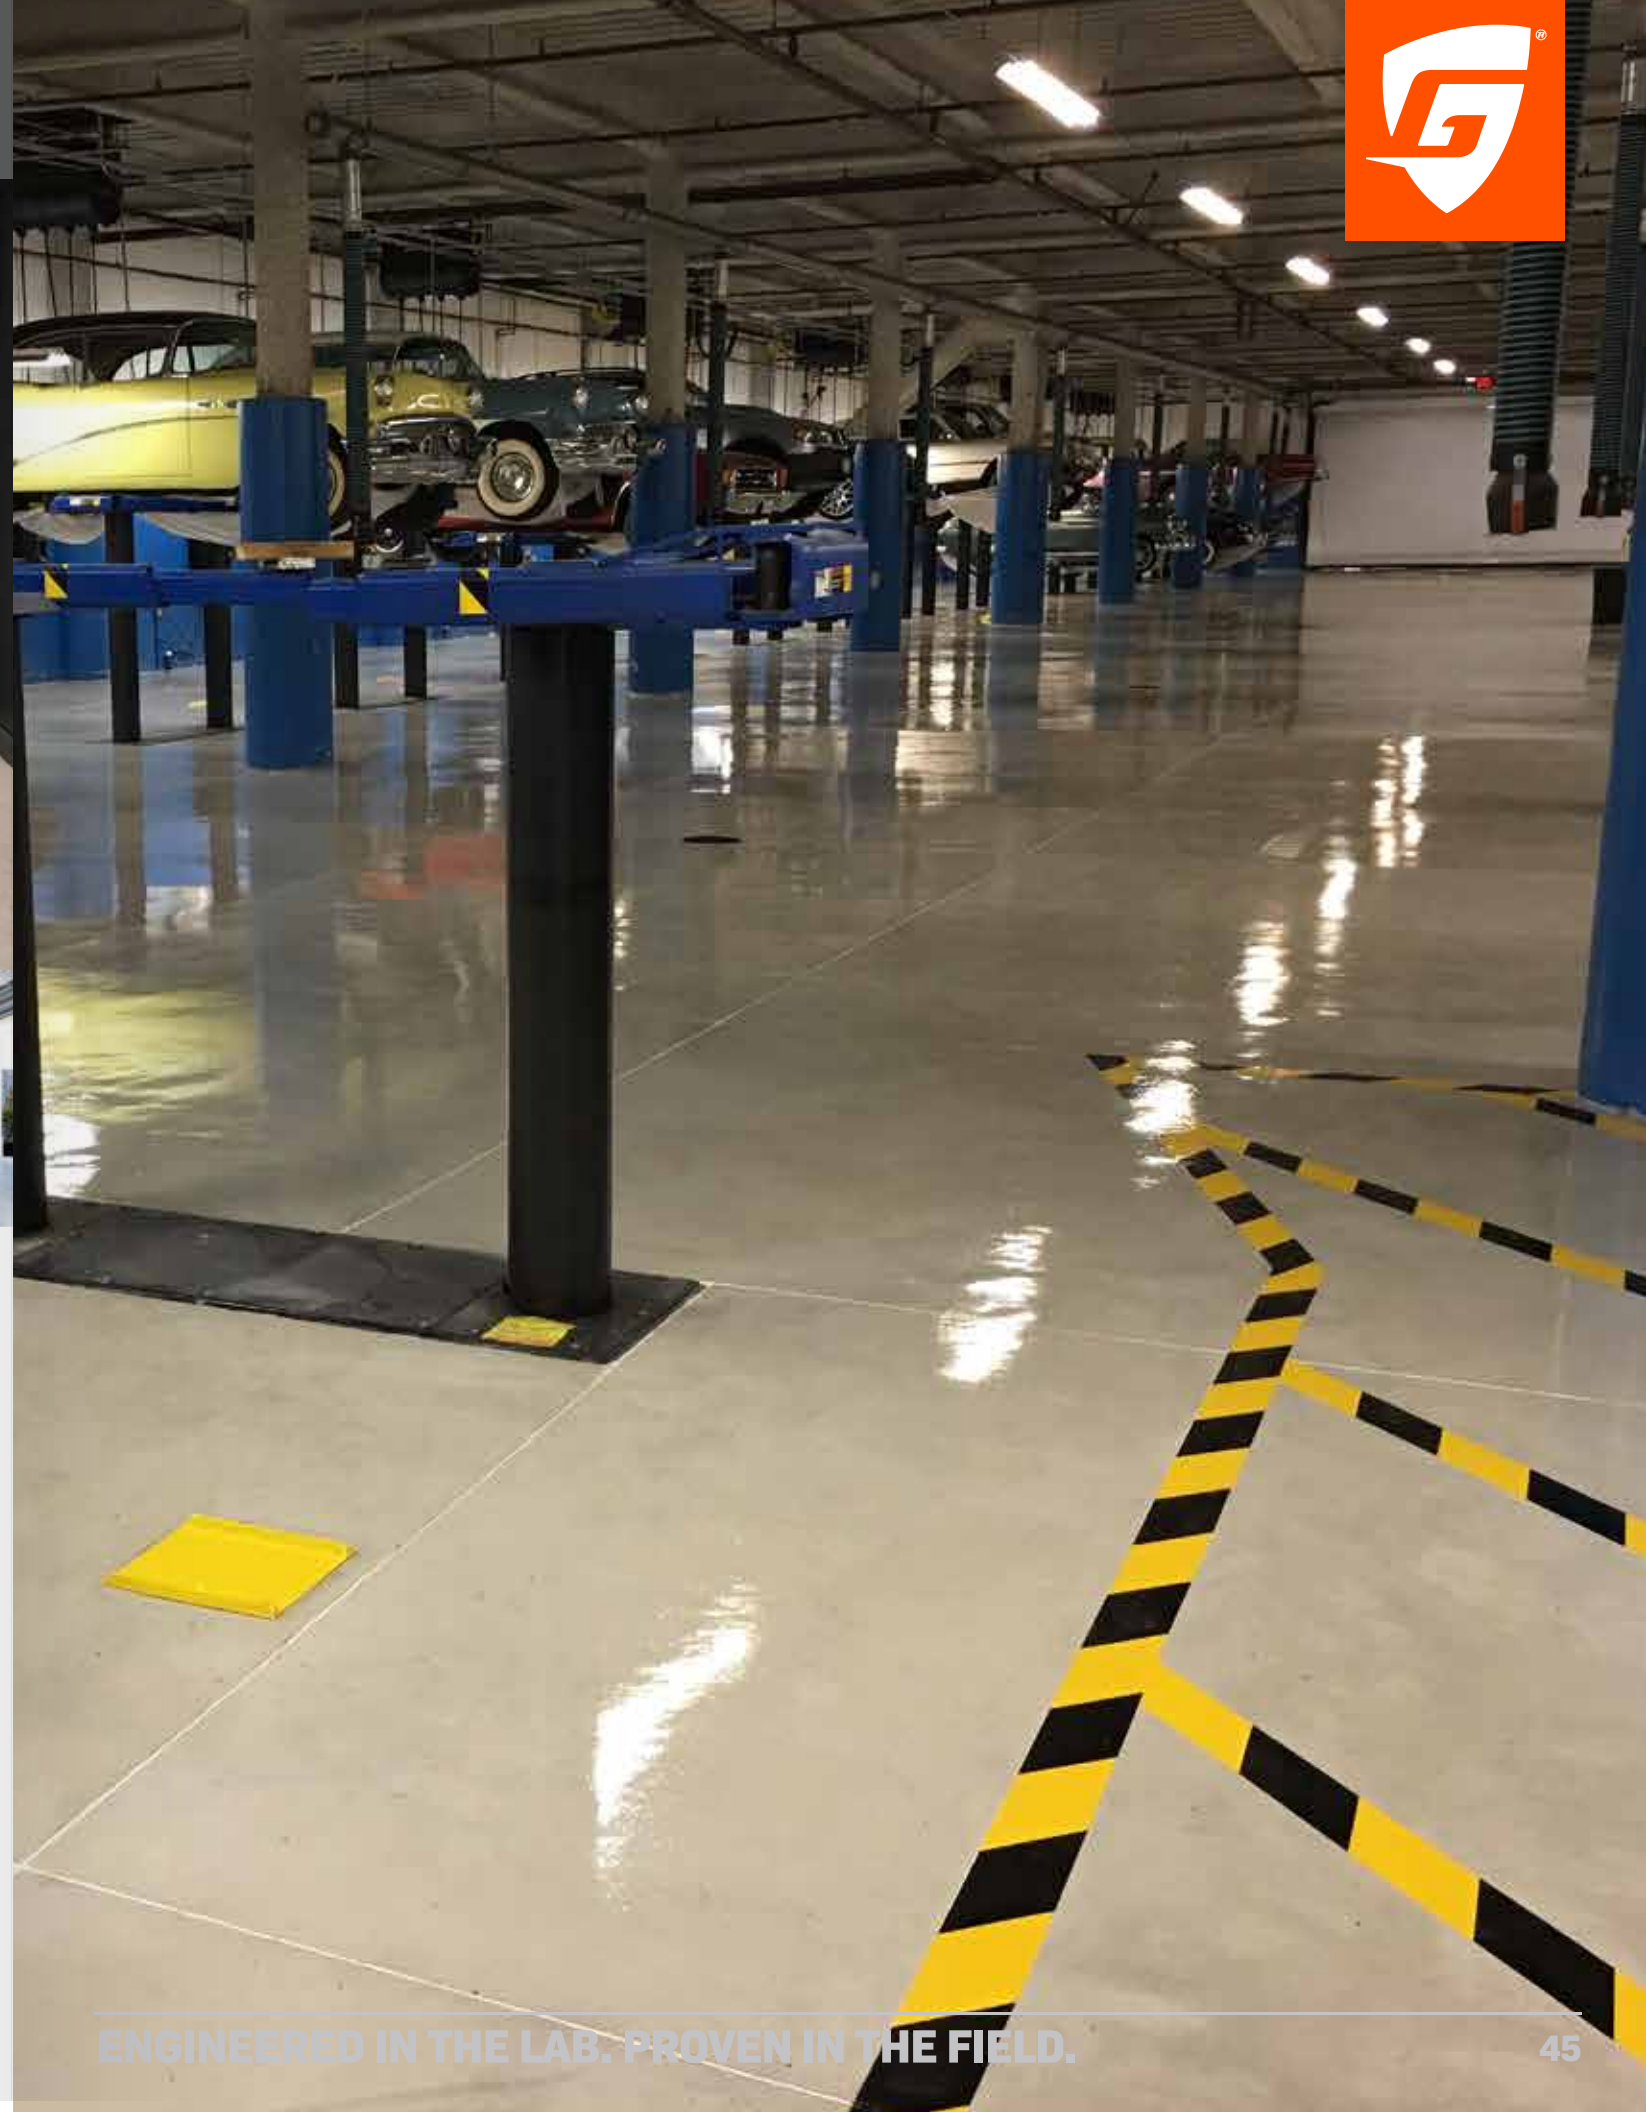



## STRONG-SHIELD™ 365

HIGH TRAFFIC CEMENTITIOUS OVERLAY

### DESCRIPTION:

This 6000 PSI, high-strength, single component, thin cementitious overlay designed to resurface high-traffic concrete surfaces without compromising color, design, or texture. A proprietary, self-bonding, cementitious overlay, it will transform old, spalled, or worn concrete by eliminating surface defects and increasing wearability. Great for renovating broomed concrete surfaces, but flexible enough to create a variety of textures.

### BENEFITS:


- // High Compressive Strength
- // Increases COF (Coefficient of Friction)
- // Improves Aesthetics
- // Protects Surfaces / Prevents Deterioration

### SURFACES:

Parking lots, parking garages, ramps, stairwells, and walkways where heavy foot or vehicular traffic is present. Perfect for theme parks, educational, medical, warehousing, multi-family, and manufacturing facilities.

**Color Reference:**  
1. Aged White 2. Off White 3. Cream 4. Salmon 5. Burnt Orange 6. Brick 7. Dark Almond 8. Limestone 9. Pewter 10. Mint 11. Blue Gray 12. Desert Red 13. Cardinal 14. Bronze 15. Ivory 16. Almond 17. Green Slate 18. Olive 19. Chocolate 20. Brown 21. Dark Chocolate 22. Sand 23. Light Gray 24. Tan 25. Taupe 26. Sky Blue 27. Stone Gray 28. Silver 29. Gray 30. Charcoal

### AVAILABLE COLORS:

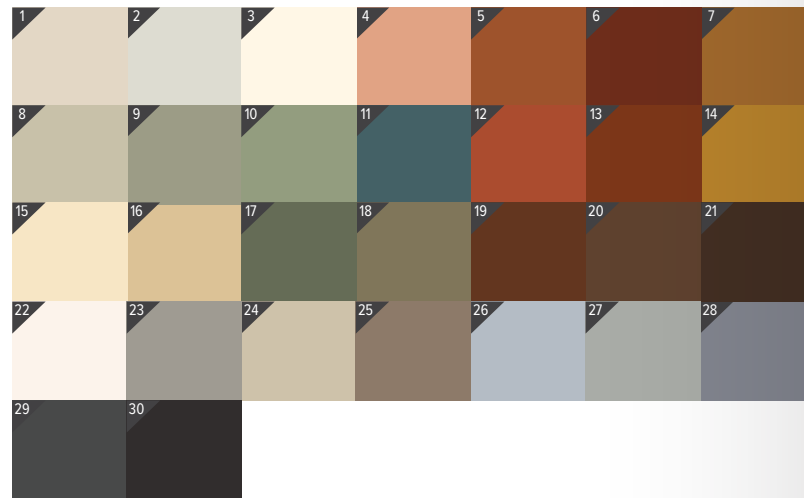

### SPECIFICATIONS:



**COVERAGE**  
50lb bag  
Base Coat = 100 to 180 sq. ft.  
Finish Coat = 150 to 250 sq. ft.



**CURE TIME**  
Initial Set: 90 min.  
Foot Traffic: 6-10 hours  
Full Cure: 28 days



**TENSILE STRENGTH**  
910 PSI



**FLEXURAL STRENGTH**  
1,575 PSI



**SHEAR BOND**  
1,695 PSI





## COUNTERTOP 660

LOW SHEEN COUNTERTOP SEALER

### DESCRIPTION:

Seals concrete countertops and protects without sacrificing their warm luster and beauty. Countertop 660 is a water-based, food-safe, VOC free, concrete sealer that both penetrates the substrate and creates a thin, hard shell that acts as a barrier against staining, chipping, scratching, and the wear of everyday use. Resists UV degradation, yellowing, peeling, flaking and bubbling caused by harsh household substances like cleaning chemicals and heat from pots and pans.

### BENEFITS:

- // Protects Surfaces from Daily Wear
- // Adds Warm Luster to Natural Concrete
- // Resists Water & Stains
- // Resists Heat from Pots & Pans
- // Makes Cleanup Easy
- // Low VOC, Food Safe & Non-toxic
- // Scratch Resistant

### SURFACES:

Interior concrete countertops



### SPECIFICATIONS:

<b>COVERAGE</b> Up to 30 sq.ft. per bottle	<b>COATS</b> 3	<b>CONCENTRATED</b> Yes
<b>VOC CONTENT</b> 0 g/L	<b>FINISH</b> Low Sheen	

### GLOSS LEVEL



## COUNTERTOP 745

HIGH GLOSS COUNTERTOP COATING

### DESCRIPTION:

A solvent-based, two-component, highly durable, glossy coating designed to protect concrete countertops. It provides incredible abrasion resistance, scratch resistance and chemical resistance. This high solid coating will deliver extended service life without the loss of flexibility or durability. Designed to withstand heavy use and provide long-term color retention and fade resistance, it is great for use on indoor concrete countertops where an extremely fast curing durable coating is needed.

### BENEFITS:

- // Fast Curing / High Durability
- // Protects Surfaces from Chemicals & Spills
- // Provides Long Term Color Retention
- // Abrasion, Scratch & Stain Resistant
- // Keeps Surfaces Cleanable, Attractive & Hygienic

### SURFACES:

Interior concrete countertops



### SPECIFICATIONS:

<b>COVERAGE</b> Up to 30 sq.ft. per bottle	<b>COATS</b> 1	<b>VOC CONTENT</b> 100 g/L
<b>FINISH</b> High Gloss		

### GLOSS LEVEL





## COUNTERTOP 770

STAIN-RESISTANT PROTECTIVE SEALER

### DESCRIPTION:

Countertop 770 is a natural finish (easy-to-use/water-based) concrete sealer featuring an oleophobic additive that repels oil-based stains, making kitchen counter clean-up simple and easy. Made specifically for concrete countertops, it surpassing anything else on the market by providing both water and oil blocking benefits. Food-safe once cured, this sealer preserves the beauty of a natural concrete finish and protects countertops against the ugly stains caused by UV light exposure, food, juice and the wear of everyday use.

### BENEFITS:

- // Supplied Concentrated
- // Non-Film Forming, Non-Toxic, Food Safe
- // Does Not Change The Look or Feel of The Surface
- // Easy to Use
- // Zero VOC's

### SURFACES:

Interior & exterior concrete, masonry, and stone countertops



### SPECIFICATIONS:

<b>COVERAGE</b> Up to 50 sq.ft. per bottle	<b>COATS</b> 2	<b>CONCENTRATED</b> Yes
<b>VOC CONTENT</b> 0 g/L	<b>FINISH</b> Dries Clear	

### GLOSS LEVEL



## COUNTERTOP 880

PENETRATING COUNTERTOP SEALER

### DESCRIPTION:

A natural finish, solvent-based concrete sealer featuring an oleophobic additive that repels water and resists stains. Countertop 880 makes cleanup simple and easy. Its ideal for concrete countertops and integral sinks where it penetrates deep into concrete and provides oleophobic and hydrophobic properties. Food-safe and non-toxic, this concrete sealer protects against the absorption of water, fluids, animal fats, oils, UV fading, and the wear of everyday use.

### BENEFITS:

- // Resists Water & Juice Stains
- // Invisible Natural Concrete Finish
- // Reduces Animal Fats & Oil Stains
- // Resists Heat from Pots & Pans
- // Makes Cleanup Easy
- // Low VOC, Food Safe & Non-toxic
- // Scratch Resistant

### SURFACES:

Interior/exterior concrete countertops, honed marble, tile, grout, travertine, natural stone and slate.



### SPECIFICATIONS:

<b>COVERAGE</b> Up to 50 sq.ft. per bottle	<b>COATS</b> 2	<b>VOC CONTENT</b> 100 g/L
<b>FINISH</b> Natural		

### GLOSS LEVEL





## HYDRO-STAIN™ 1500

WATER-BASED CONCRETE STAIN

### DESCRIPTION:

Water-based penetrating concrete stain and colorant that is a safer alternative to acid based stains. Made with high performance nanotechnology color pigment, Hydro-Stain™ 1500 penetrates deep below the surface giving concrete integral looking color hues. Enhances the natural characteristic of concrete by producing the same mottled look as acid stains. There is no neutralizing or rinsing required when using the Hydro-Stain™ 1500. This product can be used on overlay systems, concrete or decorative concrete.

### BENEFITS:


- // Adds Vibrancy to Any Concrete Surface
- // No Neutralizing or Rinsing Required
- // Eco-Friendly & Environmentally Safe
- // Concentrated / Various Strengths of Pigment
- // UV / Fade Resistant

### SURFACES:

Interior/exterior concrete, decorative concrete, concrete overlays, stone, masonry, pool decks, driveways, patios, walkways, garages, basement floors, office floors, memorials.



### AVAILABLE COLORS:



### SPECIFICATIONS:

<b>COVERAGE</b> Up to 200 sq.ft. per bottle	<b>COATS</b> 2	<b>CONCENTRATED</b> Makes 1 gallon
<b>VOC CONTENT</b> 0 g/L	<b>FINISH</b> Natural	

**Color Reference:**  
1. Accent Black 2. Amber 3. Seal Gray 4. Rust 5. Mahogany 6. Molasses



## PRO-FUSION™ 1505

COLOR INFUSED CONCRETE STAIN SYSTEM WITH BUILT-IN SEALER

### DESCRIPTION:


A pigmented, water-based, non-yellowing stain system designed for unsealed concrete, masonry and pavers. Infused with nano-sized color particles, the Pro-Fusion™ 1505 concrete stain system will provide a much stronger bond than typical polymer stains. It penetrates deeper and self-crosslinks to promote outstanding adhesion. It locks color deep below the surface, hiding imperfections to make surfaces look beautiful, even, and consistent in appearance. Available as a 2 or 3 step system, it contains a Primer, Solid Color, and Color Enhancer. It is capable of providing a uniform color or enhanced “mottled” color look on stamped concrete.

### BENEFITS:


- // Adds Color to Any Unsealed Concrete Surface
- // Solid Color or Enhanced Color
- // UV / Fade Resistant
- // Cross-Linking for Longer Service-Life

### SURFACES:

Interior/exterior concrete, decorative concrete, concrete overlays, stone, masonry, pool decks, driveways, patios, walkways, garages, basement floors, office floors, and memorials.

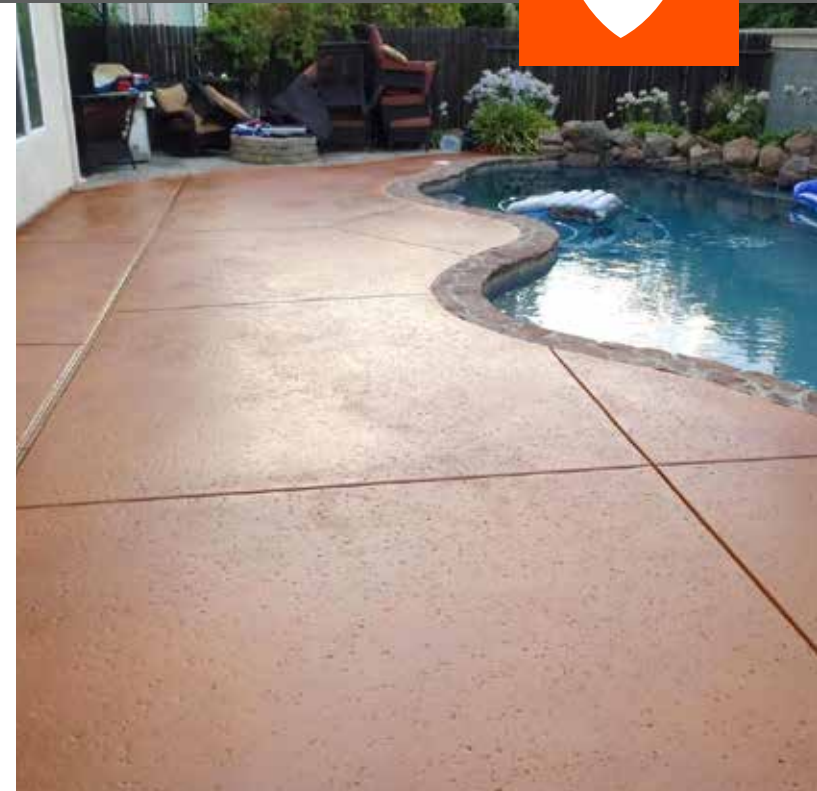

### SOLID COLORS:



### SEMI-TRANSPARENT / ENHANCED COLORS:



### SPECIFICATIONS:

<b>COVERAGE</b> Up to 200 sq.ft. per gallon	<b>VOC CONTENT</b> 0 g/L	<b>FINISH</b> Gloss
---	-----------------------------	------------------------

**Solid Color Reference:**  
1. Tan 2. Brown 3. Medium Gray 4. Dk. Tan 5. Dk. Gray 6. Dk. Red


**Semi-Transparent / Enhanced Color Reference:**  
1. Chocolate 2. Charcoal 3. Mocha

## SMALL PARTICLES. BIG RESULTS.

At 3000x magnification under a microscope, you can see the impact of Ghostshield® nanotechnology. The active particles react with the concrete material, forming additional CSH (calcium silicate hydrate) deep within the pores. Ghostshield® can significantly reduce the porosity of the concrete, increasing its density and making it up to 50% stronger. This reduction in the absorption of water will protect concrete from harmful, deleterious substances.



## DEEPER PENETRATION BETTER PROTECTION.

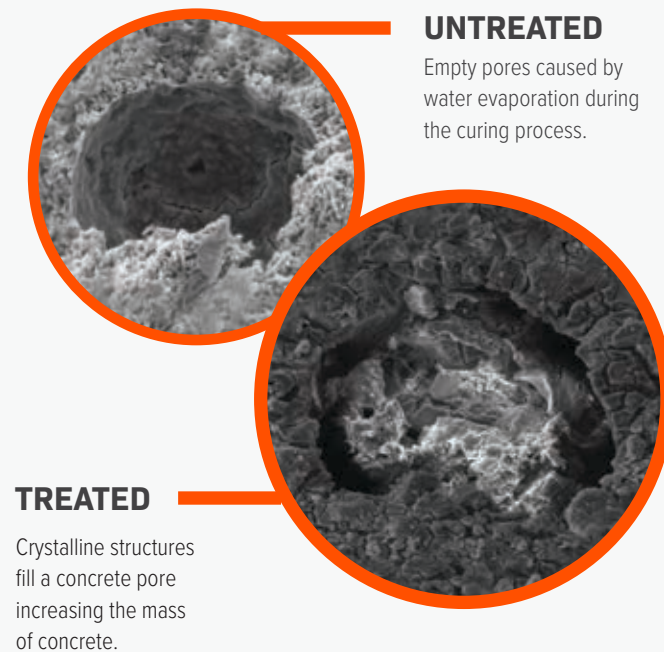

Actual results using a SEM (Scanning Electron Microscope) at 3000x magnification



## STRONG-FLEX™ DECK SYSTEM

VEHICULAR CONCRETE DECK  
COATING SYSTEM

### DESCRIPTION:

Strong-Flex™ is a liquid applied, seamless, waterproof, joint-free, crack-free, high solids, water-catalyzed polyurethane pedestrian deck system designed for concrete, wood and metal surfaces. Comprised of a primer, water-catalyzed polyurethane membrane coating, and an aliphatic urethane topcoat, Strong-Flex™ beautifies as it protects surfaces against spalling, freeze/thaw damage, and chemicals. This ultraelastomeric coating system will expand and contract and will not soften in heat or become brittle in cold temperatures.

### BENEFITS:


- // Waterproofs Concrete
- // Seamless Finish
- // Fills Ponds / Rough Concrete up to 10"
- // Fast Curing for Sloping

### SURFACES:

Parking decks, balconies, walkways, stairs, breezeways, roof decks, pool decks, patios, sun decks, mechanical rooms.



### AVAILABLE COLORS:

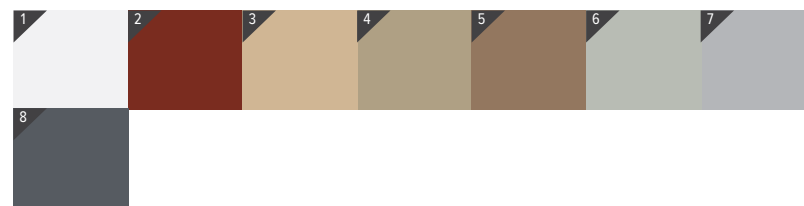

### TESTING DATA:



Strong-Flex™ exceeds the following tests:

- // ASTM C-957 // ASTM C-957 // ASTM D-75 // ASTM E-108
- // ASTM C-836 // ASTM D-412
- // PASS ACRC 10-024 WIND UPLIFT TEST
- // MIAMI DADE APPROVED
- // CLASS A FIRE RATED

Color Reference:  
1. White 2. Dark Red 3. Tan 4. Beige 5. Brown 6. Light Grey 7. Medium Grey 8. Dark Grey

### ASTM TESTED / MIAMI-DADE APPROVED:

Strong-Flex™ earned a Class A fire rating by Miami-Dade County. It also outperforms competitors by providing superior performance and weatherability capabilities. Strong-Flex™ was tested in accordance to ASTM C-957 for weight loss, wear abrasion resistance, adhesion chemical resistance tensile strength, stability, and retention. The choice is clear, Strong-Flex™ will provide years of beauty, protection, and reliability.

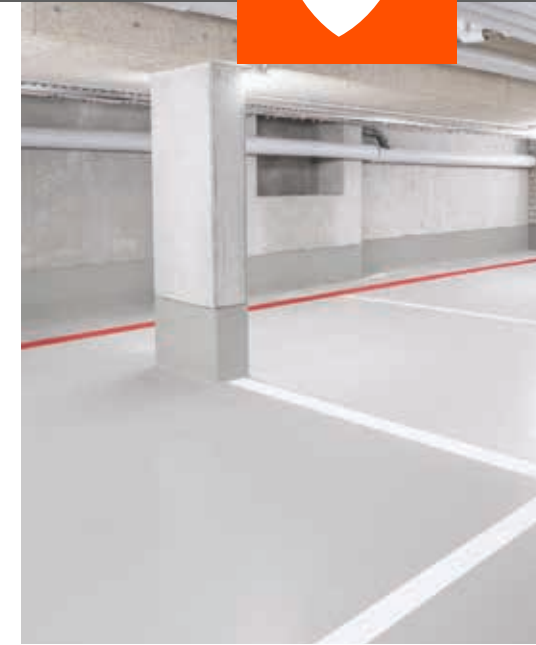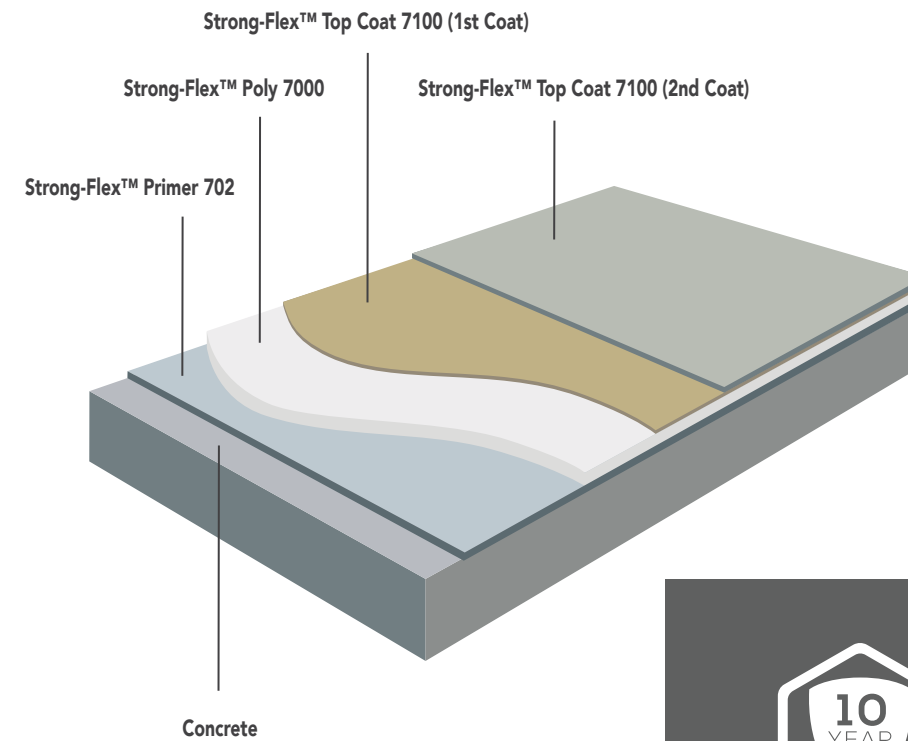

## 10 YEAR WARRANTY

We back Strong-Flex™ Decking System with an industry-leading 10 year limited warranty.

Ghostshield® manufacturers products that are designed to stand the test of time. It's why we stand behind our products longer than many of our competitors. Just another way Ghostshield® is working to protect.





## ISO-CURE™ 8520

DISSIPATING RESIN CURE & SEAL

### DESCRIPTION:

Easily removable dissipating resin cure and seal designed for freshly poured smooth trowel finish concrete. This easy-to-apply, water-based, sprayable, liquid-curing compound was designed to aid cement hydration during the curing process and quickly dissipate to allow for subsequent application of floor coverings, penetrating sealers, high performance coatings or waterproofing treatments. Dissipating properties are evident within one week of application and performs equally well in both interior and exterior applications. No removal required for floors that are to be diamond polished.

### BENEFITS:

- // Aids Hydration During Curing Process
- // Proven Long-Lasting Performance
- // Non-Yellowing
- // No Gloss Finish
- // 20% Solids Formula
- // Water-based / Low VOC Formula

### SURFACES:

Concrete, driveways, sidewalks, garages, warehouses, retail floors, industrial and commercial floors. New, freshly placed, broom finished, colored, and hard steel trowel concrete substrates. Not for use on cured concrete.



### SPECIFICATIONS:

**COVERAGE**  
100-300 sq.ft.  
per gallon

**COATS**  
1

**FINISH**  
No Gloss

**VOC CONTENT**  
100 g/L

### TESTING DATA:

- Iso-Cure™ 8520 exceeds the following tests:
- // ASTM C309, Type 1, Class A & B



## ISO-CURE™ C309

ACRYLIC RESIN CURE & SEAL

### DESCRIPTION:

A commercial grade, non-yellowing, high quality 100% pure methyl/methacrylate acrylic cure and seal compound with a fast drying accelerator. Iso-Cure™ C309 penetrates into the surface of new or cured concrete where it produces a clear protective coating that highlights color and resists surface abrasions, salt, oil, grease, stains and UV rays. When applied to freshly troweled concrete, it forms a membrane to aid cement hydration during the curing process. Great on flat work, exposed aggregate, stamped and colored concrete surfaces.

### BENEFITS:

- // Aids Hydration During Curing Process
- // Superior Penetration and Adhesion
- // Prevents Aggregate Pop-Out
- // Enhances Colored Concrete
- // 26% Solids Formula
- // Solvent-based / Low VOC Formula

### SURFACES:

Concrete and cementitious surfaces, driveways, sidewalks, garages, warehouses, retail floors, industrial and commercial floors. Cement based terrazzo, brick, stone and architectural concrete surfaces.



### SPECIFICATIONS:

**COVERAGE**  
100-300 sq.ft.  
per gallon

**COATS**  
1

**VOC CONTENT**  
< 400 g/L

**FINISH**  
Gloss

### TESTING DATA:

- Iso-Cure™ C309 exceeds the following tests:
- // ASTM C-1315, Type 1, Class A, B & C
  - // ASTM C-309, Type 1, Class A & B and Type 1D
  - // Fed. TTC-C-800A, Type 1, Class 1
  - // AASHTO Des. M-148., Type 1, Clear, DE CRD - C-300
  - // USDA Authorization for use in meat, poultry and food processing plants.



## ISO-CURE™ 8525

PENETRATING SILANE CURE & SEAL

### DESCRIPTION:

In addition to creating a clear, non-yellowing, protective moisture barrier, this unique formula also contains a proprietary blend of silanes that penetrate deep into the pores of the concrete to reduce water and salt penetration. By using Iso-Cure™ 8525 as a one-step product, waiting 28 days to reapply a penetrating sealer is now eliminated. Simply apply Iso-Cure™ 8525 to freshly troweled concrete to help hydrate during the curing process and protect the concrete against freeze-thaw cycles. Truly an all-in-one step solution.

### BENEFITS:





- // One-Step Acrylic & Silane Protection
- // Aids Hydration During Curing Process
- // Superior Water & Salt Protection
- // Proven Long-Lasting Performance
- // Non-Yellowing / Low Gloss Finish

### SURFACES:

Concrete, driveways, sidewalks, garages, warehouses, retail floors, industrial and commercial floors. New, freshly places, broom finished, colored, and hard steel trowel concrete substrates. Not for use on cured concrete.



### SPECIFICATIONS:

 <b>COVERAGE</b> 100-300 sq.ft. per gallon	 <b>COATS</b> 1	 <b>VOC CONTENT</b> 100 g/L
 <b>FINISH</b> Low Gloss		

### TESTING DATA:

Iso-Cure™ 8525 exceeds the following tests:

- // ASTM C309, Type 1, 1D Class A & B
- // NCHRP Series II, Series IV
- // AASHTO M-148, Type 1 & 1D, Class A & B - Liquid Membrane-Forming Compounds for Curing Concrete



## POLY-STRONG™

### PS-80

RAPID SETTING JOINT FILLER

### DESCRIPTION:

A new generation of polyurea technology, Poly-Strong™ PS-80 is a two component, 100% solids, rapid setting polymer liquid joint filler system that has a significantly faster set time and extended shave time. When cured, it produces a semi-rigid, rubber-like material that protects joints and edges from heavy loads and wheeled traffic. Designed for industrial concrete applications such as exposed concrete floors, warehouse floors and retail floors. Tough and flexible, Poly-Strong™ PS-80 reduces spalling, chipping, deterioration and cracks in joints with a hardness Shore A 80-81 level.

### BENEFITS:

- // Fast Setting to Reduce Downtime
- // Extended Shave Time for Greater Flexibility
- // Suitable for Filling Cracks
- // Moisture / Color Fade Resistant
- // Low Emitting / LEED v4.1 Compliant

### SURFACES:





Indoor Floors: Concrete, exposed concrete, warehouses, retail floors, crack repair in old floors, freezer floors, industrial and commercial floors.



### AVAILABLE COLORS:



### SPECIFICATIONS:

 <b>HARDNESS</b> Shore A 80-81	 <b>TENSILE STRENGTH</b> 505 PSI
 <b>CURE TIME</b> Tack Free: 3 min. Gel Time: 35 sec. Traffic Ready: 1 hr.	 <b>VOC CONTENT</b> 0 g/L

Color Reference:  
1. Cool Gray 2. Neutral Gray 3. Warm Gray



## POLY-STRONG™ PS-41

SURFACE RESTORING POLYMER

### DESCRIPTION:

This unique 95% solids, two-component, polyurethane/polyurea hybrid surface restoration grout was developed to resurface damaged concrete and floor imperfections such as air holes, sand aggregate pops, pitting, gouges and scratches. Hides imperfections and returns concrete floor surfaces to a “like-new” appearance. It’s a rigid structural polymer with a Shore D Hardness of 70-75 and is primarily used for fine grouting and repairing. Perfect for repairing defects smaller than 1/2” and perfecting the surface prior to polishing and sealing.

### BENEFITS:


- // Renews and Smooths Surfaces
- // Increases Density for a Higher Gloss
- // Corrects Minor Imperfections
- // Fast Setting to Reduce Downtime
- // Add Sand to Repair Joints & Cracks
- // LEED v4.1 Compliant

### SURFACES:

Indoor Floors: Concrete, exposed concrete, warehouses, retail floors, crack repair in old floors, industrial and commercial floors.



### AVAILABLE COLORS:



### SPECIFICATIONS:

<b>HARDNESS</b> Shore D 70-75	<b>TENSILE STRENGTH</b> 4184 PSI
<b>CURE TIME</b> Working: 5-8 min. Tack Free: 20 min. Grindable: 40 min.	<b>VOC CONTENT</b> 0 g/L

Color Reference:  
1. Tough Gray 2. Neutral Gray 3. Warm Gray



## POLY-STRONG™ PS-55

RAPID SETTING CRACK FILLER

### DESCRIPTION:

Two-component, 100% solids, polyurethane/polyurea hybrid crack filler designed for injection into vertical or horizontal cracks in structural materials including concrete, bricks, and stone. It bonds, repairs and seals cracks, spalls, pop-outs and defects in heavy traffic industrial concrete floors. When cured, Poly-Strong™ PS-55 is a highly durable rigid structural polymer with a Shore D Hardness of 70-75. It has very high adhesive and tensile properties; creating a long-lasting bond to the surface that outlasts many notable competing products. It is virtually odorless and is non-hazardous.


### BENEFITS:

- // Durable Concrete Repair in Minutes
- // Ready for Traffic in 15 Minutes
- // Low Viscosity and Self Leveling
- // Wide Application and Service Temp Range
- // High Tensile, Compressive, Elongation and Tear Strength
- // LEED v4.1 Compliant


### SURFACES:

Concrete, exposed concrete, warehouses, retail, industrial and commercial floors.

**Note:** Not designed for temperatures below 32°F (0°C)

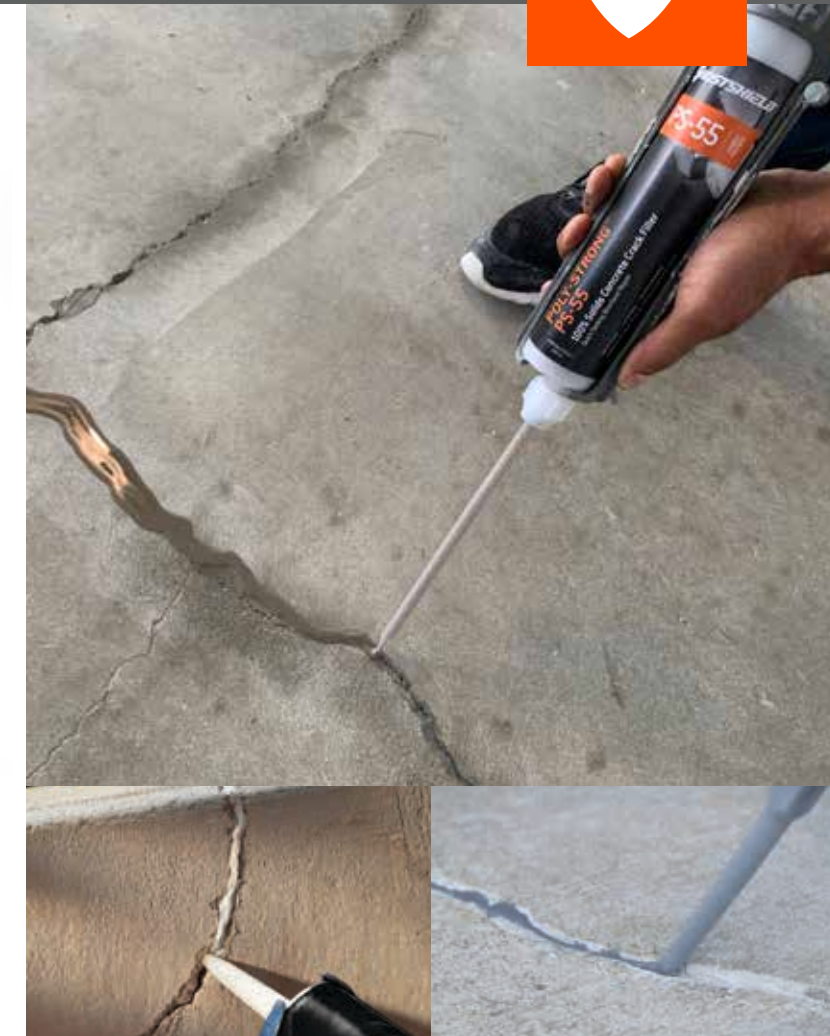

### AVAILABLE COLORS:



### SPECIFICATIONS:

<b>HARDNESS</b> Shore D 70-75	<b>TENSILE STRENGTH</b> 5500 PSI	<b>VOC CONTENT</b> 0 g/L
<b>CURE TIME</b> Gel Time: 1 min. Tack Free: 5 min. Traffic Ready: 15 min.	<b>COMPRESSIVE STRENGTH</b> 4000 PSI	

Color Reference:  
1. Cool Gray 2. Neutral Gray 3. Warm Gray 4. Tough Gray



# ADDITIONAL INFORMATION

---

Ghostshield® Distributor Partnership Programs and Certified Applicator Programs are designed to grow your business, ensure proper application, and help customers save money. These programs provide a strong foundation for sales, installation and maintenance of our extensive product line of concrete sealers and we remain committed to providing you with the best marketing resources, as well as product technicians with extensive industry experience.

# PARTNERSHIP PROGRAMS

Ghostshield® takes a partnership marketing approach to customer support. Ghostshield® representatives work directly with each retailer and distributor to develop and implement a comprehensive and fully integrated marketing program. This “Partnership Program” is designed to engage and influence customers during all phases of the decision-making process, from inspiration to education to purchase. Ghostshield® is committed to providing the right product mix and marketing support to drive sales.

## DIGITAL ASSETS

Everything Needed to Represent your Sealer Business Online



## SOCIAL MEDIA ADVERTISING

Increase Consumer Engagement & Drive Web Traffic



## GOOGLE BUSINESS LISTING

Localize Your Business Online



## DISPLAYS & SIGNAGE

Merchandising Solutions



## PRODUCT BROCHURES

Customer & Employee Education



## ASSORTMENTS THAT SUCCEED:

- Product Mix is Customized by Account
- Special Pricing on Preselected Assortments
- Signage Gives Product Overviews
- Improves Shopping Experience



## DEALER PORTAL:

- Easy-to-Use Order / Fulfillment
- Platform with Order History
- Marketing Items and More!

## GHOSTSHIELD® REWARDS

## REWARDS PROGRAM:

- Get Cash Back
- Earn Points with Each Purchase
- Bonus Points on Limited Time Offerings

# BECOME AN APPLICATOR



## JOIN A TEAM OF EXPERTS

When you become an applicator with Ghostshield®, you become part of a network of seasoned concrete applicators who pride themselves on years of industry experience.



Differentiate your concrete coatings business effectively when you become a Ghostshield® Applicator. Our exclusive applicator programs come with valuable benefits you won't get anywhere else. Our premium quality sealers are made to excel under the harshest conditions giving you an advantage over your competition even for the most challenging of applications.



## AS A GHOSTSHIELD® APPLICATOR, YOU:

- Promote and expand your product offerings and service.
- Special applicator pricing designed to increase your profit margin.
- Promote certification level benefits to potential clients and customers.
- Offer extended product warranties.
- Access to exclusive products that will improve and grow your business.
- Have Manufacturer Representatives standing behind your business, supporting you on industrial-size projects both on/off site.
- Access to senior level product technicians and project managers.
- Access to digital and printed marketing assets.

Ask your Ghostshield® representative for additional information about our Applicator Programs; including (but not limited to) product warranty coverage, pricing, fee schedules, and rewards program.

## ON-SITE TRAINING

In-Person or Virtual



## EXTENDED WARRANTY

Industry Leading Protection Gives You the Advantage



## PRODUCT EDUCATION

Customer & Employee Education



## BUSINESS WEB LISTING

Drive Ghostshield Customers to Your Website.





Name:	Item Number:	Size:	UPC:	Quantity:
<b>SURFACE PREPARATION</b>				
Micro-Degreaser™ 1100	1100-1G	1 Gallon (128 oz.)	855849005415	4 / Case
Micro-Degreaser™ 1100	1100-5G	5 Gallon (640 oz.)	855849005675	1 Each
Hydro-Etch™ 1000	1000-1G	1 Gallon (128 oz.)	855849005255	4 / Case
Eco-Etch™ 1001	1001-1G	1 Gallon (128 oz.)	855849005408	4 / Case
Eco-Etch™ 1001	1001-5G	5 Gallon (640 oz.)	855849005682	1 Each
<b>DENSIFIERS &amp; HARDENERS</b>				
Sila-Tek™ 3500	3500-1G	1 Gallon (128 oz.)	855849005019	4 / Case
Sila-Tek™ 3500	3500-55G	55 Gallon (7040 oz.)	855849005590	4 / Case
Lithi-Tek® 4500	4500-1G	1 Gallon (128 oz.)	855849005026	4 / Case
Lithi-Tek® 4500	4500-55G	55 Gallon (7040 oz.)	855849005453	4 / Case
<b>PENETRATING SEALERS</b>				
Lithi-Tek® 9500	9500-1G	1 Gallon (128 oz.)	855849005033	4 / Case
Lithi-Tek® 9500	9500-55G	55 Gallon (7040 oz.)	855849005446	4 / Case
Siloxa-Tek® 8500	8500-1G	1 Gallon (128 oz.)	855849005040	4 / Case
Siloxa-Tek® 8500	8500-55G	55 Gallon (7040 oz.)	855849005422	1 Each
Siloxa-Tek® 8500 Ultra Concentrate	8500UC-1G	1 Gallon (128 oz.)	855849005163	4 / Case
Siloxa-Tek® 8500 Ultra Concentrate	8500UC-55G	55 Gallon (7040 oz.)	855849005606	1 Each
Siloxa-Tek® 8505	8505-1G	1 Gallon (128 oz.)	855849005149	4 / Case
Siloxa-Tek® 8500	8505-55G	55 Gallon (7040 oz.)	855849005439	1 Each
Siloxa-Tek® 8505 Ultra Concentrate	8505UC-1G	1 Gallon (128 oz.)	855849005170	4 / Case
Siloxa-Tek® 8505 Ultra Concentrate	8505UC-55G	55 Gallon (7040 oz.)	855849005613	1 Each
Siloxa-Tek® 8510	8510-1G	1 Gallon (128 oz.)	855849005262	4 / Case
Siloxa-Tek® 8510	8510-5G	5 Gallon (640 oz.)	855849005279	1 Each
Siloxa-Tek® 8510	8510-55G	55 Gallon (7040 oz.)	855849005385	1 Each
<b>ACRYLIC COATINGS</b>				
Cryli-Tek® 5500	5500-1G	1 Gallon (128 oz.)	855849005057	4 / Case
Cryli-Tek® 5505	5505-1G	1 Gallon (128 oz.)	855849005064	1 Each
Cryli-Tek® 5505	5505-5G	5 Gallon (640 oz.)	855849005132	1 Each
Cryli-Tek® 5505	5505-55G	55 Gallon (7040 oz.)	855849005620	1 Each
Matting Agent 5000	5000-32OZ	32 oz.	855849005361	12 / Case
Grip-Tek 250	250-16OZ	16 oz.	855849005293	24 / Case
<b>RESINOUS COATINGS</b>				
Oil-Stop Primer 300	300-2G	2 Gallon (256 oz.)	855849005941	1 Each
Vapor-Tek™ 440	440-3G	3 Gallon (384 oz.)	855849005736	1 Each
Epoxy Max™ 100	100-3G	3 Gallon (384 oz.)	855849005972	1 Each
Armor-Tek™ 830 (Gloss)	830-2G	2 Gallon (256 oz.)	850032177399	1 Each
Armor-Tek™ 830 (Satin)	830-2GS	2 Gallon (256 oz.)	850032177634	1 Each
Polyaspartic 930	930-2G	2 Gallon (256 oz.)	855849005927	1 Each
Max Wear Urethane™ 960	960-1G	1 Gallon (256 oz.)	850032177328	1 Each
<b>COUNTERTOP SEALERS</b>				
Countertop 660	660-16OZ	16 oz.	855849005088	12 / Case
Countertop 745	745-32OZ	32 oz.	855849005118	12 / Case
Countertop 770	770-16OZ	16 oz.	855849005156	12 / Case
Countertop 880	880-16OZ	16 oz.	855849005309	12 / Case
Countertop Wax	WAX-2OZ	2 oz.	855849005125	24 / Case
<b>VEHICULAR DECK COATING SYSTEM</b>				
Strong-Flex™ Primer 702	702-1G	1 Gallon (128 oz.)	850032177092	1 Each
Strong-Flex™ Poly 7000	7000-5G	5 Gallon (640 oz.)	850032177108	1 Each
Strong-Flex™ Top Coat 7100	7100-5G	5 Gallon (640 oz.)	850032177115	1 Each
<b>CEMENTITIOUS OVERLAYS</b>				
Strong-Shield™ 365	365-5G	50 lbs.	855849005903	1 Each

Name:	Item Number:	Size:	UPC:	Quantity:
<b>STAINS &amp; COLORS</b>				
Hydro-Stain™ 1500 (Black)	1500-32OZ-BK	32 oz.	855849005491	12 / Case
Hydro-Stain™ 1500 (Gray)	1500-32OZ-GY	32 oz.	855849005484	12 / Case
Hydro-Stain™ 1500 (Rust)	1500-32OZ-RU	32 oz.	855849005507	12 / Case
Hydro-Stain™ 1500 (Amber)	1500-32OZ-AM	32 oz.	855849005514	12 / Case
Hydro-Stain™ 1500 (Mahogany)	1500-32OZ-MA	32 oz.	855849005521	12 / Case
Hydro-Stain™ 1500 (Molasses)	1500-32OZ-MS	32 oz.	855849005538	12 / Case
Pro-Fusion™ 1505 Primer/Sealer	1505-128OZ-P	1 Gallon (128 oz.)	855849005804	4 / Case
Pro-Fusion™ 1505 Color (Tan)	1505-128OZ-TN	1 Gallon (128 oz.)	855849005811	4 / Case
Pro-Fusion™ 1505 Color (Brown)	1505-128OZ-BN	1 Gallon (128 oz.)	850032177009	4 / Case
Pro-Fusion™ 1505 Color (Med. Gray)	1505-128OZ-GY	1 Gallon (128 oz.)	850032177016	4 / Case
Pro-Fusion™ 1505 Color (Dk. Tan)	1505-128OZ-DT	1 Gallon (128 oz.)	850032177023	4 / Case
Pro-Fusion™ 1505 Color (Dk. Gray)	1505-128OZ-DG	1 Gallon (128 oz.)	850032177030	4 / Case
Pro-Fusion™ 1505 Color (Dk. Red)	1505-128OZ-DR	1 Gallon (128 oz.)	850032177047	4 / Case
Pro-Fusion™ 1505 Enhancer (Chocolate)	1505-128OZ-CH	1 Gallon (128 oz.)	855849005828	4 / Case
Pro-Fusion™ 1505 Enhancer (Charcoal)	1505-128OZ-CC	1 Gallon (128 oz.)	850032177054	4 / Case
Pro-Fusion™ 1505 Enhancer (Mocha)	1505-128OZ-MO	1 Gallon (128 oz.)	850032177061	4 / Case
<b>CURE &amp; SEALS</b>				
Iso-Cure™ 8520	8520-5G	5 Gallon (640 oz.)	855849005781	1 Each
Iso-Cure™ 8525	8525-5G	5 Gallon (640 oz.)	855849005354	1 Each
Iso-Cure™ C309	C309-5G	5 Gallon (640 oz.)	855849005798	1 Each
<b>SURFACE REPAIR</b>				
Poly-Strong™ PS41 (Part A / Part B)	PS41-64OZ	64 oz.	855849005835	1 Each
Poly-Strong™ PS41 Color (Cool Gray)	PS41-8OZ-CG	8 oz.	855849005859	12 / Case
Poly-Strong™ PS41 Color (Neutral Gray)	PS41-8OZ-NG	8 oz.	850032177078	12 / Case
Poly-Strong™ PS41 Color (Warm Gray)	PS41-8OZ-WG	8 oz.	850032177085	12 / Case
Poly-Strong™ PS55 (Cool Gray)	PS55-250-CG	250ml (8.46 oz.)	855849005866	12 / Case
Poly-Strong™ PS55 (Neutral Gray)	PS55-250-NG	250ml (8.46 oz.)	850032177122	12 / Case
Poly-Strong™ PS55 (Warm Gray)	PS55-250-WG	250ml (8.46 oz.)	850032177139	12 / Case
Poly-Strong™ PS55 (Tough Gray)	PS55-250-TG	250ml (8.46 oz.)	850032177146	12 / Case
Poly-Strong™ PS80 (Cool Gray)	PS80-600-CG	600ml (20 oz.)	855849005873	12 / Case
Poly-Strong™ PS80 (Neutral Gray)	PS80-600-NG	600ml (20 oz.)	850032177153	12 / Case
Poly-Strong™ PS80 (Warm Gray)	PS80-600-WG	600ml (20 oz.)	850032177160	12 / Case
<b>ISO-TEK™ PRODUCTS</b>				
Iso-Tek™ 8100	8100-5G	5 Gallon (640 oz.)	855849005316	1 Each
Iso-Tek™ 8100	8100-55G	55 Gallon (7040 oz.)	855849005392	1 Each
Iso-Tek™ 8540 VOC	8540-5G	5 Gallon (640 oz.)	855849005323	1 Each
Iso-Tek™ 8540 VOC	8540-55G	55 Gallon (7040 oz.)	855849005668	1 Each
Iso-Tek™ 8501	8501-5G	5 Gallon (640 oz.)	855849005347	1 Each
Iso-Tek™ 8501	8501-55G	55 Gallon (7040 oz.)	855849005477	1 Each
Iso-Tek™ 8511	8511-5G	5 Gallon (640 oz.)	855849005330	1 Each
Iso-Tek™ 8511	8511-55G	55 Gallon (7040 oz.)	855849005699	1 Each
Iso-Tek™ 8515 AG	8515-5G	5 Gallon (640 oz.)	855849005774	1 Each
Iso-Tek™ 8515 AG	8515-55G	55 Gallon (7040 oz.)	855849005897	1 Each
Iso-Tek™ 8555 CMU	8555-5G	5 Gallon (640 oz.)	855849005576	1 Each
Iso-Tek™ 8555 CMU	8555-55G	55 Gallon (7040 oz.)	855849005880	1 Each





## PENETRATING SEALERS



Name	LITHI-TEK® 9500	SILOXA-TEK® 8500	SILOXA-TEK® 8505	SILOXA-TEK® 8510
<b>Function</b>	Proprietary Hybrid	Silane / Siloxane	Silane / Siloxane / Fluorocarbon	Silane / Siloxane / Fluorocarbon
<b>Carrier</b>	Water	Water	Water	Solvent
<b>Actives</b>	50%	40%	40%	100%*
<b>Finish</b>	Natural	Natural	Natural	Natural
<b>Coverage*</b>	200-250	200-250	200-250	250-300
<b>Ready-to-Use</b>	-	✓	✓	✓
<b>Concentrate</b>	✓	✓	✓	-
<b>Protects Against</b>	Water	Water, Salt	Water, Salt, Oil	Water, Salt, Oil
<b>Coats (Recommended)</b>	2	2	2	2
<b>VOC Level</b>	0 g/L	<90 g/L	<90 g/L	<300 g/L
<b>Location</b>	Indoor/Outdoor	Indoor/Outdoor	Indoor/Outdoor	Indoor/Outdoor

## DENSIFIERS



Name	SILA-TEK™ 3500	LITHI-TEK® 4500
<b>Function</b>	Sodium Silicate	Lithium Silicate
<b>Carrier</b>	Water	Water
<b>Actives</b>	100%	100%
<b>Finish</b>	Natural	Natural
<b>Coverage*</b>	100 - 400	100 - 400
<b>Ready-to-Use</b>	-	-
<b>Concentrate</b>	✓	✓
<b>Protects Against</b>	-	-
<b>Coats</b>	2	1
<b>VOC Level</b>	0 g/L	0 g/L
<b>Location</b>	Indoor/Outdoor	Indoor/Outdoor

## BASE COAT SOLUTIONS



Name	OIL-STOP PRIMER™ 300	VAPOR-TEK™ 440	EPOXY MAX™ 100
<b>Function</b>	Primer	Moisture Vapor Barrier	Base Coat
<b>Carrier</b>	Solvent	N/A	N/A
<b>Solids</b>	73%	100%	100%
<b>Finish</b>	Black	High Gloss	High Gloss
<b>Coverage*</b>	200 - 300	100	50-150
<b>Components</b>	2	2	2
<b>Thickness</b>	5-8 mils	16 mils	10-30 mils
<b>Protects Against</b>	Oil Stains	Water, Oil, Chemical	Water, Oil, Chemical
<b>Coats (Recommended)</b>	1	1	1
<b>VOC Level</b>	<330 g/L	<0 g/L	<30 g/L
<b>Location</b>	Indoor	Indoor	Indoor

## TOP COAT SOLUTIONS



Name	ARMOR-TEK™ 830	POLYASPARTIC™ 930	MAX WEAR URETHANE™ 960
<b>Function</b>	Top Coat	Top Coat	Top Coat
<b>Carrier</b>	Solvent	Solvent	Water
<b>Solids</b>	83%	93%	96%
<b>Finish</b>	High Gloss, Satin	High Gloss	Satin
<b>Coverage*</b>	300-500	150-200	500-800
<b>Components</b>	2	2	3
<b>Thickness</b>	2-5 mils	8 mils	2-3 mils
<b>Protects Against</b>	Water, Oil, Chemical	Water, Oil, Chemical	Water, Oil, Chemical
<b>Coats (Recommended)</b>	1	1	1
<b>VOC Level</b>	<100 g/L	<245 g/L	<95 g/L
<b>Location</b>	Indoor	Indoor	Indoor

## ACRYLIC COATINGS



Name	CRYLI-TEK® 5500	CRYLI-TEK® 5505
<b>Function</b>	Acrylic Polymer	Acrylic Polymer
<b>Carrier</b>	Water	Solvent
<b>Solids</b>	25%	34%
<b>Finish</b>	Low Gloss	High Gloss
<b>Coverage*</b>	200-300	200-300
<b>Ready-to-Use</b>	✓	✓
<b>Concentrate</b>	-	-
<b>Protects Against</b>	Water	Water
<b>Coats (Recommended)</b>	1	1
<b>VOC Level</b>	<80 g/L	<400 g/L
<b>Location</b>	Indoor/Outdoor	Indoor/Outdoor

## COUNTERTOP SEALERS



Name	COUNTERTOP 660	COUNTERTOP 770	COUNTERTOP 880	COUNTERTOP 745
<b>Function</b>	Acrylic Polymer	Silane / Siloxane / Fluorocarbon	Silane / Siloxane / Fluorocarbon	Polyaspartic
<b>Carrier</b>	Water	Water	Solvent	Solvent
<b>Actives/Solids</b>	26%	50%	100%	100%
<b>Finish</b>	Low Sheen	Natural	Natural	High Gloss
<b>Coverage*</b>	30	50	50	50
<b>Ready-to-Use</b>	-	-	✓	✓
<b>Concentrate</b>	✓	✓	-	-
<b>Protects Against</b>	Water	Water, Oil	Water, Oil	Water, Oil, Chemical
<b>Coats (Recommended)</b>	3	2	2	1
<b>VOC Level</b>	<0 g/L	<0 g/L	<300 g/L	<4 g/L
<b>Location</b>	Indoor	Indoor/Outdoor	Indoor/Outdoor	Indoor

## SURFACE PREPARATION



Name	HYDRO-ETCH™ 1000	ECO-ETCH™ 1001	MICRO-DEGREASER™ 1100
<b>Function</b>	Cleaner / Etcher	Cleaner / Etcher	Cleaner / Degreaser
<b>Active Ingredient</b>	Acid	Acid-Free	Water
<b>Coverage*</b>	Light: (9:1) 1500 sq.ft. Med: (4:1) 750 sq.ft. Heavy: (1:1) 300 sq.ft. Full Strength: 150 sq. ft.	Light: (2:1) 750 sq.ft. Med: (1:1) 300 sq.ft. Full Strength: 150 sq. ft.	Light: (10:1) 750 sq.ft. Med: (4:1) 300 sq.ft. Heavy: (1:1) 150 sq.ft.
<b>Concentrate</b>	✓	✓	✓
<b>Removes</b>	Concrete, Dirt	Concrete, Dirt	Dirt, Oil
<b>Req. Neutralizing</b>	Yes	No	No
<b>VOC Level</b>	0 g/L	0 g/L	0 g/L
<b>Location</b>	Indoor/Outdoor	Indoor/Outdoor	Indoor/Outdoor

## SURFACE REPAIR



Name	POLY-STRONG™ PS-80	POLY-STRONG™ PS-55	POLY-STRONG™ PS-41
<b>Function</b>	Polyurea	Polyurethane/ Polyurea	Polyurethane/ Polyurea
<b>Purpose</b>	Joint Filler	Crack Filler	Surface Restore
<b>Solids</b>	100%	100%	95%
<b>Components</b>	2	2	3
<b>Shore Hardness</b>	A 80-81	D 70-75	D 70-75
<b>Tensile Strength</b>	505 psi	5500 psi	4184 psi
<b>Tack Free</b>	3 min	5 min	20 min
<b>Full Cure</b>	1 hr	15 min	40 min
<b>Colors</b>	✓	✓	✓
<b>LEED v4.1</b>	✓	✓	✓
<b>Location</b>	Indoor	Indoor	Indoor

\*Coverage estimates are total sq. ft. for single coat, ready-to-use formulation. Coverage rates can vary based on texture and porosity of substrate.  
 †Coverage estimates are total sq. ft. amount per bottle. Coverage rates can vary based on texture and porosity of substrate.  
 ‡Actual levels can vary ±5%



CERTIFIED APPLICATOR

# TRUSTED BY THE PROS

Our products are used by hundreds of applicators, contractors, distributors, designers and architects worldwide. From large-scale industrial projects to smaller residential installations, Ghostshield® will provide years of functional and dependable concrete protection.





Standard Highline  
New York City  
Iso-Tek™ 8501



**GHOSTSHIELD.COM // 1 (855) 573-8383**

© 2023 KreteTek Industries, Inc.