

Sections

**03** 03 91 00  
Concrete Cleaning



## Technical Data Sheet

# HYDRO-ETCH™ 1000

A POWERFUL ACID-BASED CLEANER SPECIFICALLY FORMULATED TO CLEAN, BRIGHTEN AND ETCH CONCRETE, IN ADDITION TO REMOVING EFFLORESCENCE AND EXCESS CONCRETE

### Description

Hydro-Etch 1000 is a powerful acid-based cleaner, specifically formulated to clean, brighten and etch concrete, in addition to removing efflorescence and excess concrete residue.

### Actives

100%


### Appearance/color

Clear


### Coverage

Up to 1500 sq. ft.

EFFICIENCY OF CONCRETE CLEANERS

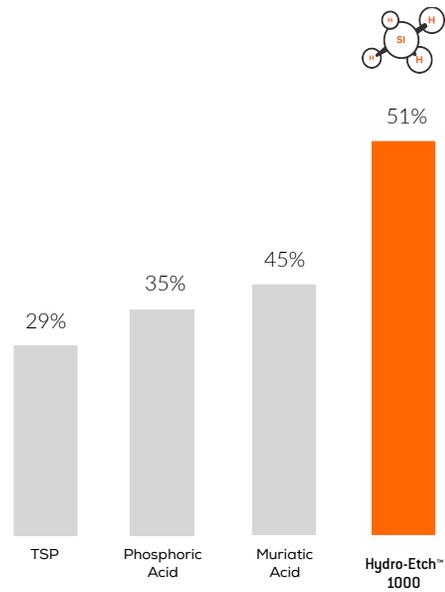

Percentage Improvement vs. Control

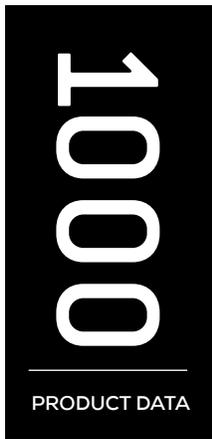

Sections

**03** 03 91 00  
Concrete Cleaning



## Technical Data Sheet

### TECHNOLOGY // ADVANTAGES

- **Etches concrete** - cleans and give porosity before sealing
- **Brightens concrete and masonry**
- **Helps remove excess mortar from brick**
- **Concentrated** - one gallon makes up to 6 gallons
- **Removes white salt deposits (efflorescence)** from brick, concrete and masonry
- **Removes dirt and stains** - and cleans algae and scum

#### TYPICAL PROPERTIES

**Appearance** - Yellowish, clear liquid

**Packaging** - 1 gallon concentrate (3.78 L), 55 gallon (208 L) drums

#### Precautions


CAUTION: Wear protective clothing, rubber gloves and plastic safety goggles while using. Contact with eyes can cause irreversible damage and permanent blindness. Contact with skin (even for a few moments) can cause severe burns. Ingestion may be fatal.

DANGER: POISON! Keep out of reach of children and pets. May be fatal if swallowed. Causes severe burns and vapor is harmful.

#### Application

1. **Caution! Always add Hydro-Etch 1000 to water, not water to Hydro-Etch 1000.** If you pour water into Hydro-Etch 1000 it can cause an explosive reaction that can spray you with the mixture and burn your skin! Mix solution slowly in an open-top plastic container. Do not splash. Stir gently with plastic or bare wood. Ratio varies by desired use: use a higher ratio for cleaning or a lower ratio for etching. Sample and test on a small area until desired effect is achieved. Suggested dilution ratio for etching concrete is one (1) part Hydro-Etch 1000 to one (1) part water.

2. Before cleaning or etching, make sure the concrete is free of all oil, contaminants, grease, and dirt. Contrary to what many people think, acid will not clean grease and oil spots. In fact, if these areas have not been cleaned and degreased properly, the acid solution will just sit on top and not react with the concrete.

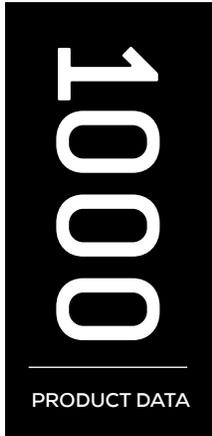

Sections

**03** 03 91 00  
Concrete Cleaning

APPLICATION

**Application (Continued)**

3. **Apply the acid solution:** A plastic watering container works well to sprinkle Hydro-Etch 1000 on the concrete. This will spread the solution evenly without much splashing. Do not just pour it on the concrete. This will create an inconsistent spread of the acid solution and will not provide for a uniform result.

4. **Scrub the acid solution:** Once the solution is applied, lightly scrub it into the concrete with a push broom or long handled scrub brush. This helps to create a uniform etch of the concrete. Let the solution sit from 2 – 15 minutes while it continues to fizz and bubble. Flush thoroughly with clean water immediately after cleaning or etching is complete. If applying a sealer, neutralize completely after use and rinse twice.

5. **Neutralize:** Mix 4 cups of baking soda to 1 gallon of water in a large 5 gallon bucket and pour it into the now empty watering container. Or use 4 ounces of household ammonia to 1 gallon of water. Sprinkle the neutralizing solution over the part of the floor that was etched and let it sit for a minimum of 10 minutes. When time is up, rinse the neutralized solution with your hose into a drain or out the garage (if local water codes allow it). Another method is to use a wet vac and then dispose of the solution according to your local codes. Check the surface of the concrete at this time. It should feel similar to medium grit sand paper with a uniform texture. If not, you will need to repeat the process again.

6. **Final rinse:** Once the initial neutralizing solution is cleaned up, it is important to thoroughly flush and rinse the remaining solution out of the concrete multiple times. It can leave a white powdery residue on your floor once dried (called calcium carbonate) if you do not do this. This is a fine dust that will not allow your coating to adhere properly. Use a high pressure nozzle while thoroughly scrubbing the concrete with your scrub brush. Make sure it is thoroughly rinsed. Using a pressure washer at this point works well also. Do not use a pressure washer to rinse off the initial neutralizing solution however. It can drive any acid solution that had not been neutralized yet deeper into the concrete and cause problems later.


**Application - (Continued)**

**pH test your rinse water:** After your final rinse, dab a pH test strip onto the still wet floor to check the pH. Anything between 6.0 and 9.0 will work for most coatings with 7.0 (neutral) being ideal. If it's below 6.0 then the water is indicating that acid residue is still in the pores of the concrete. Rinse some more and repeat the test until you get the results you want.

**Further Tips for Etching Concrete:** It's a good idea to cover anything that you don't want to get splashed with a plastic drop cloth. Don't acid etch the concrete if the temps are below 50 degrees as the acid will not be as effective with the cooler temperatures. Also, make sure your floor has dried thoroughly before applying a concrete sealer. Fans will help. Give it at least two days with warm weather and longer if it's humid or cooler. Though the surface may be dry, the pores of the concrete can still contain moisture and escape through outgassing when the temperatures rise during the day. This will cause your coating to not properly adhere. You can always do a quick moisture test with plastic if you are not sure.

**Clean Up**

Clean equipment and tools with hot soapy water. Unused or old material may be disposed of in a waste disposal site in accordance with local, state and federal laws.

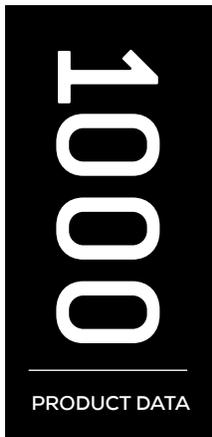

Sections

**03** 03 91 00  
Concrete Cleaning

## APPLICATION

### Precautions/Safety

Avoid contact with skin, eyes and clothing, do not take internally. Use appropriate safety equipment during application and handling. Please refer to the safety data sheet (SDS) for additional precautionary instructions before use.

### Best Performance

- Proper application is the responsibility of the user.
- Make sure the most current versions of product data sheets and SDS are being used.

### Coverage

Hydro-Etch 1000 is concentrated. 1 gallon can cover up to 1500 sq. ft. Variations in texture and porosity of substrate may affect the coverage and performance of the product.

### KreteTek Industries Inc.

66 River Road  
Hudson, NH 03051

[www.Ghostshield.com](http://www.Ghostshield.com)

### Customer Service and Technical Support

1-855-KreteTek (1-855-573-8383)

### Warranty

KreteTek Industries Inc. warrants our products are manufactured to strict quality assurance specifications and that the information supplied by us is accurate to the best of our knowledge. Such information supplied about our products is not a representation or a warranty. It is supplied on the condition that you shall make your own tests to determine the suitability of our product for your particular purpose. Any use or application other than recommended herein is the sole responsibility of the user. Listed physical properties are typical and should not be construed as specifications. No warranty is made, expressed or implied, regarding such other information, the data on which it is based or the results you will obtain from its use. We shall have no liability for incidental or consequential damages, direct or indirect. No representative is authorized to make any representation or warranty or assume any other liability on our behalf with any sale of our products.

Acceptance of delivery of our product means that you have accepted the terms of this warranty whether or not purchase orders or other documents state terms that vary from this warranty. No representative is authorized to make any representation or warranty or assume any other liability on our behalf with any sales of our products. Our products contain chemicals that may cause serious physical injury. Before using, read the Safety Data Sheet and follow the precautions to prevent bodily harm.

Purchaser must determine the suitability of the products for the intended use and assumes all risks and liabilities in connection therewith. This information and all further technical advise are based on KreteTek Industries Inc. present knowledge and experience. However, KreteTek Industries Inc. assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights, nor shall any legal relationship be created by or arise from the provision of such information and advice. KreteTek Industries Inc. reserves the right to make any changes according to technological progress or further developments. The Purchaser of the Product(s) must test the product(s) for suitability for the intended application and purpose before proceeding with a full application of the product(s). Performance of the product described herein should be verified by testing and carried out by qualified experts.

### For professional use only.

Last revised 4/18