

<b>MODEL</b>	TRL-GC2-24-M
<b>VOLTAGE</b>	25.6V
<b>NOMINAL CAPACITY</b>	65Ah (1,751Wh)
<b>CASE</b>	Maroon Colored ABS/FR
<b>BATTERY</b>	Deep-Cycle Lithium Iron Phosphate
<b>CYCLE LIFE</b>	>4000 cycles @70% DoD (to 70% of initial capacity) at 25°C*
<b>INTELLIGENCE</b>	Internal battery disconnect, redundant protections using three levels of fusing, state of charge indicator with aging compensation, CAN-Bus communication



**PHYSICAL SPECIFICATIONS**

BCI	MODEL	TERMINAL TYPE <sup>1</sup>	TERMINAL TORQUE IN-LBS (NM)	DIMENSIONS INCHES (MM)			WEIGHT <sup>2</sup> LBS. (KG)	HANDLES	INSTALLATION ORIENTATION
				LENGTH	WIDTH	HEIGHT			
GC2	TRL-GC2-24-M	M8-1.25 x 15mm Stud	80-90 (9-10)	10.4 (264)	7.1 (180)	10.9 (278)	37 (16.8)	Removable	Vertical

**ELECTRICAL SPECIFICATIONS**

VOLTAGE	CAPACITY AMP-HR (AH) @ 77°F (25°C)			ENERGY (WH)
	5-Hr (13A)	10-Hr (6.5A)	20-Hr (3.25A)	
25.6V	65	65	65	1,751

**OPERATIONAL SPECIFICATIONS**

OPERATING TEMPERATURE RANGE	STORAGE TEMPERATURE RANGE
-4°F to 113°F (-20°C to 45°C)	-40°F to 140°F (-40°C to 60°C)

**CHARGER INSTRUCTIONS**

CHARGER SETTINGS (USING LITHIUM-ION CHARGER)	
Lithium-ion Charger Compatibility Guide	
Recommended Charging Voltage	27.4V to 28.0V
Maximum Charging Current @ Temperature	
< 32°F (< 0°C)	0A
32°F to 50°F (0°C to 10°C)	20A
50°F to 68°F (10°C to 20°C)	34A
68°F to 113°F (20°C to 45°C)	68A
> 113°F (> 45°C)	0A

**OTHER SPECIFICATIONS**

PERFORMANCE AND SYSTEM SPECIFICATIONS @ 77°F (25°C)	
Maximum Continuous Discharge Current	90A
Maximum Pulse Discharge Current (30 sec)	100A
Maximum Instantaneous Discharge Current (0.4 sec)	160A
Reserve Capacity @ 25A	156 Min
Battery Internal Protection	Short Circuit Current Temperature Over Voltage Under Voltage Over-current
Battery Functions	Cell Balancing, State of Charge, CAN-Bus Communication
Safety Systems	Fuse, hardware, BMS
Discharge Voltage Cutoff	20.24V
Environmental Protection	IP67
Shipping Classification	UN3480, Class 9
Case Flame Rating	UL94 V-0

**SAFETY/AGENCY INFORMATION**


CERTIFIED TO THE FOLLOWING		
UN/DoT 38.3	Cells: IEC 62133-2, UL 1642, UN38.3	FCC Part 15
ROHS Compliant	UL 2271, UL 1998, UL 991 (Pending)	CE




Do not mix with lead-acid batteries when recycling  
\*At C/2 rate and depending on application/user conditions

## CYCLE LIFE

### To 70% INITIAL CAPACITY

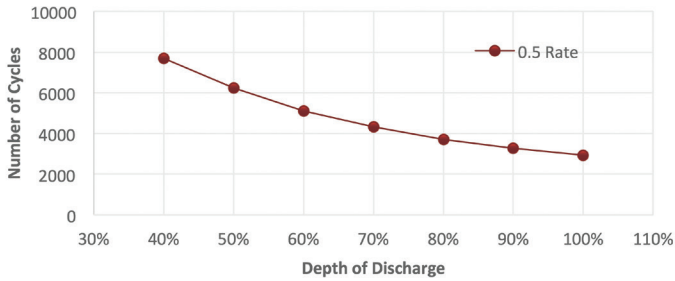

## DISCHARGE PROFILE

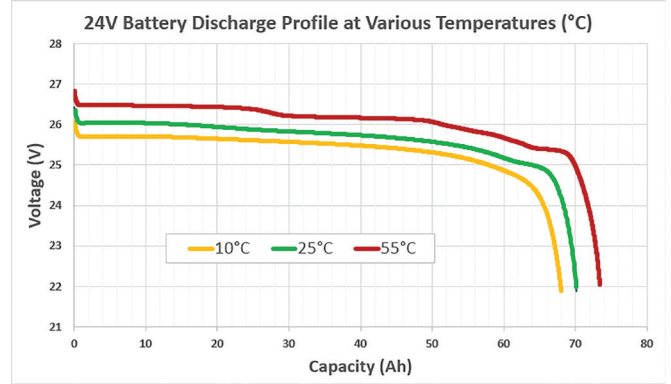

## STATUS INDICATOR GUIDE


LED COLOR INDICATION	BATTERY CONDITION	INDICATOR VISUAL
4 Blue LEDs	76% to 100% Capacity Remaining	
3 Blue LEDs	51% to 75% Capacity Remaining	
2 Blue LEDs	26% to 50% Capacity Remaining	
1 Blue LED	0% to 25% Capacity Remaining	
Red LED	Active Alarm / Fault Condition in the Battery	
Green LED	Normal Operation	

The Trojan® GC2 24V Lithium-Ion features include a battery status push button and indicator light on the top of the case. A momentary press of the button displays the battery's State of Charge and operating status.

**NOTE:** Consult Trojan® GC2 Series Lithium-Ion Batteries User's Guide for more information at [trojanbattery.com](http://trojanbattery.com)

## BATTERY DIMENSIONS

Dimensions: inches (mm)

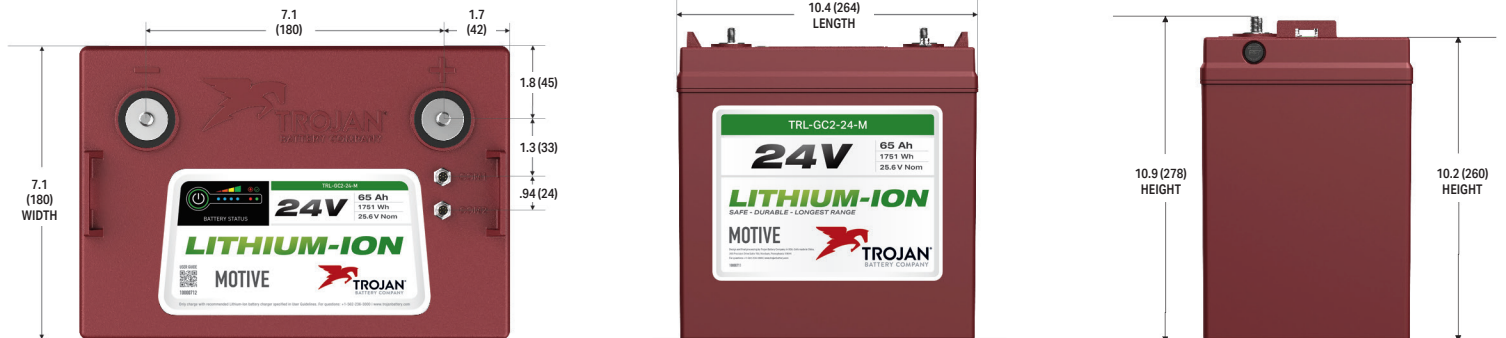

## TECHNICAL SUPPORT

Call Trojan Battery Technical Support:

United States and Canada: 800-423-6569, dial ext. 3045  
International: +1-562-236-3045

Email: [technical@trojanbattery.com](mailto:technical@trojanbattery.com)

On the web: [trojanbattery.com/resources/technical-support](http://trojanbattery.com/resources/technical-support)

UN38.3 PASSED  
TRANSPORTATION  
SAFETY  
CERTIFIED



TROJAN BATTERY  
COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV  
= ISO 9001:2015 =

A. Terminal images are representative only  
B. Weight may vary

