


Z5i+ PERFORMANCE ELEVATED, *GREATNESS DEFINED*

BRW2m-i

- Reticle that has been created for hunters who want the flexibility to compensate for the shooting distance with the ballistic turret, the reticle, or a combination of the two.
- 0.5 MRAD between each elevation holdover
- Elevation holdover values of 1 to 5 mrad are numbered
- 0.5 MRAD distances between each windage mark on the main crosshair
- 0.5 MRAD between each windage mark on the hold over lines.
- The middle point of the reticle is illuminated

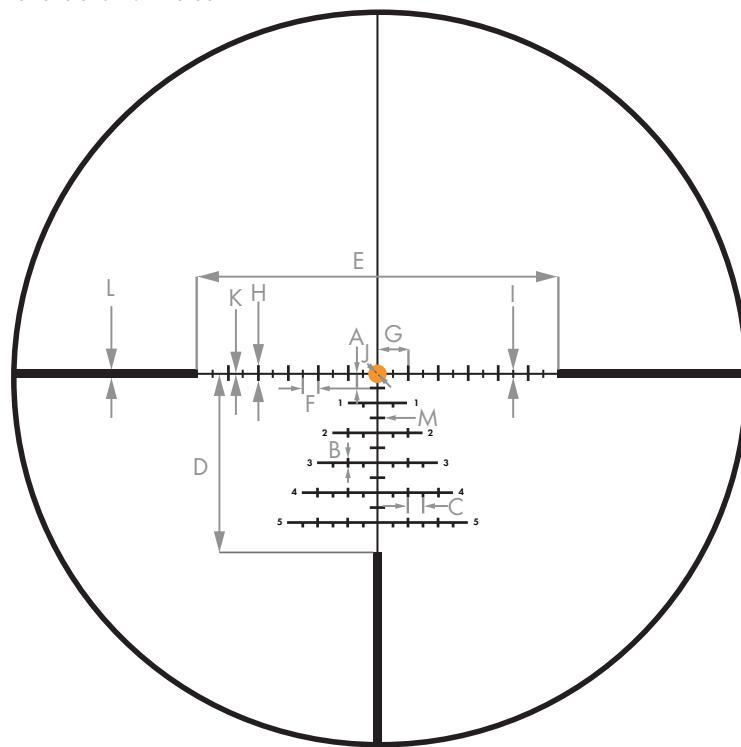

SUBTENSION DIMENSION (MRAD)

MRAD	A	B	C	D	E	F	G	H	I	J	K	L	M
Z5i+ 3.5-18x50 P L BT	0.5	0.25	1	6	12	0.5	1	0.5	0.25	0.08	0.04	0.26	0.5
Z5i+ 5-25x56 P L BT	0.5	0.25	1	6	12	0.5	1	0.5	0.25	0.08	0.04	0.26	0.5

The shown values only apply to the highest magnification of the scope.

Values for other magnifications can be found online in the

SWAROVSKI OPTIK Ballistic Program. 01/2026



SWAROVSKI
OPTIK

SEE THE UNSEEN