

HARPER FLUSHMOUNT

URBAN OUTFITTERS

Assembly Instructions

TOOLS REQUIRED BUT NOT INCLUDED:
Phillips Screwdriver, Wire Cutters

WARNINGS:

Do not throw away packing materials and carton until after assembly.

Ensure all parts are present prior to assembly.

Contact customer service immediately if parts are missing.

Assemble all parts on a clean smooth surface.

A licensed professional electrician should install direct wire fixtures.

Use (2) two MAX 40W Type A incandescent bulbs.

CARE INSTRUCTIONS:

Avoid direct exposure to sunlight.

Do not place over heat or air conditioning vents.


Adjust levelers so that the furniture sits flat on uneven floors.

Blot spills with a clean white cloth, do not rub.

Do not use harsh chemicals.

Before cleaning any part test a small spot in a hidden area.

You may need to re-tighten all bolts after initial use.

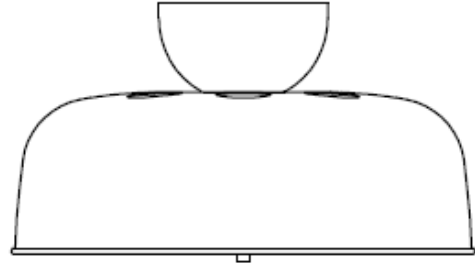


PARTS INCLUDED:




(A) Wall Nuts x 3



(B) Mounting Plate




(C) Mounting Screws
[8#-32TX25mm] X2



(D) Canopy Screws
[5/32-32T*15mmL] X2



(E) Lamp Body



(F) Diffuser



(G) Finial

HARPER FLUSHMOUNT

URBAN OUTFITTERS

Assembly Instructions

STEP 1

Ensure power to the existing wires is turned off at the electrical panel.

STEP 2

Insert the existing wires through the center opening of the mounting bracket (B). Attach the mounting bracket (B) to the existing electrical box using the mounting screws (C). Tighten each screw until the mounting bracket (B) is firmly secured.

STEP 3

Carefully inspect the fixture's wires:

- Neutral fixture wire = white
- Hot fixture wire = black
- Ground wire = green
 - a) Attach the existing ground wire to the fixture ground wire with a wire nut, and wrap the connection with electrical tape.
 - b) Attach the hot fixture wire to the existing hot wire.
 - c) Attach the neutral fixture wire from the pendant to the existing neutral wire.
 - d) Fasten each together with a wire nut and wrap the connection with electrical tape.

STEP 4

Place the Lamp Body (E) onto Mounting Bracket (B) and then secure with Canopy Screws (D).

STEP 5

Insert the specified light bulb into the socket. DO NOT EXCEED THE SPECIFIED WATTAGE.

STEP 6

Place the diffuser (F) into the lamp body (E) then secure it by screwing the finial (G) onto the lamp body (E).

STEP 7

Reconnect main electrical supply from the fuse box/circuit breaker and enjoy your new lamp.

Use (2) two MAX 40W Type A incandescent bulbs. Do not use bulb that exceeds recommended wattage.

