

RATTAN DAISY TIE BACK

URBAN OUTFITTERS

Assembly Instructions

TOOLS REQUIRED BUT NOT INCLUDED:

#2 Phillips head screwdriver, Drill, Pencil, Level

WARNINGS:

Do not throw away packing materials and carton until after assembly.

Ensure all parts are present prior to assembly.

Contact customer service immediately if parts are missing.

Assemble all parts on a clean smooth surface.

CARE INSTRUCTIONS:

Avoid direct exposure to sunlight.

Do not place over heat or air conditioning vents.


Adjust levelers so that the furniture sits flat on uneven floors.

Blot spills with a clean white cloth, do not rub.

Do not use harsh chemicals.

Before cleaning any part test a small spot in a hidden area.

You may need to re-tighten all bolts after initial use.

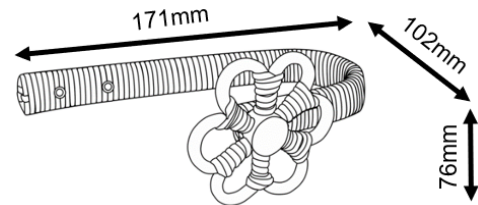


PARTS INCLUDED:



(A) Screw JF
(#8 x 38mm) x4



(B) Plastic Anchor
(S6) x4

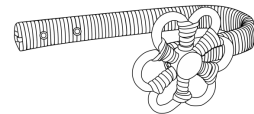

(C) Tie Back x2

RATTAN DAISY TIE BACK

Assembly Instructions

URBAN OUTFITTERS

STEP 1

Place the tie back (C) on the wall in your desired location. If drilling into a stud, double check that the tie back is level, then drill screws (A) through the predrilled holes in the tie back (C) and into the wall. If you are hanging the tie back on drywall, mark the location of the tie back on the wall through all the predrilled mounting holes in the tie back, or using the dimensions below. Remove the tie back from the wall and pre-drill holes for the plastic anchors (B) at the marked locations then, insert them into the wall. Next, insert screws (A) through the mounting holes in the tie back (C) and into the wall anchors (B), partially tightening all the screws (A). Once all the screws are inserted and partially tightened, tighten all fully.

