

GINA FLUSH MOUNT

URBAN OUTFITTERS

Assembly Instructions


TOOLS REQUIRED BUT NOT INCLUDED:
Phillips Screwdriver •Tape measure •Pencil

WARNINGS:

Do not throw away packing materials and carton until after assembly.
Ensure all parts are present prior to assembly.
Contact customer service immediately if parts are missing.
Assemble all parts on a clean smooth surface.
Use a MAX 6W LED Type A bulb.

CARE INSTRUCTIONS:


Avoid direct exposure to sunlight.
Do not place over heat or air conditioning vents.
Adjust levelers so that the furniture sits flat on uneven floors.
Blot spills with a clean white cloth, do not rub.
Do not use harsh chemicals.
Before cleaning any part test a small spot in a hidden area.
You may need to re-tighten all bolts after initial use.

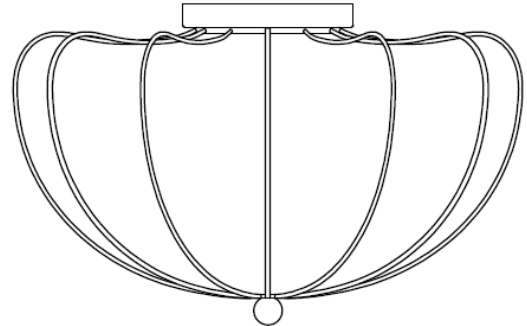


PARTS INCLUDED:



(A) Wall Nuts x 3




(B) Mounting Plate




(C) Mounting Screws
[8#-32TX25mm] X2



(D) Nut x 2



(E) Lamp Body

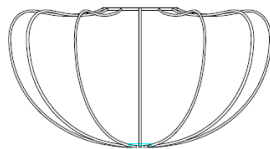

(F) Lampshade



(G) Finial

STEP 1

Insert the J-box wires through the center opening of mounting plate (B). Attach mounting plate (B) to the outlet box using J-Box mounting screws (C). Tighten the screws until the mounting plate is firmly secured to the J-Box.

STEP 2

Carefully inspect the fixture's wires:

- Neutral fixture wire = white
- Hot fixture wire = black
- Ground wire = green

- a) Wrap the ground wire of the junction box around the ground screw on the mounting plate and secure the screw
- b) Attach the remaining ground wire from the junction box to the fixture ground wire with a wire nut, and wrap the connection with electrical tape and wrap the connection with electrical tape.
- c) Attach the hot fixture wire from the pendant to the hot junction box wire.
- d) Fasten each together with a wire nut and wrap the connection with electrical tape.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED

STEP 3

Position the lamp body (E) under the mounting plate (B); align the holes and secure them using Nuts (D).

STEP 4

Insert the specified light bulbs into the sockets. **DO NOT EXCEED THE SPECIFIED WATTAGE.**

STEP 5

Attach lampshade (F) to lamp body (E) and secure it by turning Finial (G) clockwise.

STEP 6

Reconnect main electrical supply from the fuse box/circuit breaker and test fixture, and enjoy your new lamp.

Use a MAX 6W LED Type A bulb. Do not use bulb that exceeds recommended wattage.

