Silas Side Table
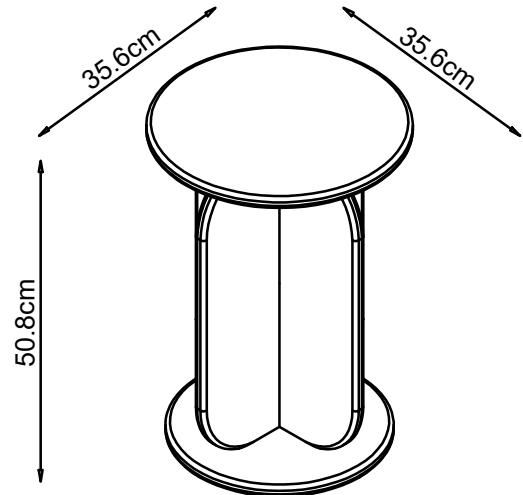## Assembly Instructions

URBAN OUTFITTERS


NO ADDITIONAL TOOLS REQUIRED

WARNINGS:
Do not throw away packing materials and carton until after assembly.
Ensure all parts are present prior to assembly.
Contact customer service immediately if parts are missing.
Assemble all parts on a clean smooth surface.

CARE INSTRUCTIONS:
Avoid direct exposure to sunlight.
Do not place over heat or air conditioning vents.
Adjust levelers so that the furniture sits flat on uneven floors.
Blot spills with a clean white cloth, do not rub.
Do not use harsh chemicals.
Before cleaning any part test a small spot in a hidden area.
You may need to re-tighten all bolts after initial use.

35.6cm   35.6cm   50.8cm

PARTS INCLUDED:

1) Table Top
(14 x 14 x 0.7") x 1
or
(35.6 x 35.6 x 1.8 cm)

2) Table Base
(12 x 12 x 0.7") x 1
or
(30.5 x 30.5 x 1.8 cm)

3) Leg
(18.5 x 12 x 0.7") x 2
or
(46.9 x 30.5 x 1.8 cm)

A) Bolt
(D 0.47 / 0.24 x 1.18") x 4
or
(D 12 x 30 mm)

B) Spring Washer
(D 0.47 / 0.24 x 0.08") x 4
or
(D 12 / 6 x 2 mm)

C) Flat Washer
(D 0.63 / 0.24 x 0.08") x 4
or
(D 16 / 6 x 2 mm)

D) Bolt
(D 0.47 / 0.24 x 0.59") x 8
or
(D 12 / 6 x 15 mm)

E) Allen Key
(D 0.16 x 2.32") x 1
or
(D 4 x 59 mm)

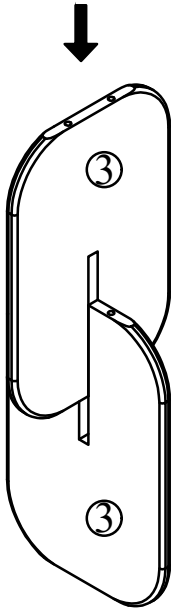F) Metal Plate
(5 x 5 x 0.08") x 1
or
(127 x 127 x 2 mm)

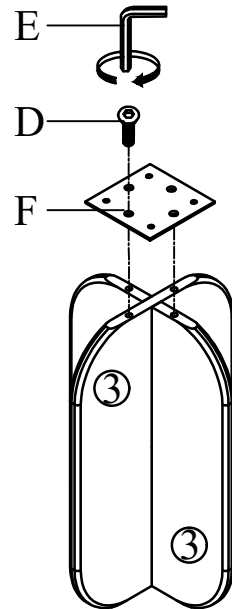09.12.2024

Silas Side Table

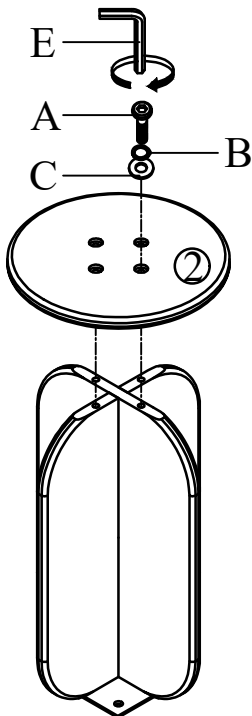Assembly Instructions

STEP 1
Attach Legs (3) as shown.

STEP 2
Align the Metal Plate (F) to the Legs (3) as shown.
Insert Bolts (D) through the metal plate (F) and into
the legs (3) then, tighten using Allen Key (E) as
shown.

STEP 3

Align the Table Base (2) to the Legs (3) as shown. Insert
Bolts (A) Spring Washers (B), Flat Washers (C) as shown
then, tighten with the Allen key (E).

STEP 4

Place the Table Top (1) upside down, then place the
table base on top as shown. Insert the Bolts (D)
through the metal plate (F) then, tighten using Allen
Key (E). Flip the table upright to finish the
installation.

09.12.2024