


Departures Performance

Track Keeping

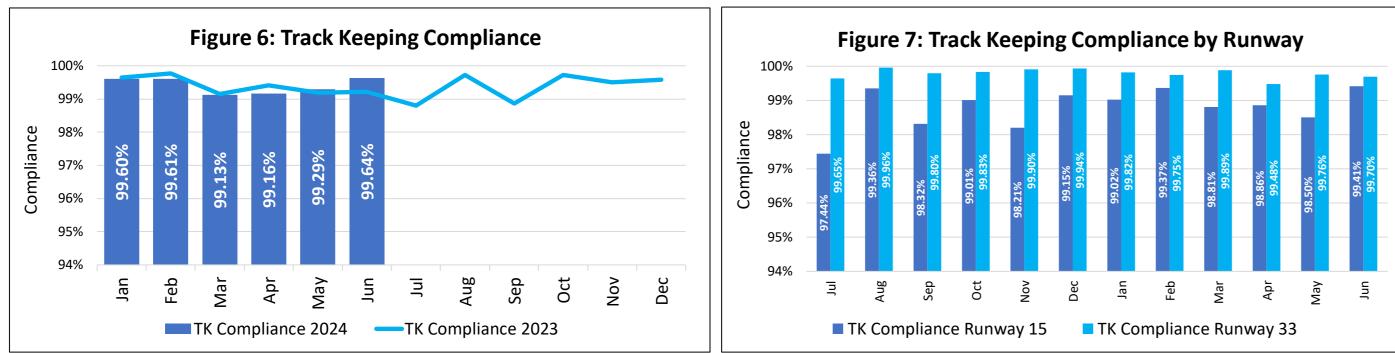

of

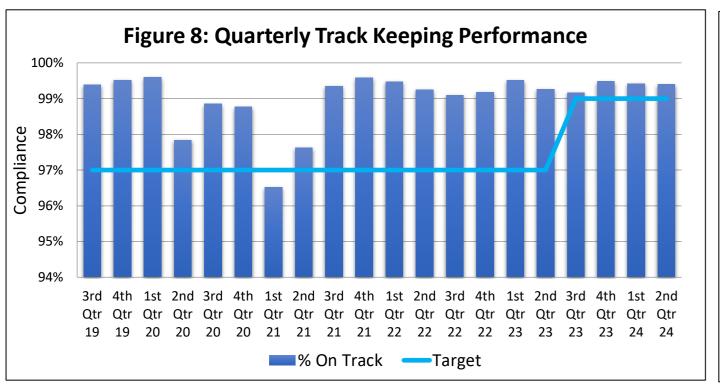

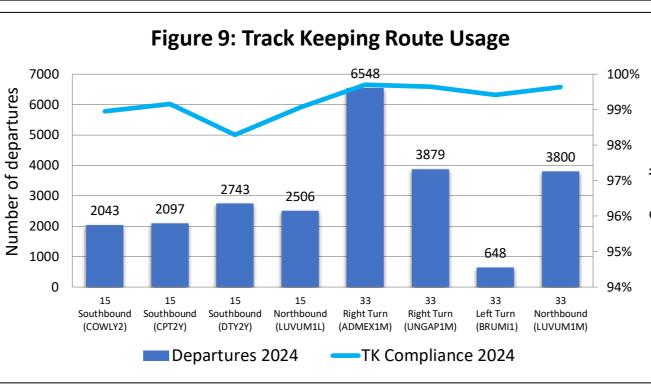

Noise Violations

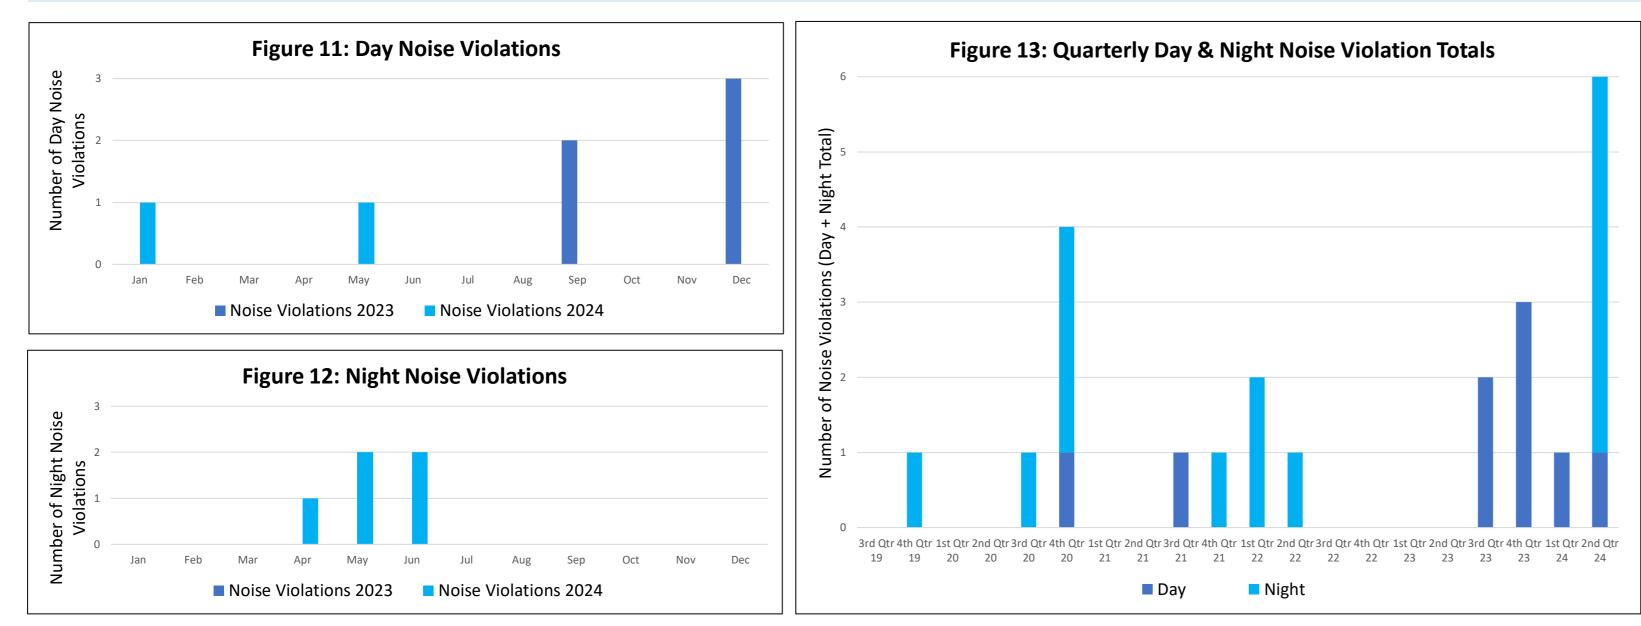


Figure 10 shows a map of the five noise preferential routes (NPR's) for departures in use at Birmingham Airport. The table below lists the altitudes up to which aircraft are required to stay within the noise preferential route, in order to be classed as 'on-track'. Once above the minimum vectoring altitude, air traffic control may provide pilots with vectors to facilitate a more direct path towards their destination.


Figure 6 shows the overall departure track keeping compliance for 2024 vs 2023. Track keeping compliance in Q2 2024 remained in excess of 99% in each month.

Figure 7 shows rolling track keeping compliance by runway, with a marginal difference between R33 and R15, with track keeping compliance higher for operations departing from Runway 33. This is due to there being more total departures off R33, as seen in the Runway Statistics section of this report.

Figure 8 shows quarterly track keeping performance vs target. Track keeping has exceeded 96% consistently since 2018 and has met target for all quarters except Q1 2021.It should be noted that from Q3 2023 the track keeping target has risen from 97% to 99%.

Figure 9 shows 2024 YTD route usage and the associated track-keeping compliance. Track keeping YTD was above 94% for all routes. The routes most utilised were R33 Right-turn (ADMEX1M/ UNGAP1M), R33 Northbound (LUVUM1L) and R15 Southbound (COWLY2, CPTY2, DTY2Y) consecutively.

Route	Minumum Vectoring Altitude			
15 Southbound (COWLY2, CPT27, DTY2Y)	4000 ft			
15 Northbound (LUVUM1L)	3000 ft			
33 Right Turn (ADMEX1M/UNGAP1M)	3000 ft			
33 Left Turn (BRUMI1)	3000 ft			
33 Northbound (LUVUM1M)	3000 ft			

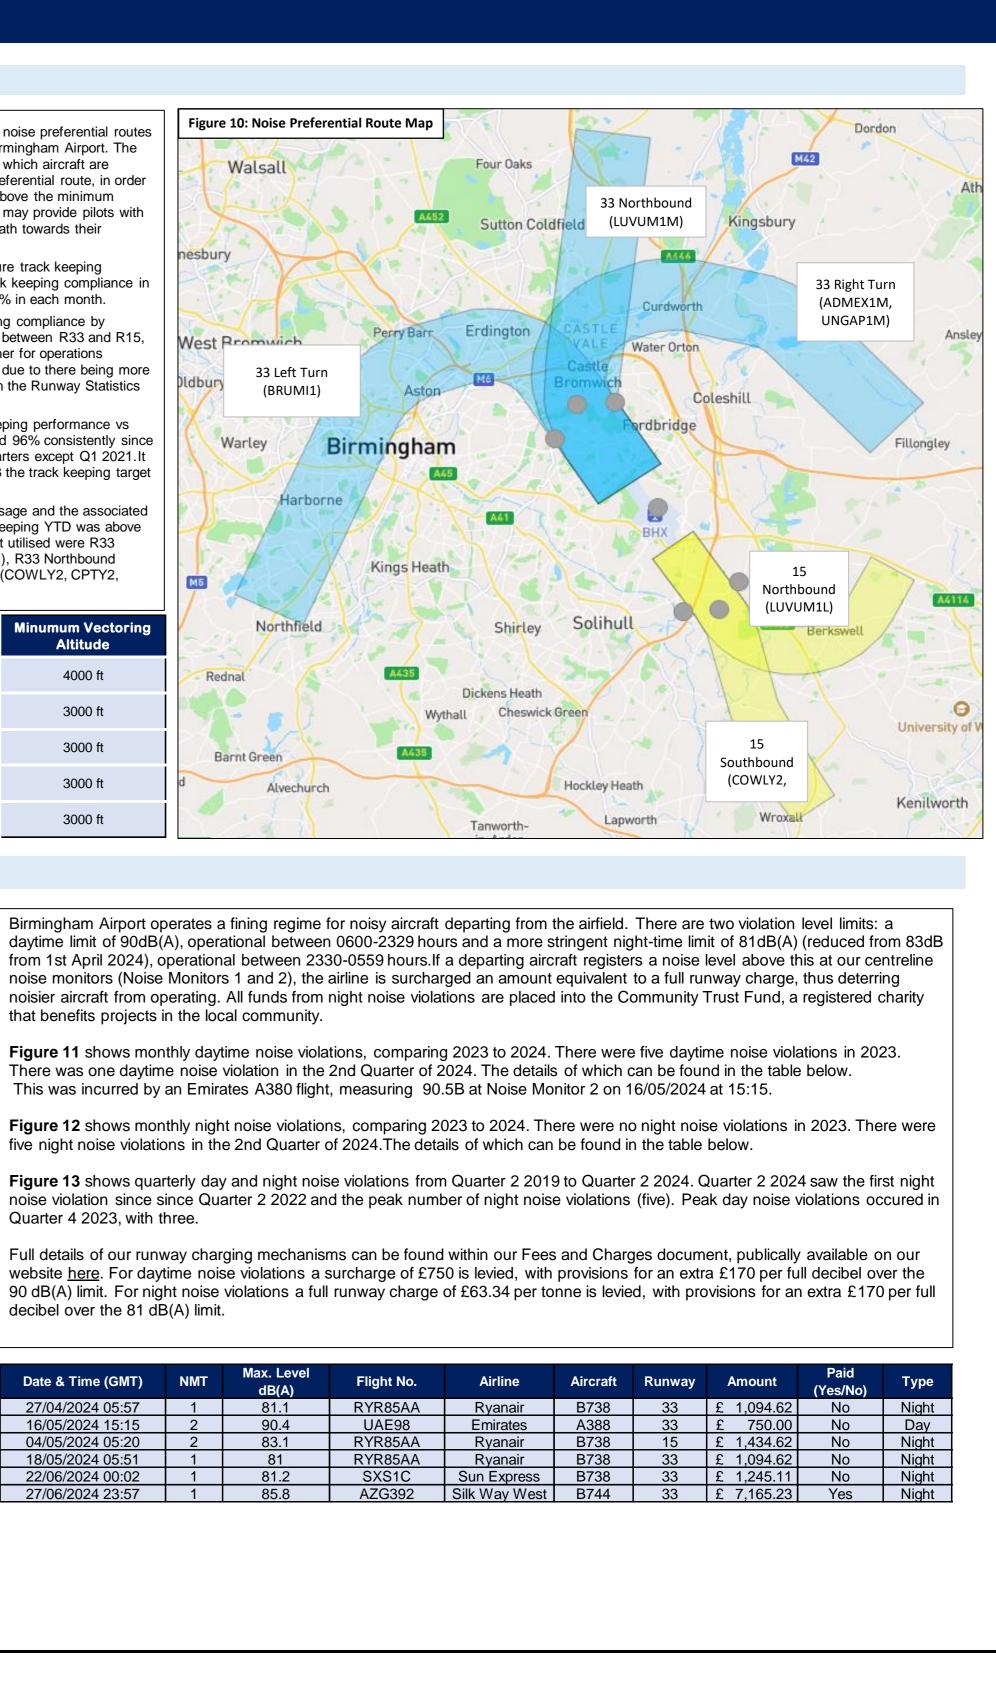



that benefits projects in the local community.

Quarter 4 2023, with three.

decibel over the 81 dB(A) limit.

Date & Time (GMT)	NMT	Max. Level dB(A)	Flight No.	Airl
27/04/2024 05:57	1	81.1	RYR85AA	Rya
16/05/2024 15:15	2	90.4	UAE98	Emir
04/05/2024 05:20	2	83.1	RYR85AA	Rya
18/05/2024 05:51	1	81	RYR85AA	Rya
22/06/2024 00:02	1	81.2	SXS1C	Sun E
27/06/2024 23:57	1	85.8	AZG392	Silk Wa

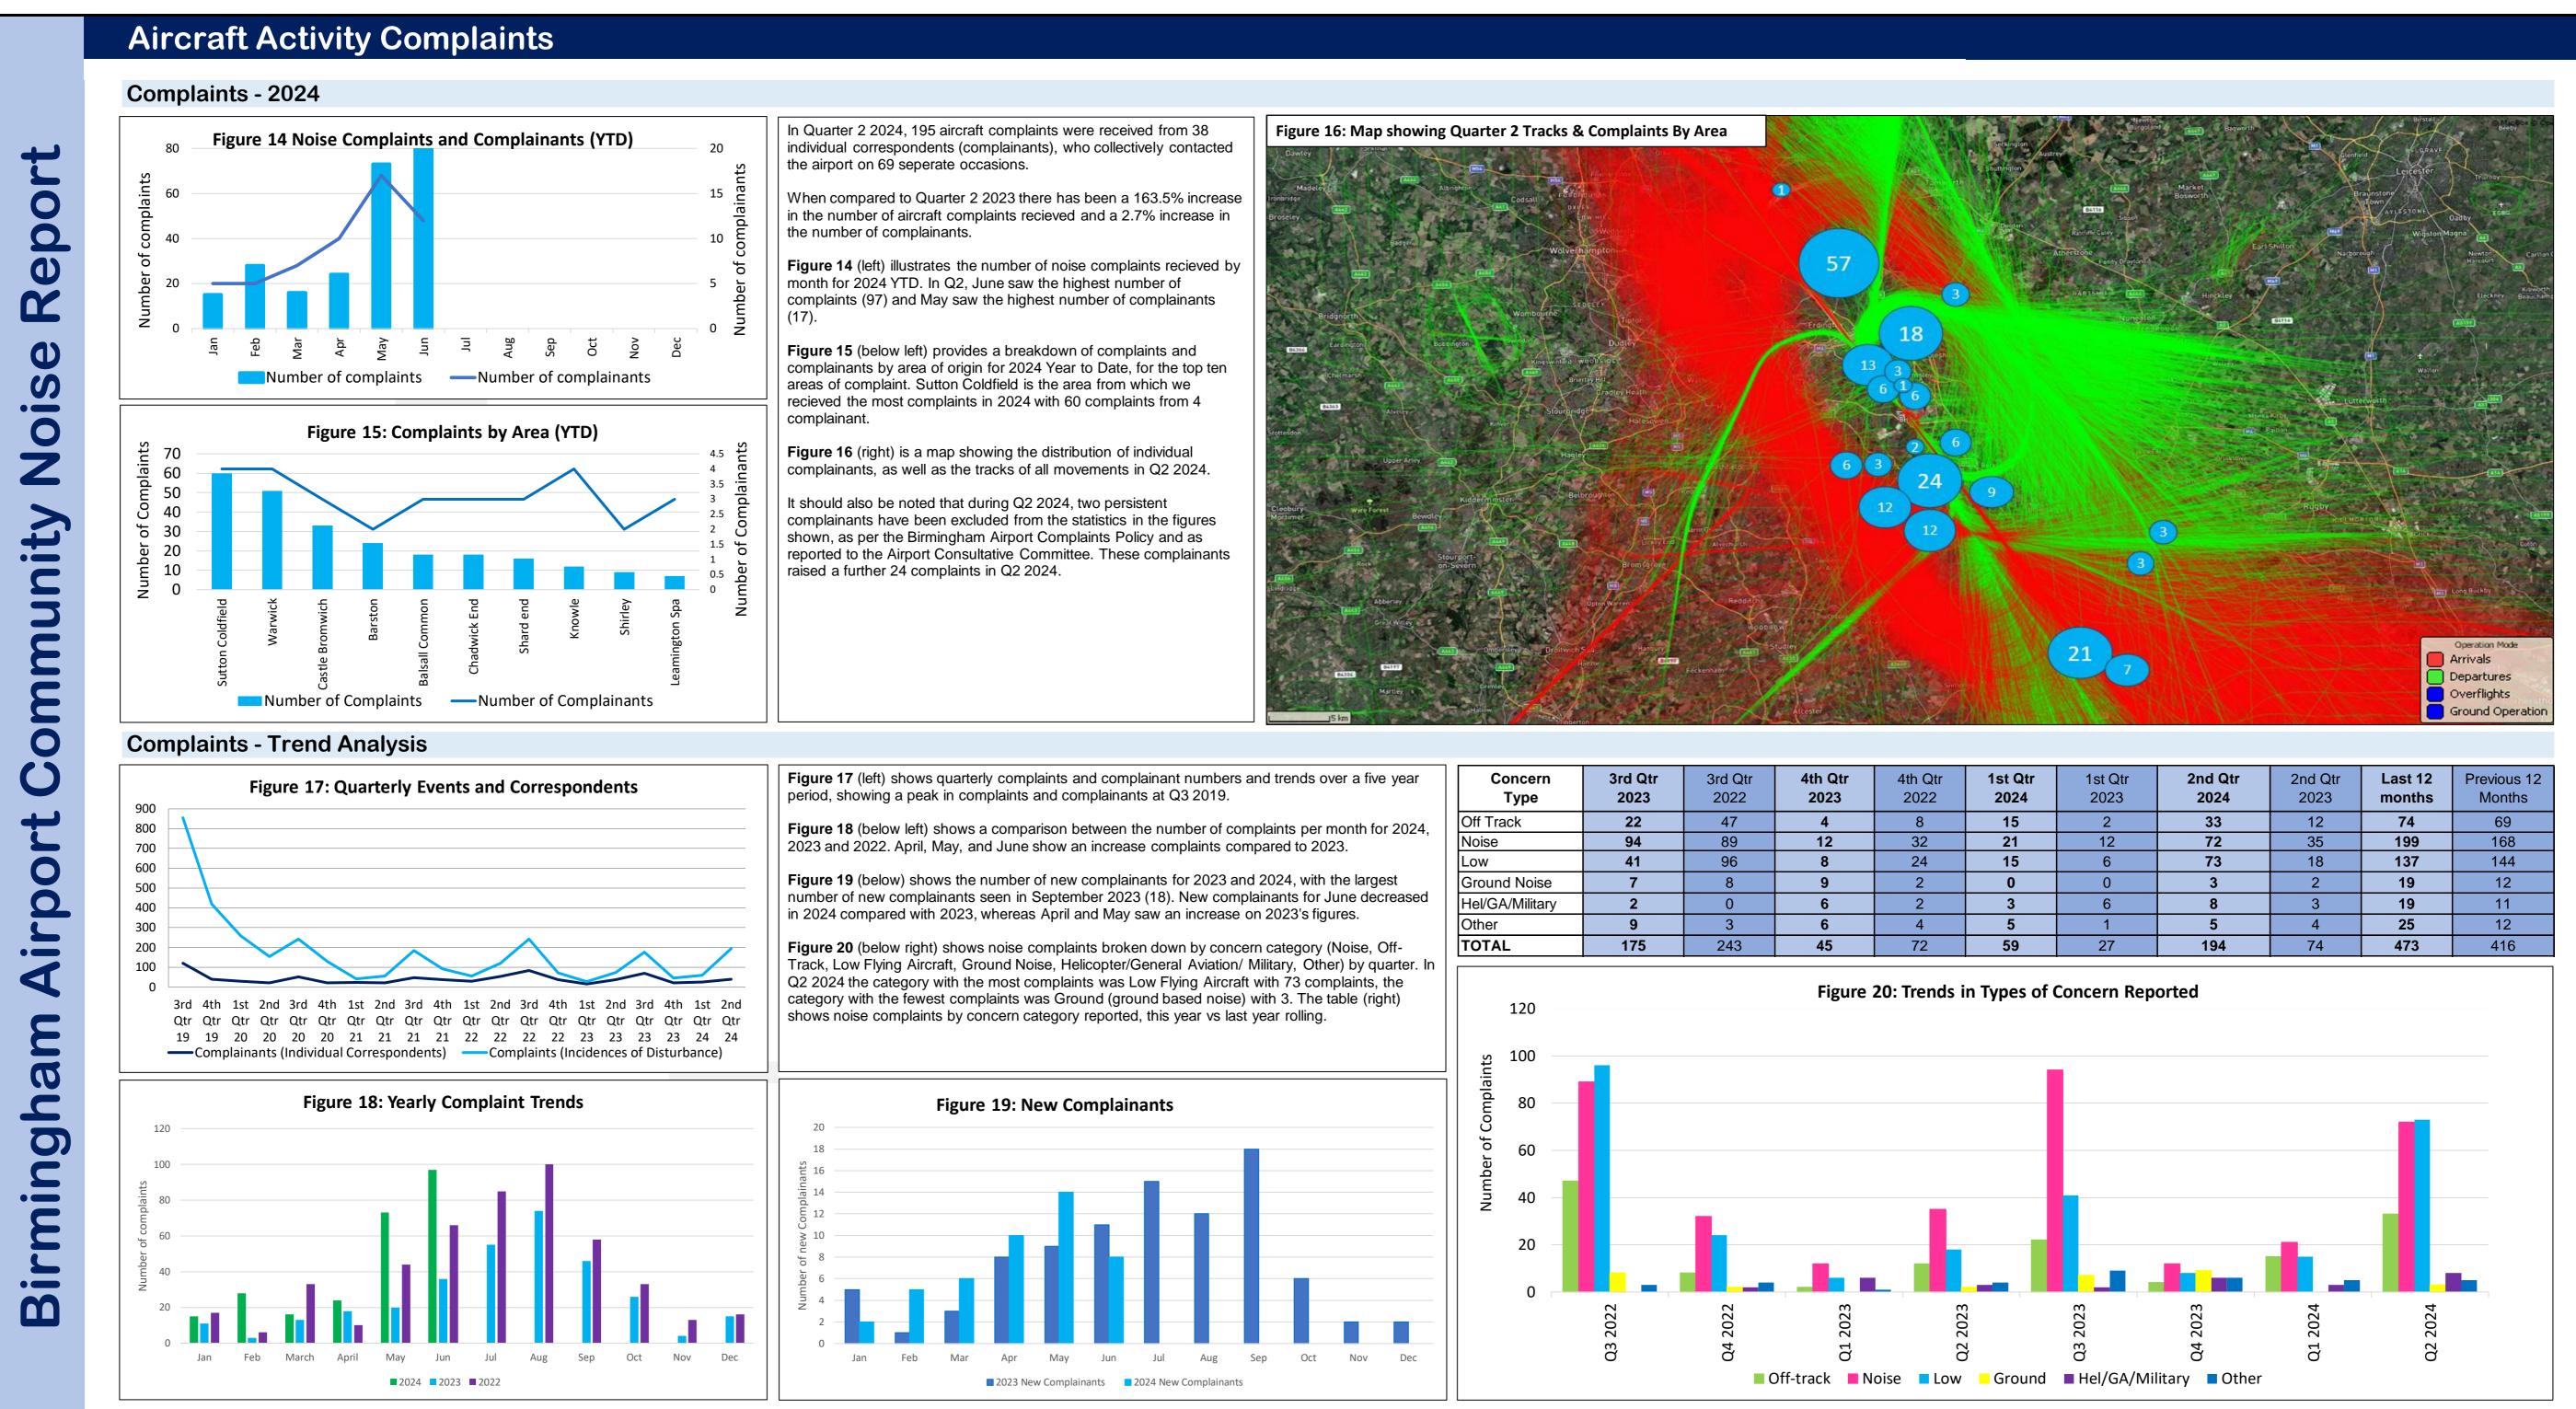

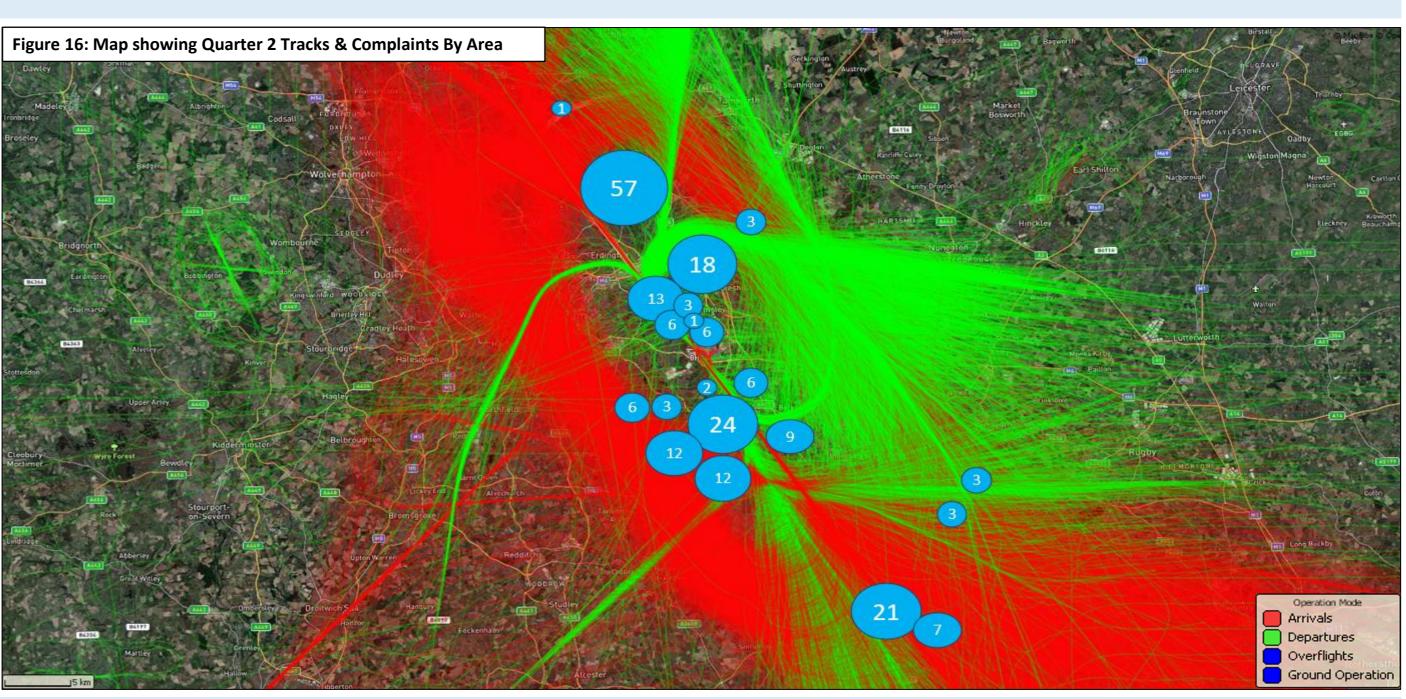


Concern Type	3rd Qtr 2023	3rd Qtr 2022	4th Qtr 2023	4th Qtr 2022	1st Qtr 2024	1st Qtr 2023	2nd Qtr 2024	2nd Qtr 2023	Last 12 months	Previous 12 Months
Off Track	22	47	4	8	15	2	33	12	74	69
Noise	94	89	12	32	21	12	72	35	199	168
Low	41	96	8	24	15	6	73	18	137	144
Ground Noise	7	8	9	2	0	0	3	2	19	12
Hel/GA/Military	2	0	6	2	3	6	8	3	19	11
Other	9	3	6	4	5	1	5	4	25	12
TOTAL	175	243	45	72	59	27	194	74	473	416


Airlines & Air Traffic

Airline Noise Performance

Rank by ATM	Airline Name	Total Movements	CDA Performance	Rank (CDA)	Track Keeping Performance	Rank (TK)
1	Ryanair	4690	97.73%	1	99.40%	6
2	Jet2.com	3904	96.77%	2	99.08%	10
3	TUI	2879	94.04%	7	99.44%	5
4	EasyJet	2699	92.95%	11	99.93%	2
5	Lufthansa	957	91.86%	14	99.37%	8
6	Emerald Airlines (UK)	876	92.03%	13	98.86%	14
7	KLM Royal Dutch Airlines	815	93.58%	8	99.70%	3
8	Air France	643	81.31%	20	99.38%	7
9	Loganair	598	85.28%	18	99.33%	9
10	TUI	554	96.39%	3	100.00%	1
11	EasyJet Europe	549	93.45%	9	100.00%	1
12	Emerald Airlines	431			11	
13	SunExpress	410	94.15%	6	6 99.51%	
14	Emirates	396	88.89%	15	98.99%	12
15	Eurowings	395	86.87%	17	98.98%	13
16	Turkish Airlines	380	95.79%	4	100.00%	1
17	Aer Lingus	324	87.65%	16	100.00%	1
18	Swiss	234	93.44%	10	100.00%	1
19	Qatar Airways	182	94.67%	5	100.00%	1
20	Wizz Air Malta	162	93.44%	10	100.00%	1

Runway Statistics

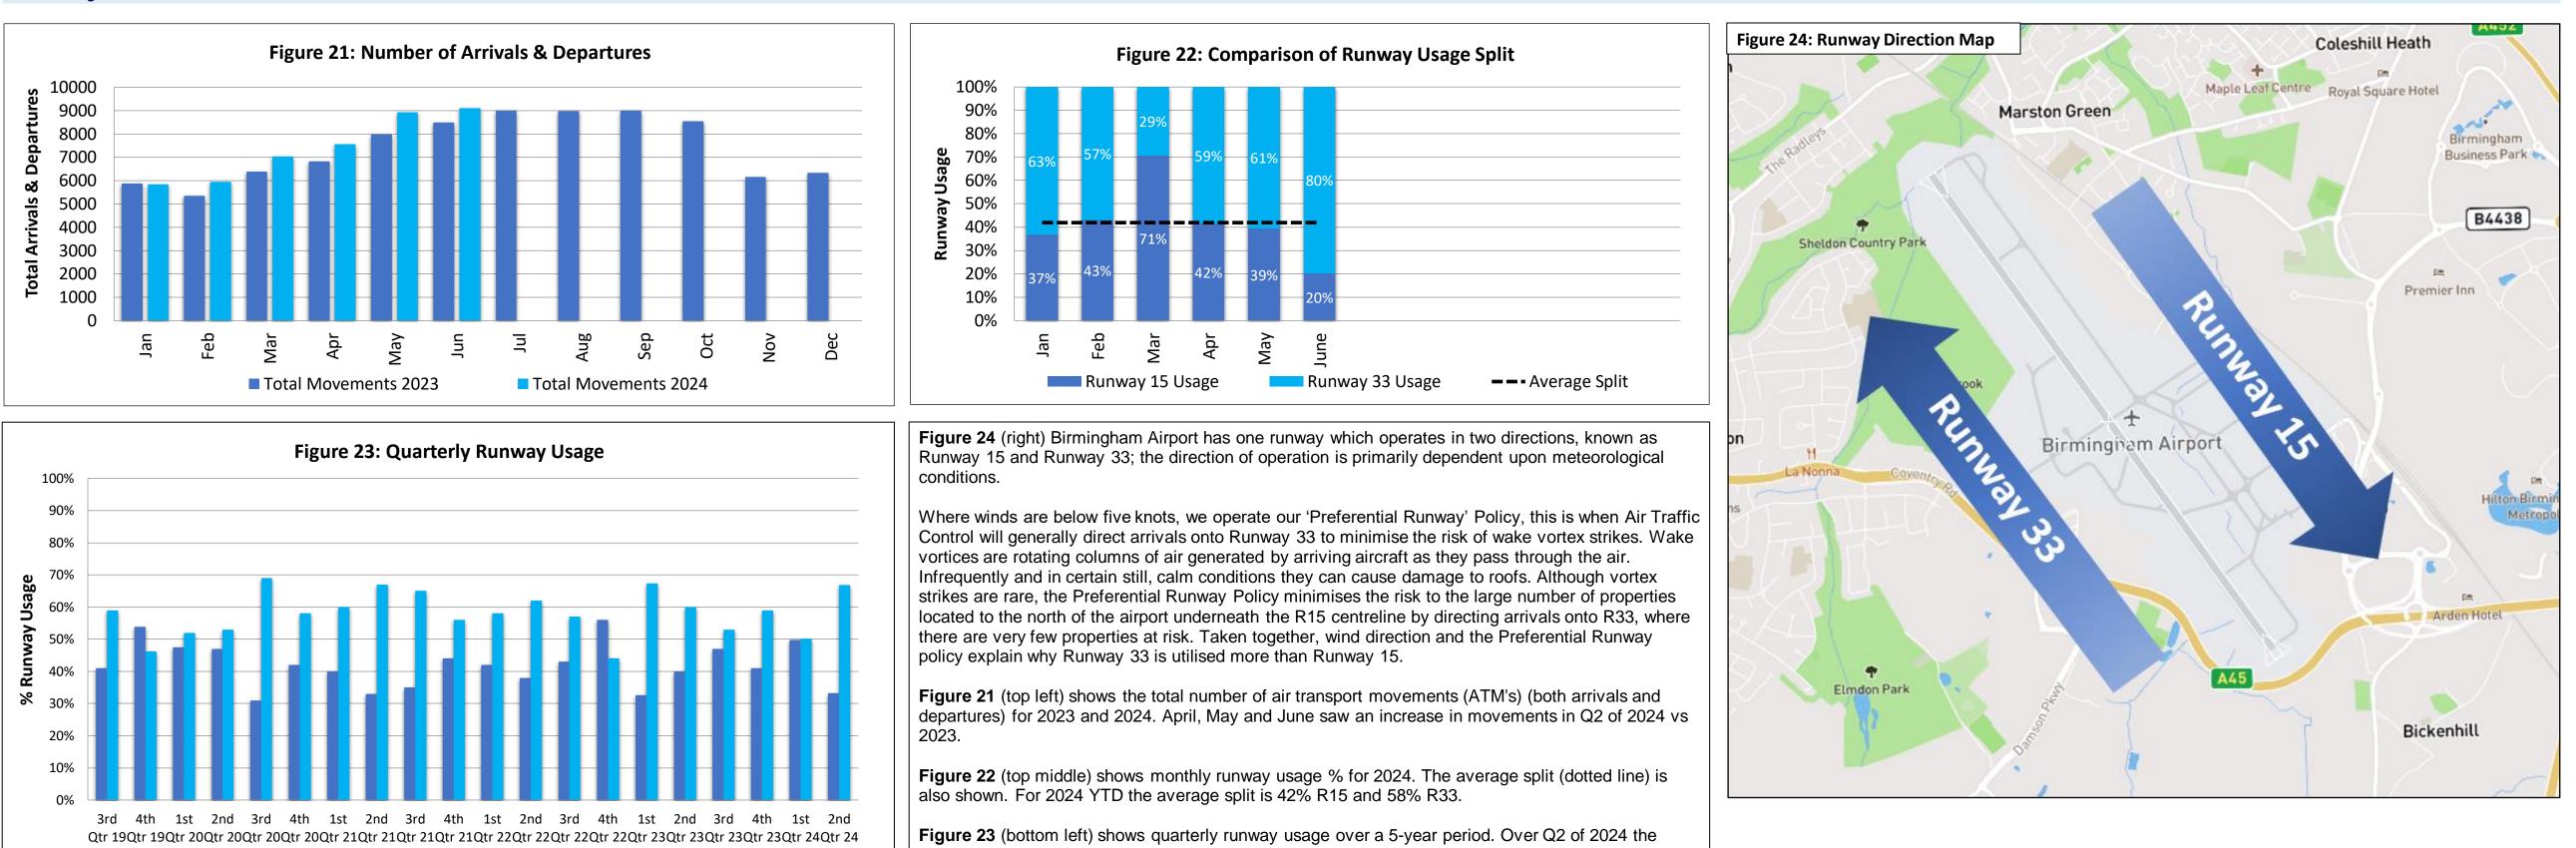

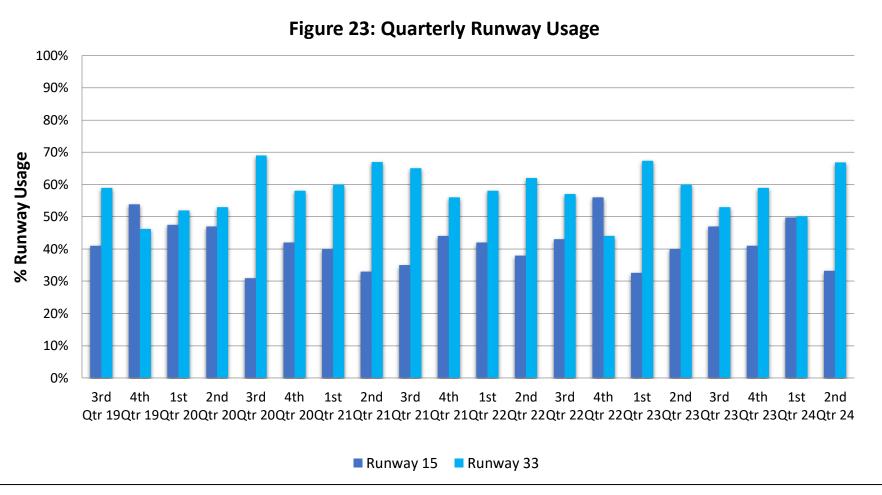

m

he table to the left shows airline noise performance for the top 20 airlines by total ATM's. Airlines are ranked by the number of movements for Q2 2024. The ranking within each metric is also presented.

he methodology used to calculate the two metrics that form the airline noise performance table are described below. In order to drive continuous improvement and to help showcase airline performance in elation to noise, this table has been developed and is presented to airlines on a quarterly basis through the Operation Pathfinder programme. In collaboration with airlines, we have identified operational netrics which are being monitored and reported against. These metric will develop over time in collaboration with the airlines. Please note, from Q3 2023 our track keeping target has been increased from 7% to 99%.

Continuous Descent Approaches (CDA) and Track Keeping (TK) are operational metrics. Airlines with more than ten movements per week during Q3 2023 are included in the ranking. Airlines with CDA or rack Keeping performance in green have met our CDA (96%) and Track Keeping (99%) targets. Airlines with CDA or Track Keeping performance in the red or amber range will be considered as a priority or engagement and we will work with them to improve their operational performance.

Continuous Descent Approaches (CDA) Performance is the first operational metric in the arline noise performance table and relates to the vertical profiles flown during arrival. CDA performance is equal to ne proportion of arrivals that meet the criteria for CDA, i.e., no level segment longer than 2.5 nautical miles below the altitude of 7,000ft. Continuous descent approaches reduce the noise impact because ney require significantly less engine thrust, which leads to reduced emissions of air pollutants and noise, with the aircraft staying higher for longer. Airport-wide CDA performance will also be presented eparately in this report.

AG definition: Green ≥ 96% 96% < Amber ≤ 85% Red < 85%


rack Keeping (TK) Performance Track keeping performance is the second operational metric in the airline noise performance table and applies to the lateral departure track. All departures are required to tay within the Noise Preferential Routes (NPRs) designed to take departing aircraft over the least populated areas. Track keeping performance is equal to the proportion of departures that stay within the IPRs until they reach the required altitude of 3,000ft or 4,000ft depending on the route. Airport-wide Track Keeping performance is also presented separately in this report.

AG definition: Green ≥ 99% 99% < Amber ≤ 95% Red < 95%

average runway split is 33% R15 and 67% R33. The number of Air Traffic Movements (ATMs) by runway for the 2nd Qtr 2024 was 8,493 ATMs on Runway 15 and 17,102 ATMs on Runway 33.

Arrivals Performance + Helicopters


Continuous Descent Approaches (CDA)

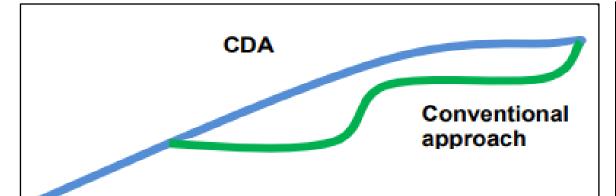

Aircraft operate a Continuous Descent Approach (CDA) staying higher for longer, by descending at a continuous rate. CDAs require less engine thrust, reducing air pollutant and noise emissions. CDA compliance in Q2 2024 varied with 92% compliance in April, 94% in May and 93% in June/as shown in Figure 25 (Left). The month of June saw an increase of 1% in compliance when compared with 2023, April and May saw no change in percentage compliance when compared with 2023. The Sustainability Team continues engage with airlines through the Operation Pathfinder Forum to drive improvement in both arrivals and departure performance.

Figure 26 (bottom-centre) provides a breakdown of CDA performance by Runway for 2024. Runway 33 arrivals had a higher degree of compliance than that of Runway 15 arrivals in the second quarter 2024.

Figure 27 (bottom-right) shows CDA performance by guarter dating back to the third guarter of 2019. Compliance in the 2nd Quarter of 2024 remained the same as that in the 1st Quarter of 2024.

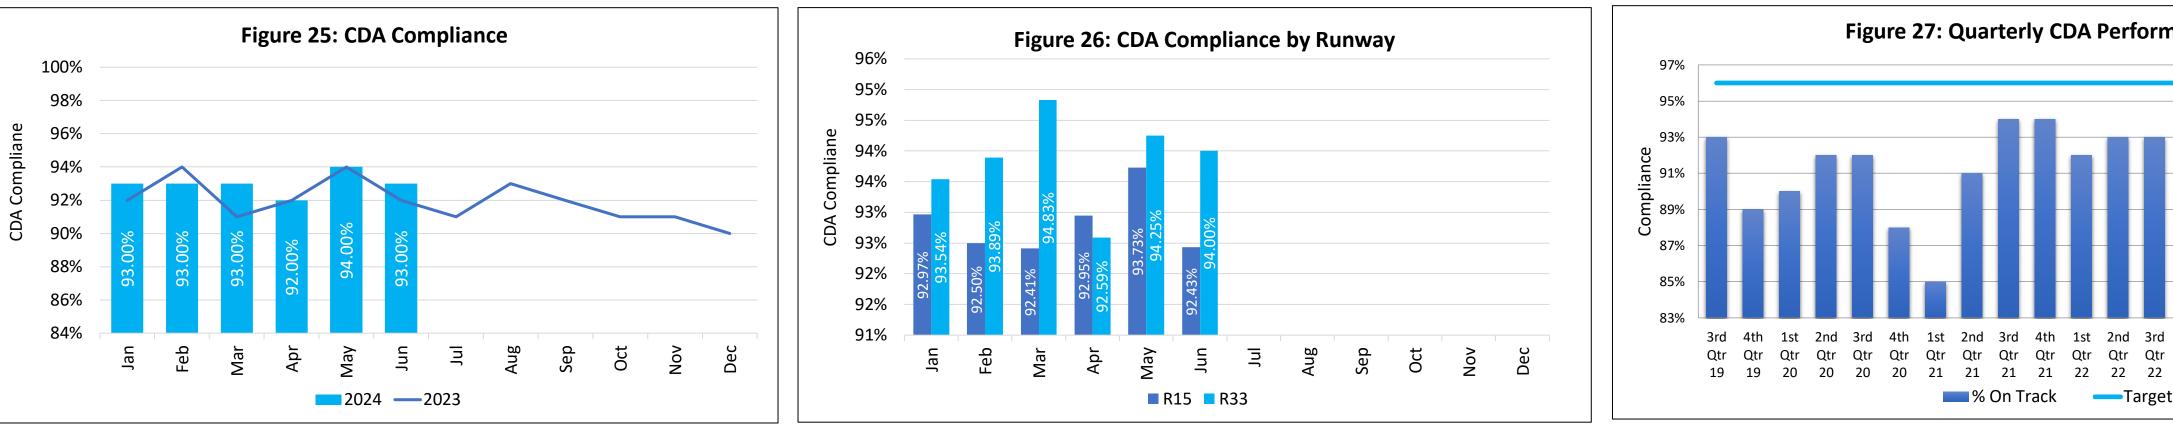

Helicopter Movements

Although helicopters have no set routes that they are required to follow, in recognition of the community sensitivity around helicopter noise BAL has implement a noise abatement policy for helicopter operations. This policy states that 'Helicopters should, except in the case of an emergency, avoid overflying the noise sensitive area at less than 500 feet AAL (Above Aerodrome Level). This area extends between 230° and 290° from the Western end of stand 506, to a distance of 0.5 NM' and covers the area of Elmdon and parts of Sheldon. Helicopters are also required to abide by the low flying rules, which require the helicopter to operate at a minimum height of 500 feet for rural areas and 1500 feet for built up areas. Exceptions to low flying rules do apply, including upon landing or take-off, utility network surveys and police helicopter movements.

Figure 29 shows quarterly helicopter movements since the third quarter of 2021, with a breakdown of the split between those within the night period (23:30-06:00) and those within the daytime (06:00-23:30). The second guarter of 2023 saw the highest number of helicopter operations with 304 in the day and 118 at night.

Figure 30 shows a breakdown of quarter 2 2024 helicopter movements by category. Private Ownership accounted for the largest proportion of movements with 60% of all helicopter operations.

The below table shows a summary of total helicopter ATM's by category and calendar year, from 2019 to 2024 YTD. Data shows that from 2019 to 2022 the most notable increase (98%) is in police helicopter operations. The Birmingham National Police Air Service (NPAS) have commented that 'Each flight conducted is due to an operational policing need to support and assist the public to combat crime or assist with saving life in finding vulnerable people. Members of the Police Helicopter Unit are indeed mindful that their operations can have an impact on local communities.' Police helicopter movements

Operation Category	Year							
	2019	2020	2021	2022	2023			
Air Ambulance	4	2	2	1	5			
Military	6	1	2	12	2			
Training & Engineering	4	4	6	8	5			
Search & Rescue	0	0	0	6	22			
Diplays and Events	0	0	1	3	4			
Pipeline Surveying	30	11	5	12	24			
Police	574	685	774	1158	863			
Private Charter	18	2	15	18	28			
Private Owner	229	151	259	254	286			
Total	865	856	1064	1472	1239			

