

Gladius GT-500

5" Rugged Android™ Handheld Device with LTE solution



MEDIATEK

Features

- Support Android 7.0
- Quad-core ARM Cortex-A53 1.3GHz
- Multiple connectivity including WLAN, WWAN, Bluetooth, NFC and 2G/3G/LTE
- WorldMode modem capability (supporting FDD/TDD-LTE, WCDMA, CDMA2000 1xEV-DO and GSM/GPRS/EDGE)
- IP67 rated water and dust resistance
- Drop proof: up to 1.5m
- Accelerometer, magnetometer, gyroscope, light sensor, GPS & barometer
- Built-in 1D/2D barcode reader
- Supports Node-Watch for unified mobile devices management

System

CPU	Quad Core ARM Cortex-A53 1.3GHz
OS	Android 7.0
Memory	2GB LPDDR2
Storage	16 GB eMMC
Audio	1 x built-in microphone
	1 x built-in speaker (0.5W)
	1 x 3.5mm stereo headphone/microphone combo jack
	FM radio

Peripherals and Devices

Camera	Front: 2.0 megapixel camera
	Rear: 13.0 megapixel camera with Auto-Focus and Flashlight
	Accelerometer (G-sensor)
	Gyroscope
	Barometer
	Proximity sensor
NFC	Ambient light sensor
	Yes
WLAN	Integrated Wi-Fi 802.11a/b/g/n
Bluetooth	Integrated Bluetooth 4.1 (BLE, HS compliant)
WWAN	2G GSM/GPRS/EDGE (Band 850/900/1800/1900)
	3G WCDMA (Band 1,2,5,8)
	3G CDMA2000 (BC0/BC1)
	4G FDD+TDD (Band1,3,5,7,8,20,38,39,40,41) 4G DRX (Band1,3,5,7,8,20,38,39,40,41)
Navigation	GPS/Beidou
	GPS/Glonass (optional)
Barcode Scanner	1D/2D barcode reader with physical trigger buttons
I/O Interface	
USB Port	1 x Micro USB 2.0 port (OTG compatible)
SD Slot	1 x microSD card slot (up to 32G)
SIM Socket	1 x micro-SIM (3FF) socket supporting 2G/3G/LTE
	1 x micro-SIM (3FF) socket supporting 2G only

LCD Display

Size/Type	5" TFT LCD
Resolution	720(W) x 1280(H)
Brightness	500 nits

Touch Screen

Type	5-Point Projected Capacitive Multi-Touch screen
------	---

Power Supply

Battery Type	Lithium-ion rechargeable battery
	Customer replaceable (for maintenance)
Battery Capacity	4800mAh
Adapter Input	AC100~240C, 50~60 Hz
Adapter Output	5V/2A (10W)

Mechanical & Environmental


Ingress Protection	IP67, up to 1.5m drop resistance.
Operating Temp.	-10°C ~ 50°C (14°F ~ 122°F)
Storage Temp.	-20°C ~ 60°C (-4°F ~ 140°F)
Operating Humidity	5~95% RH
Dimensions (W x H x D)	86 x 165.8 x 25.6mm (3.39" x 6.53 x 1.01")
Weight	Approx. 385g (0.85lb) (with battery)

Ordering Information

GT-500	5" Android™ Rugged Handheld Device with Quad-core Processor and Front & Rear Camera
GT-500-2D	5" Android™ Rugged Handheld Device with Quad-core Processor, Front & Rear Camera and 1D/2D Barcode Scanner



Dimensions

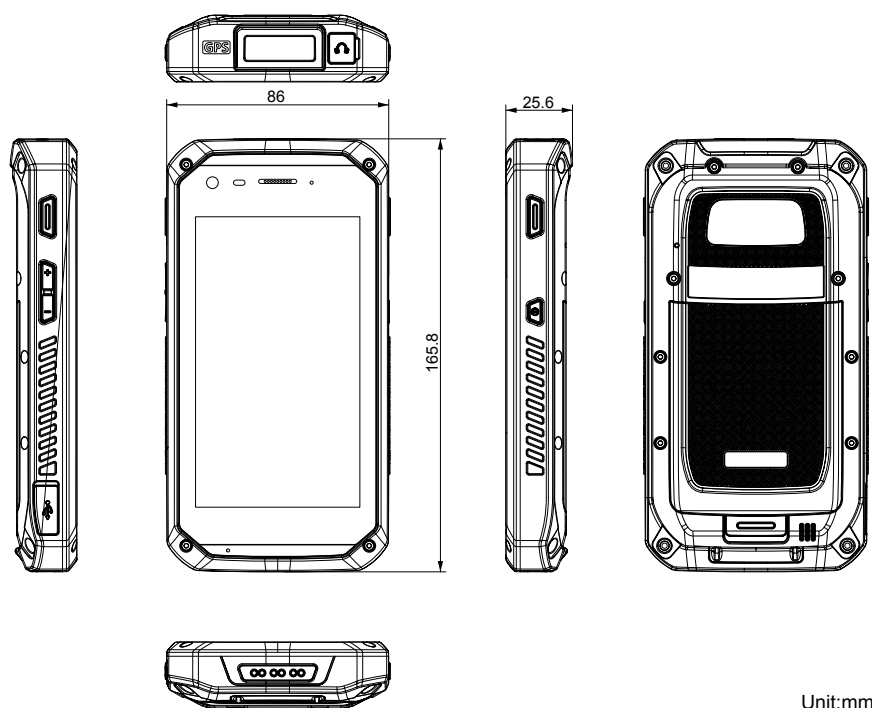

Unit:mm

Standard Accessories

Micro USB Cable	
Rechargeable Li-ion battery pack (pre-installed)	
User Manual	

Optional Accessories

Power Adapter	Universal power adapter, 5V/2A	
Hand Strap	165(L) x 40(W)mm handstrap	
Battery Charger	4-in-1 battery charger	
Cradle	Desktop cradle	
Pistol Grip	Pistol grip	
UHF Reader	Pistol grip with UHF RFID scanner	