atelje Lyktan

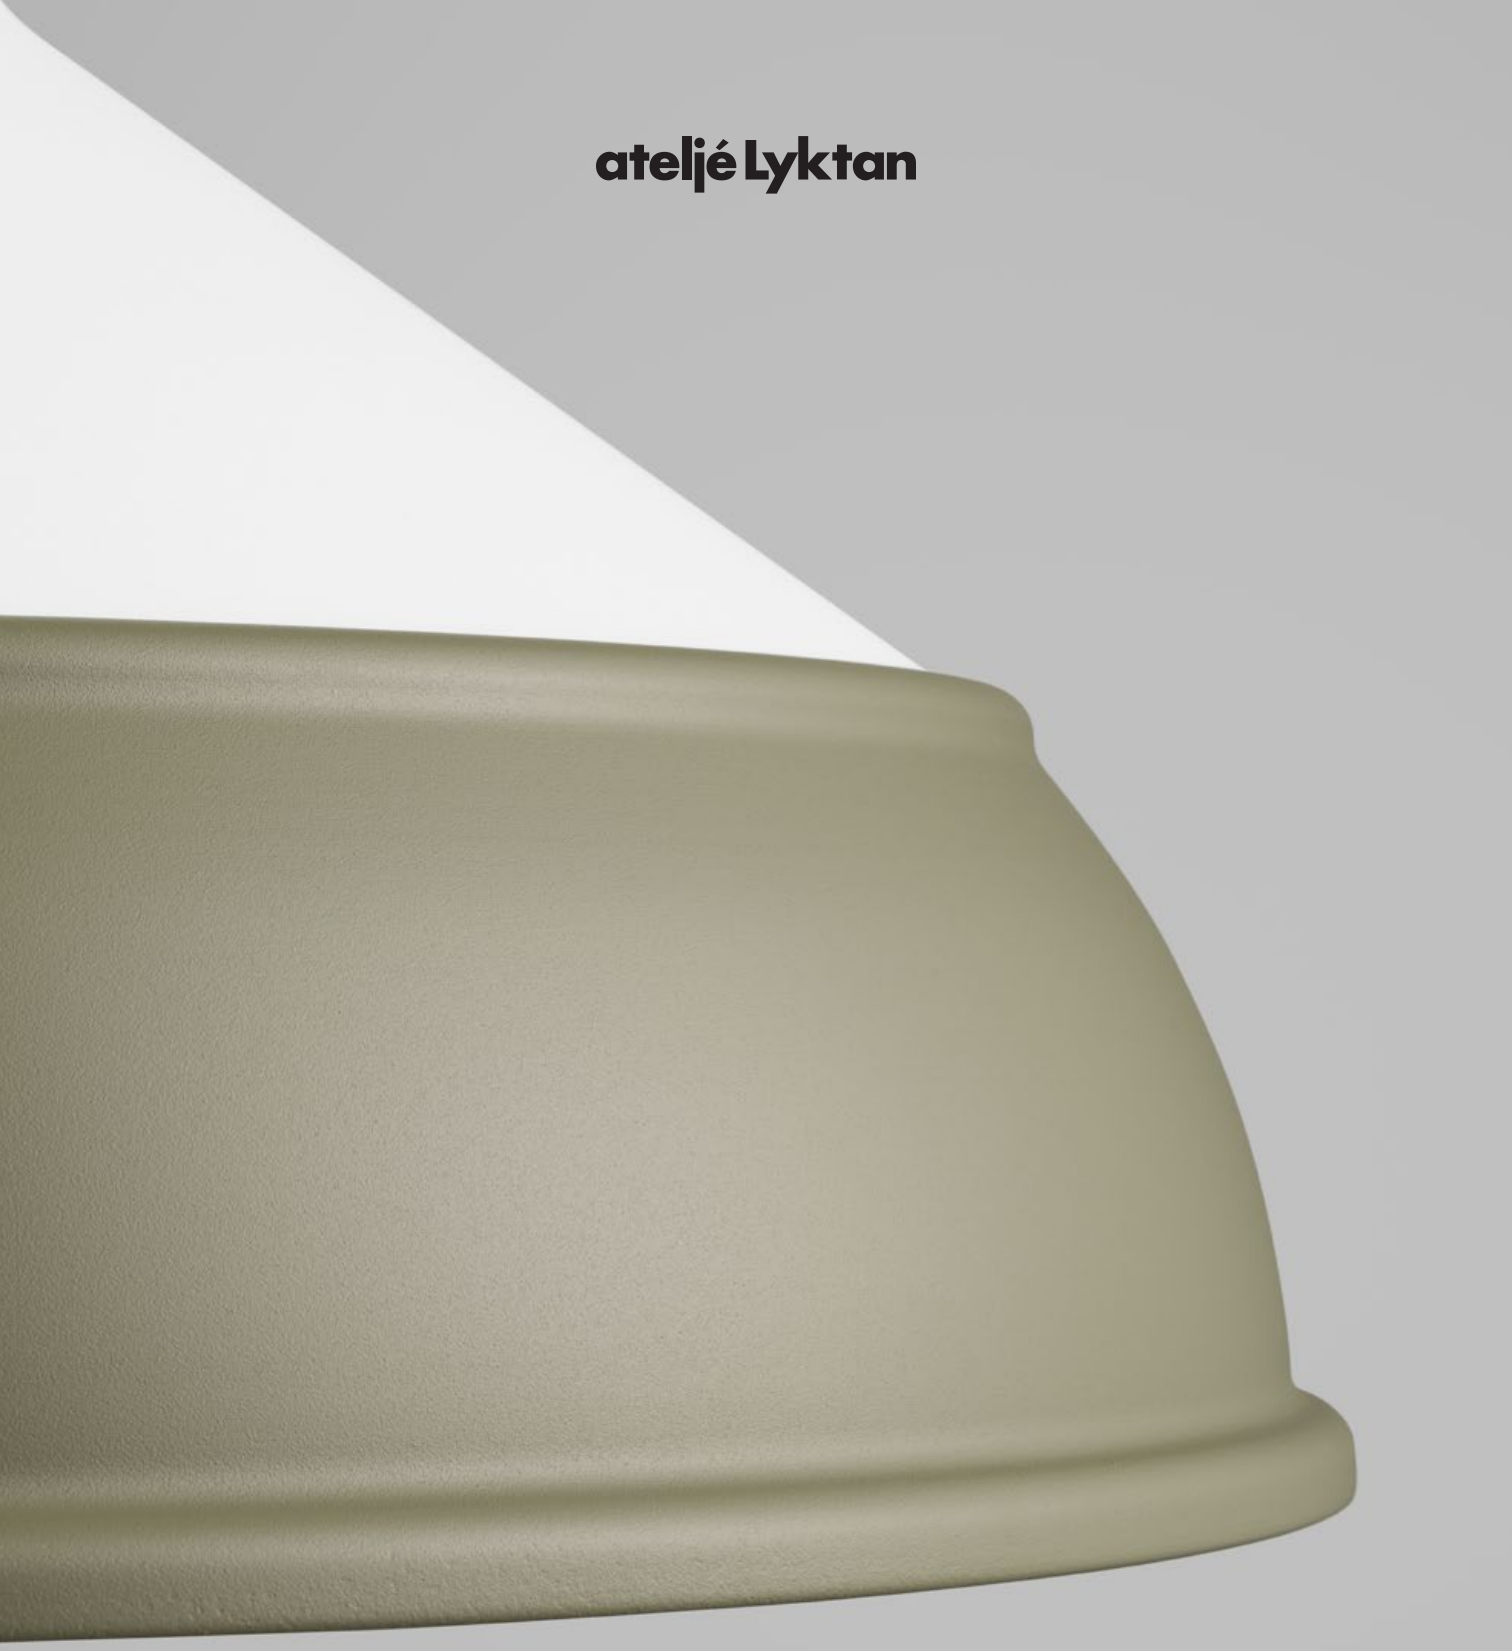

WORKER

Design by Joel Karlsson, Krook & Tjäder Design

Practical lighting in a characteristic form

“Worker seems to fit well in the category of archetypal designs,” says Joel Karlsson at Krook & Tjäder Design, who in designing Worker, had succeeded in meeting the huge challenge of combining practical lighting with a characteristic form.

Joel believes the homely style adopted in many activity-based offices provides less effective lighting for a work environment. Worker has therefore been equipped with a downward facing light with a decorative effect, emphasising the luminaire’s beauty while providing a nice lighting effect. All this, combination with a fairly closed archetypal design.



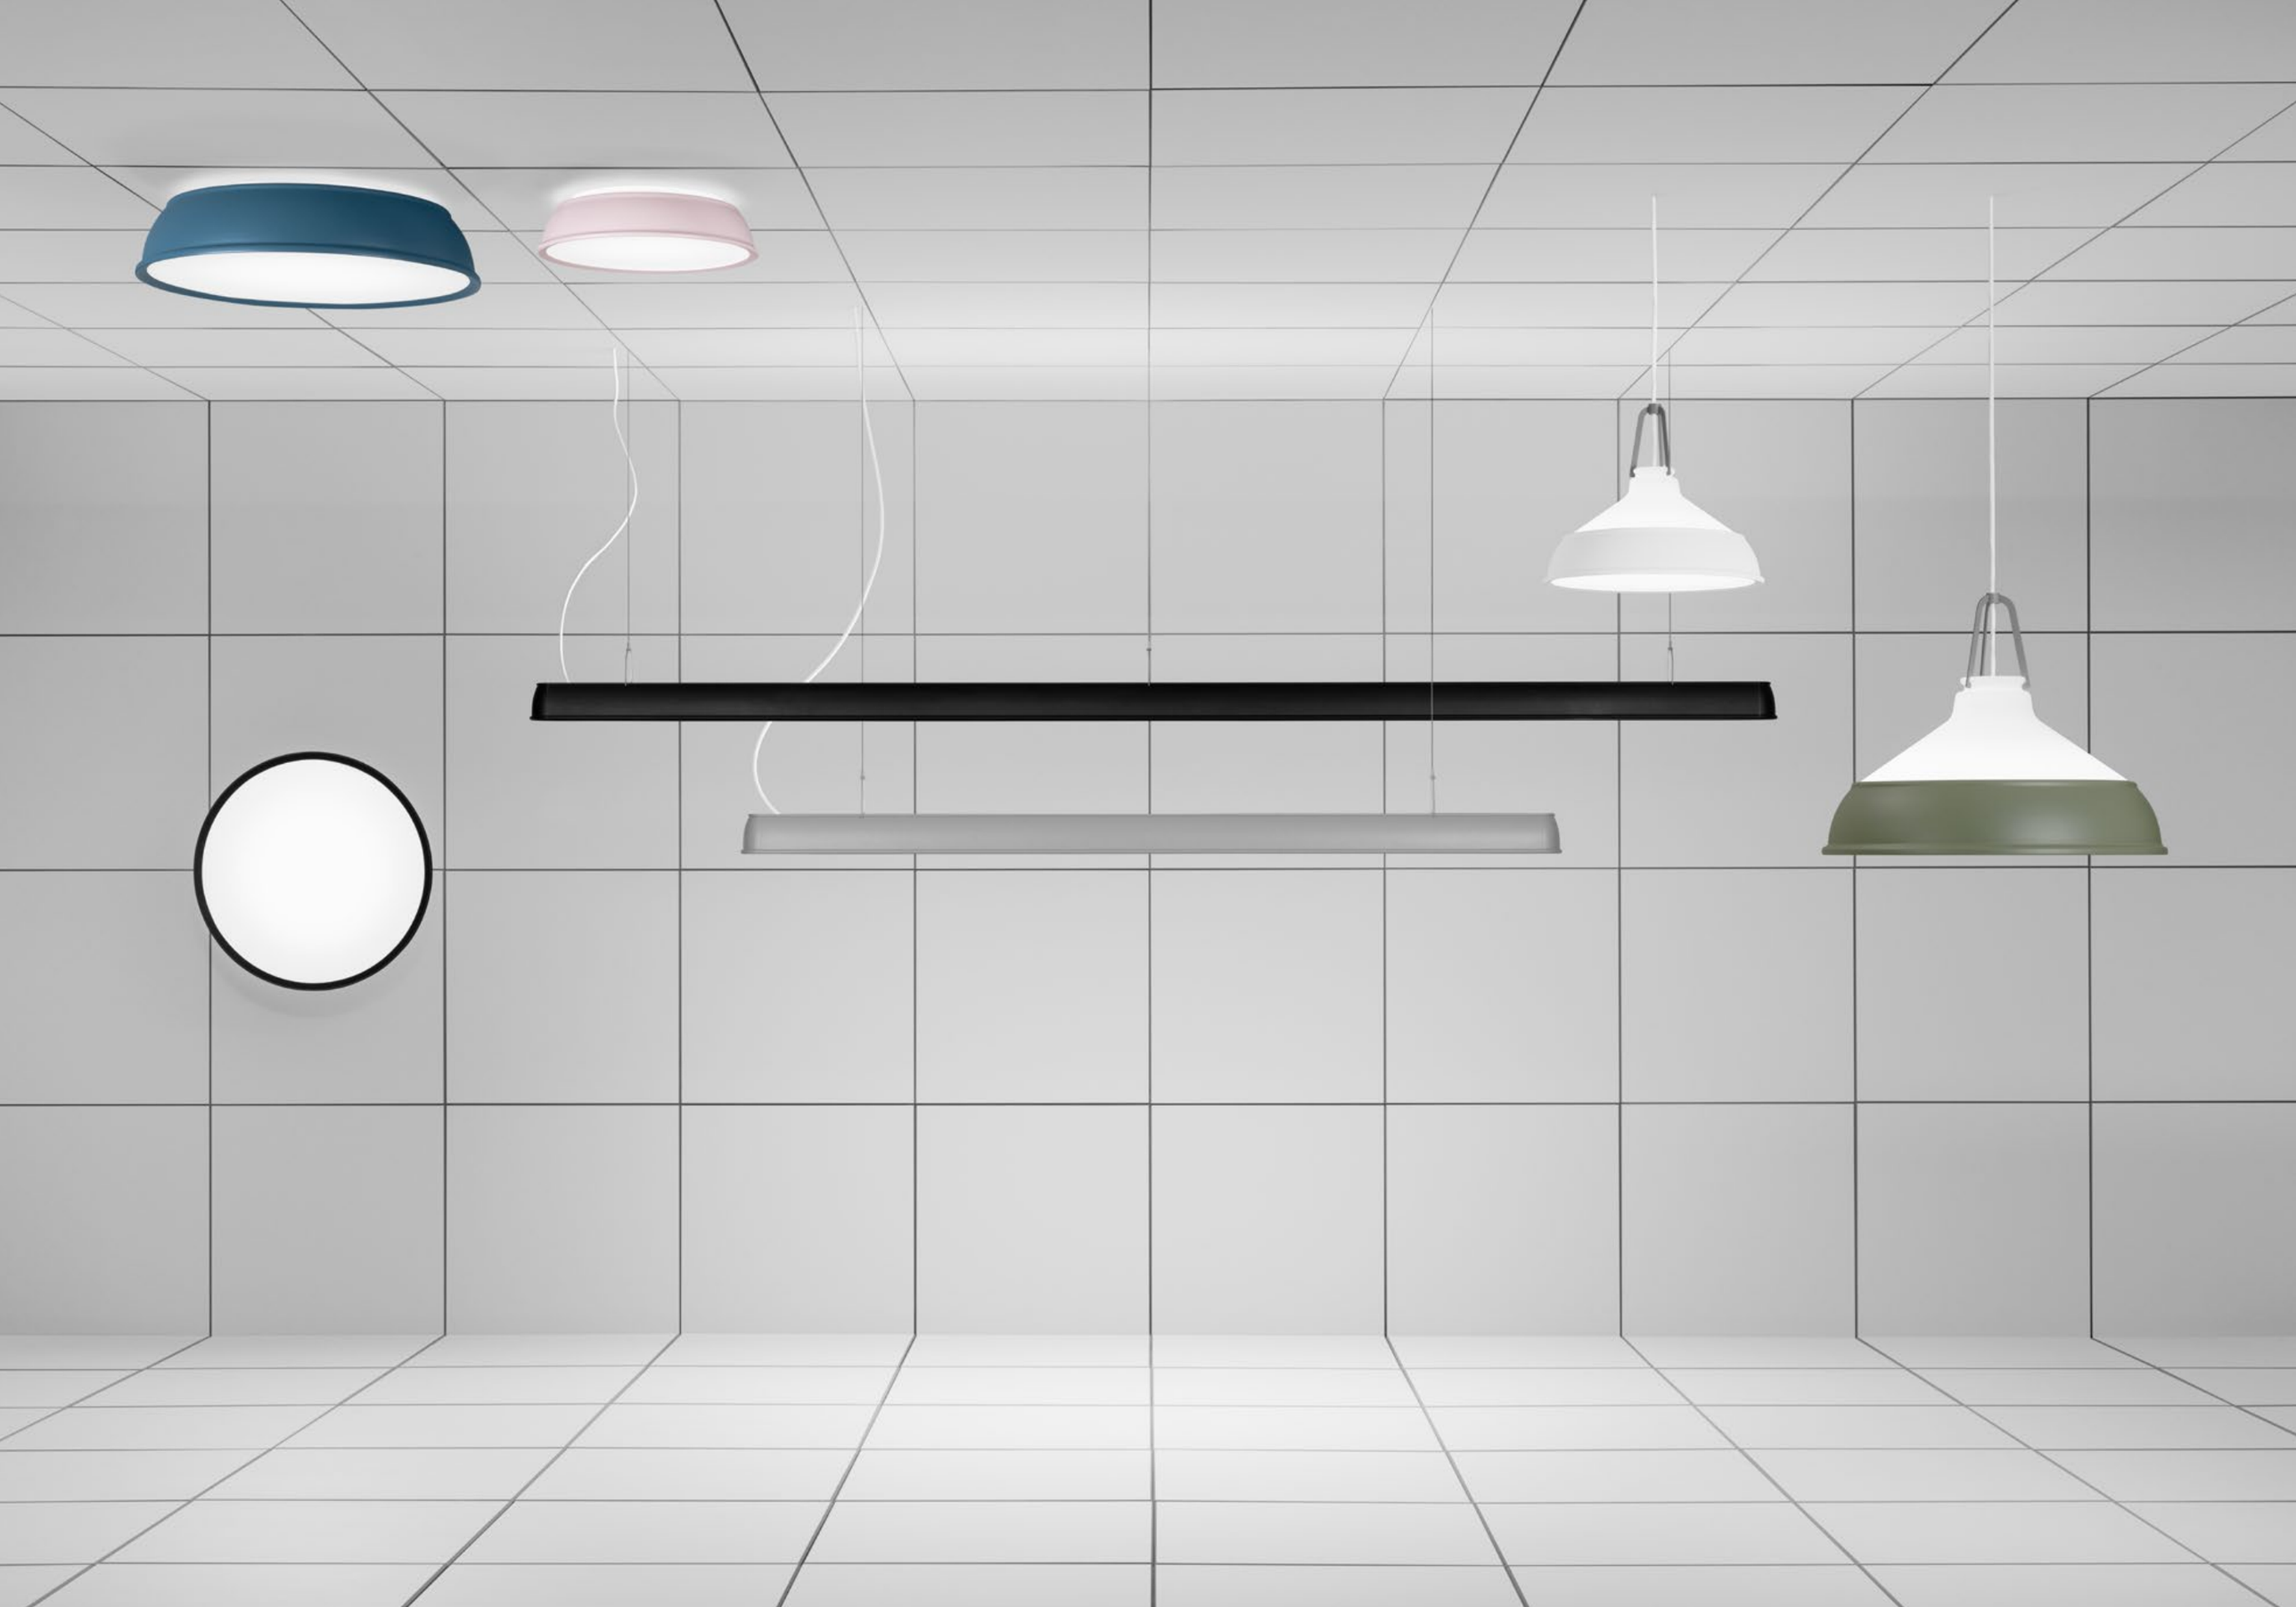













Standard finish

White
NCS S0500-N

Black
RAL9005

Dusty blue
NCS S6020-B

Dusty pink
NCS S1515-R

Dusty green
NCS S6010-G70Y

Grey
NCS S5502-Y

Optional colours

Salmon pink
NCS S2040-Y80R

Turquoise
NCS S3030-B30G

Dusty purple
NCS S5040-R30B

Champagne
NCS S 3030-Y20R



Product information

	Ø400: Equipped with latest generation LED module and driver from Tridonic. Ø600: Equipped with latest generation LED modules from Cree.
Material	Supporting base in cast aluminium. Shade in opal acrylic and aluminium.
Installation	Suspended in 3 m textile cable with support wire. Worker in black version comes with black textile cable. Other colors are supplied with white textile cable.
Connection	Terminal block in canopy, 3x2,5mm², dim: 5x2,5mm².
Diffuser	Opal acrylic glass or microprismatic acrylic glass combined with optical film from BrightView.
Light source	Incl. LED light source, colour temperature 3000K or 4000K. Worker 400: Colour rendering CRI 80. Chromaticity tolerance max 3 SDCM. Life span: L80B50 50 000h. Worker 600: Colour rendering CRI 80 & 90. Chromaticity tolerance max 3 SDCM. Life span: L90B10 50 000h. Worker with opal acrylic glass can be supplied with up to 4700 lm via programming of ballast.
Driver	Equipped with On/Off-driver or DSI/DALI driver with light regulation 1-100%. Programmed light level saved even after power cut. Possibility of SwitchDim and CorridorFunction. 1 driver/DALI-address per luminaire. 100 000h.
Weight	Worker 400: 2.5 kg. Worker 600: 4.7 kg.
Measure (mm)	Ø400xH321 / Ø600xH467
Article no. (etc.)	www.atelje-lyktan.com





ateljé Lyktan

HEAD OFFICE
Fyrvaktaregatan 7, SE-296 81 Åhus
+46 (0)44 28 98 00, info@ateljelyktan.se

OFFICES
> Hesselmans Torg 9, 131 54 Nacka
> Fabriksgatan 7, 412 50 Göteborg
> Slussgatan 10, 211 30 Malmö
> Västra Varvsgatan 3, 972 36 Luleå
> 33-34 Dolben Street, GB-SE1 0UQ London
> Strandveien 30, Pb 471, N-1327 Lysaker
> Mannerheimintie 113, FI-00280 Helsinki
> Leninskaya Sloboda str. 26, bld. C, office 418, RU-115280 Moscow
> Axelsestraat 49, NL-4543 CD Zaamslag
> 25 Tagore Lane #03-10, Singapore G Building, Singapore 787602

www.atelje-lyktan.com