



Features & specification

The Esprit Eco² combination boiler is available in outputs of 24, 30 and 35 kW providing a cost effective heating solution for a range of domestic installations.

Complete with domestic hot water temperature controls including a switched preheat function, mechanical built-in timer and a digital operating status & diagnostic display, the Esprit Eco² provides reliable control of the homes heating and hot water performance.

- Quick and easy to install
- Low lift weight
- Compact cupboard fit
- Easy access to all components
- Tried and tested technology (including Grundfos pump)
- Fast fix flue turret connections
- Mechanical timer in-built as standard
- Easy to read pressure gauge
- Digital operating & diagnostic display
- Boiler frost protection included
- OpenTherm wiring for enhanced load compensation
- Ideal OpenTherm wired room thermostat available for Boiler Plus compliance
- Pump/diverter valve exercise & anti-cycling functions
- Fast hot water response through DHW preheat
- Made in the UK
- Fully supported by Ideal Service Division

Clearances & dimensions

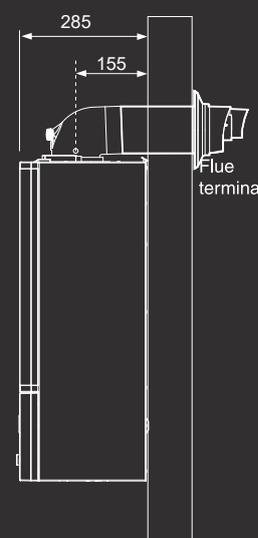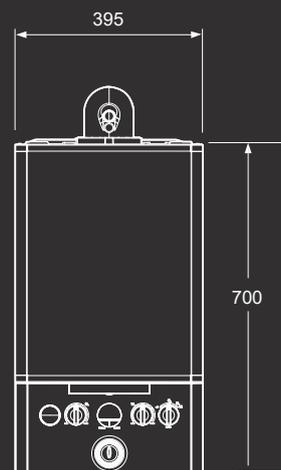

Dimensions in mm.

Technical specification

ESPRIT ECO ² MODELS	ESPRIT ECO ² 24	ESPRIT ECO ² 30	ESPRIT ECO ² 35
Weight (packaged) (kg)	33.7	33.7	33.8
Max installation weight (kg)	29.9	29.9	30.0
CH output (kW) min/max mean 70°C	4.8 - 24.2	6.1 - 24.2	7.1 - 24.2
CH output (kW) min/max mean 40°C	5.1 - 25.6	6.4 - 25.6	7.5 - 25.6
DHW output (kW) max	24.2	30.3	35.3
DHW flow rate l/min. 35°C rise	9.9	12.4	14.5
SEDBUK rating (2005) %	91.0	91.1	91.0
SEDBUK rating (2009/2012) %	89.0	89.0	88.9
NOx classification	CLASS 6	CLASS 6	CLASS 6
Water heating efficiency class	A	A	A
Max horizontal flue (m)	9	8	6
Max vertical flue (m)	7.5	7.5	7.5
Seasonal space heating efficiency class	A	A	A
Seasonal space heating energy efficiency (η _s) %	94	94	94
Sound power level, indoors (L _{WA} dB)	46	46	41