

Technical submittal

Products: **Halstock calorifier HS9652CO / HS965UV2CO**

Project:

Customer:

Date:

- ⊗ Indirect method of producing safe and hygienic domestic hot water
- ⊗ Fast recovery for constant hot water
- ⊗ Hot water cylinder and coil made out of corrosion resistant stainless steel for a long life backed up by a 5 year cylinder warranty
- ⊗ Twin coils for flexibility and high performance hot water
- ⊗ Can be integrated with solar thermal for a renewable energy option
- ⊗ Minimal heat loss for maximum economy thanks to layer of CFC-free polyurethane tank insulation under protective plastisol cladding
- ⊗ Highly efficient heat transfer from a corrugated coil design
- ⊗ Low maintenance as no sacrificial anodes or powered corrosion protection systems needed
- ⊗ Versatility in use – coupled to Hamworthy commercial boilers or backup via immersion heater
- ⊗ UK manufactured



	Halstock model	Units	HS9652CO / HS965UV2CO
Water	Capacity, nominal	litres	965
	Capacity with coil	litres	958
	Continuous output @44°CΔT	l/h	2106
	Continuous output @50°CΔT	l/h	1853
	Maximum working pressure, tank	bar	6
	Hydraulic test pressure	bar	9
Energy	Number of coils		2
	Lower coil output	kW	81
	Heat up time @50°CΔT, lower coil only	min	42
	Upper coil output	kW	27
	Heat up time @50°C ΔT, top coil only	min	126
	Heat up time @50°CΔT, combined coils	min	31
	Recovery time 70% @50°C ΔT, combined coils	min	22
	10 min peak output @50°CΔT	litres	1274
	Coil max operating temperature	°C	100
	Coil max operating pressure	bar	3
	Upper coil tube diameter	DN	DN25
	Upper coil surface area	m²	1
	Lower coil tube diameter	DN	DN25
	Lower coil surface area	m²	3
	Reheat total delta T 50°C lower	mins	29
	Reheat total delta T 50°C both	mins	22
Immersion	Standby losses	kW/24hr	3.43
	ErP efficiency rating	-	Compliant
	Immersion heater option, power	kW	12
	Immersion heater option, phase	ph	3ph
Misc.	Heat up time, Immersion only	hour	4.7
	Recovery time, Immersion only	hour	3.3
	Expansion vessel size	litres	80
	Weight empty	kg	180
	Weight full	kg	1145



Technical submittal




Products: **Halstock calorifier HS9652CO / HS965UV2CO**

Project:

Customer:

Date:

Dimensions

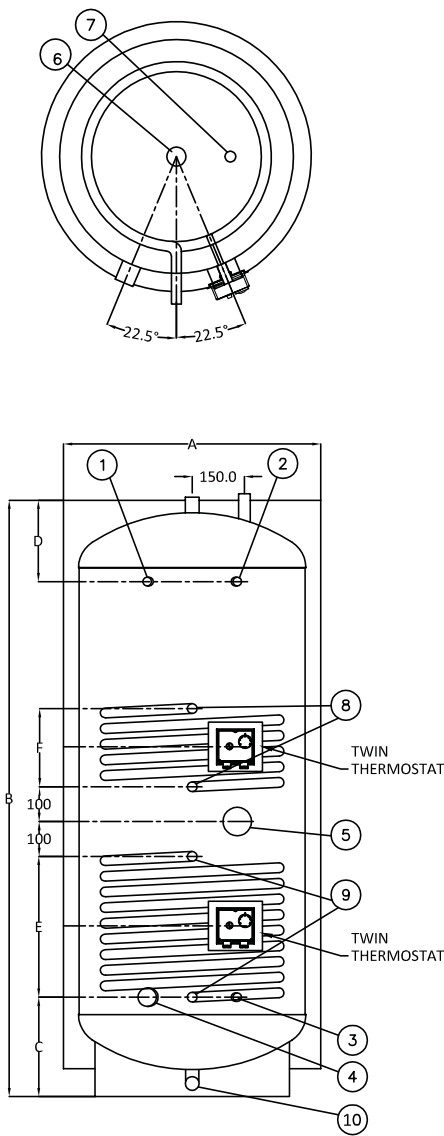

Note: All dimensions in mm unless otherwise stated.

Calorifiers																
Models	Dimensions (mm)							Connections (BSP Female)								
	A	B	C	D	E	F	G	1	2 & 3	4	5	6	7	8	9	10
	Dia.	Height	Inlet	2nd Return	Bottom coil centres	Top coil centres	Insulation	Aux port input	De Strat	Inlet	Immersion	Outlet	T&P	Top Coil Ø	Bottom Coil Ø	Drain
965	1080	1850	341	341	405	135	90	½"	22mm Stub	1½"	2¼"	1½"	¾"	28mm Stub	28mm Stub	1"

Every effort has been taken to ensure the details are accurate. Hamworthy Heating does not, however, guarantee the accuracy or completeness of any information nor does it accept liability for any errors or omissions in the information. Hamworthy Heating reserves the right to make changes and improvements which may necessitate alteration to product specification without prior notice.