
FACTORY SETTING FOR HONEYWELL TYPE 5 MCBA PARAMETERS

Parameter	Factory Setting
1	140°F
2	01
3	01
4	186°F
10	86°F
11	00°F
12	64°F
13	(-)22°F
18	32°F
19	00 minutes
20	00°F
21	46°F
32	01 minute
33	03 x 10.2 sec.
38	02°F
39	06°F
40	03 x 10.2 sec.
41	00 x 10.2 sec.
42	00 x 10.2 sec.
43	00 minute
45	00
46	13

Additional quality water heating equipment available from Triangle Tube

PRESTIGE SOLO CONDENSING WALL MOUNTED BOILER




- 95% AFUE Efficiency
- Fully modulating
- Stainless Steel heat exchanger
- Direct vent with PVC
- Low NOx
- Highest water content in the industry
- Digital display

SMART SERIES INDIRECT FIRED WATER HEATERS



- Exclusive tank-in-tank design
- Stainless steel construction
- Available in 8 sizes and 2 models
- Limited LIFETIME residential warranty
- 15 year limited commercial warranty
- Self cleaning/self descaling design

TTP BRAZED PLATE HEAT EXCHANGERS

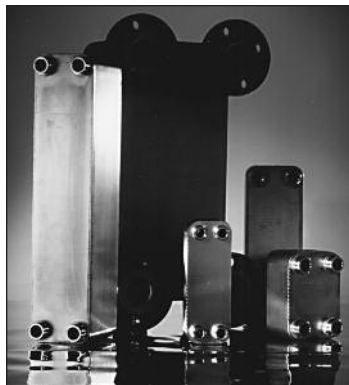

- For domestic water, snow melting, radiant floor, refrigeration
- Plates made of stainless steel, with a 99.9 % copper and brazed, ensuring a high resistance to corrosion
- Self cleaning and self descaling
- Computerized sizing available from Triangle Tube/Phase III
- Available in capacities from 25,000 BTU/hr to 5,000,000 BTU/hr



Freeway Center - 1 Triangle Lane - Blackwood, NJ 08012
Tel: (856) 228 8881 - Fax: (856) 228 3584
E-mail: Sales@triangletube.com