

the **HAMWORTHY**

# BRAZED PLATE HEAT EXCHANGER

## 750kW


**Perfect for refurb  
and retrofit  
situations**

Compact design

Low maintenance  
and self-cleaning

Separates system  
water from the boiler

Used with Hamworthy  
Heating Cascade kits

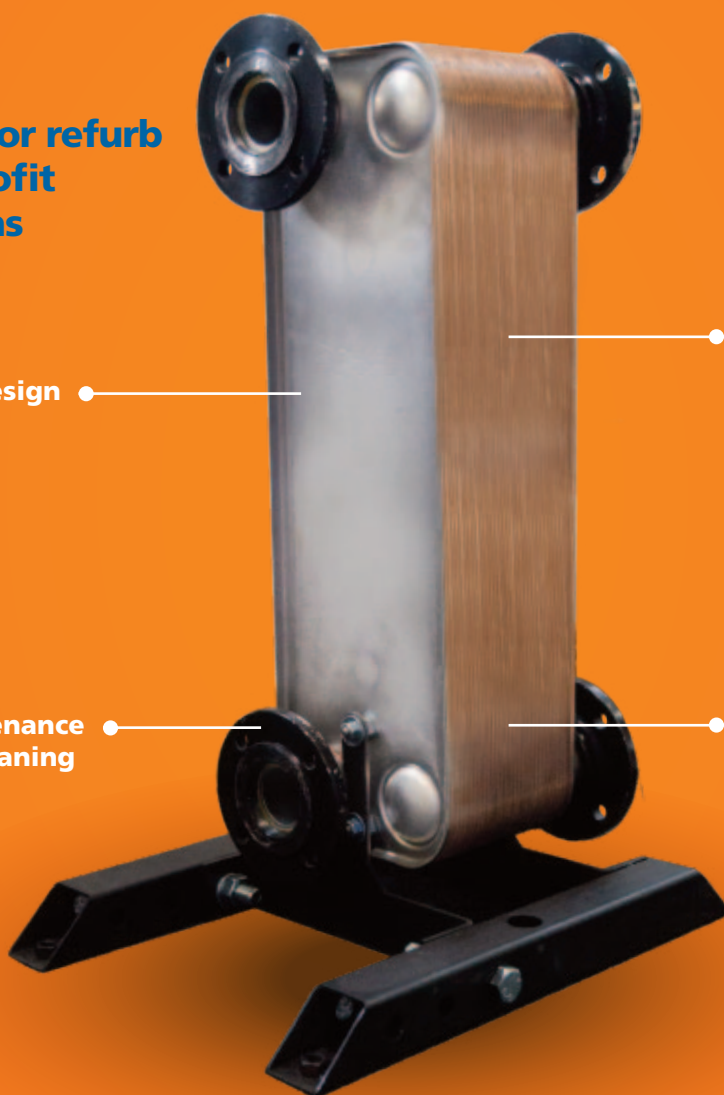

SCAN  
ME

**ASK**  
advice. specification. knowledge.




# Brazed Plate Heat Exchanger – 750kW



750kW is the nominal capacity of the plate heat exchanger applying the operating conditions shown below. Please contact Hamworthy Heating to confirm the expected performance if the operating conditions differ from those shown.

## DN100

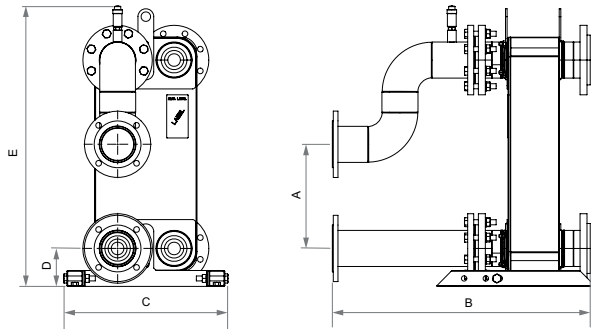

## Installed dimensions

Dimension	A	B	C	D	E
DN100	330	831	500	120	888

Installed weight (including PHE, spools and support)

DN100 Kit = 117.5kg

	UNITS	HOT SIDE	COLD SIDE
Mass flow rate	kg/s	8.98	8.98
Inlet temperature	°C	80	50
Outlet temperature	°C	60	70
Pressure drop	kPa	14.2	19.9
Heat exchanged	kW	750	
Heat transfer area	m <sup>2</sup>	17.6	
Flow configuration	Countercurrent		
Number of plates / thickness	72 / 0.3 mm		
Number of passes		1	1
Pressure vessel code	PED		
Design pressure at 90.00 Celsius	Bar	19	19
Design pressure at 225.0 Celsius	Bar	15	15
Design temperature	°C	-196.0 / 225.0	
Volume	L	22.9	14.6

## Standard materials

Cover plates	Stainless steel
Connections	Stainless steel
Plates	Stainless steel
Brazing	Copper

### PLEASE NOTE:

The plate heat exchangers are to be used for system separation only. They must not be used for the direct production of domestic hot water.

They should not be used for direct heating of swimming pool water where the chlorinated pool water would pass directly through the plate heat exchanger.

## Connections

### FRAME & HEADER

Stratton mk3	DN50	DN80	DN100
			✓

### System

DN100

### Flanged

PN16

[hamworthy-heating.com](http://hamworthy-heating.com)

[sales@hamworthy-heating.com](mailto:sales@hamworthy-heating.com) | 01202 662500

