

**Manufactured  
for quality and  
performance since 1906,  
that's LONGEVITY.**

# EXALT

WALL MOUNT



Ctrmax Control System:  
Fast And Easy 60 Sec Set Up



Easy Access / Serviceability



Combi: DHW Top Connections,  
Up To 5+ Gpm Output




Inhibitor Included



NG and LP Specific Models




# Install with confidence, a quality boiler that lasts.

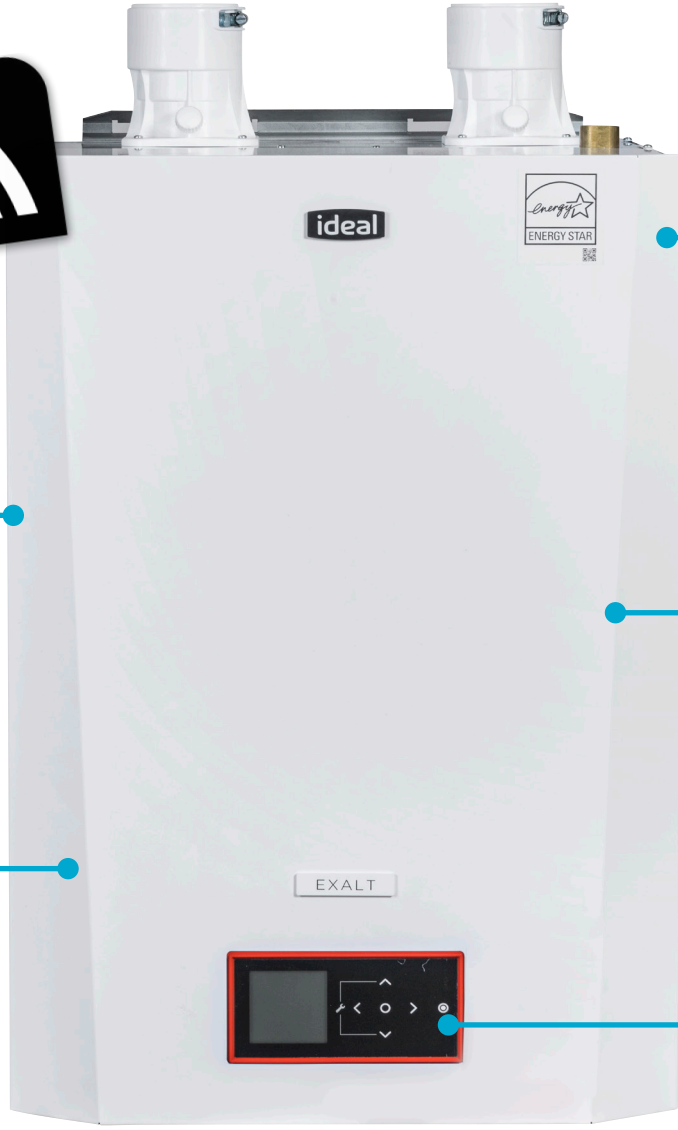

 Easy Access /  
Serviceability

 DHW Combi Units:  
Up to 5+ GPM

 Stainless Steel Fire Tube  
Heat Exchanger

 4 Pump Outputs:  
Boiler / CH1 / CH2/ DHW

 CTRLMAX Control System:  
Fast and Easy 60 Sec Set Up



The Exalt is engineered with reliability in mind and each product is manufactured from our factory using the No-Fault Forward Production System where products receive over 200 quality checks before leaving the factory.



Ctrlmax Control System:  
Fast And Easy 60 Sec Set Up



Easy Access / Serviceability



Combi: DHW Top Connections,  
Up To 5+ Gpm Output



Ideal Advantage Warranty Program:  
Up To 12 Years Heat Exchanger /  
6 Yrs Parts / 3 Yrs Labor



4 Pump Outputs:  
Boiler / CH1 / CH2 / DHW



Stainless Steel Fire Tube  
Heat Exchanger




3-In-1 Universal Vent Adaptor  
Directly Accepts PVC



No Fault Forward  
Production System



AFUE Energy Efficiency  
Rating Of 95%

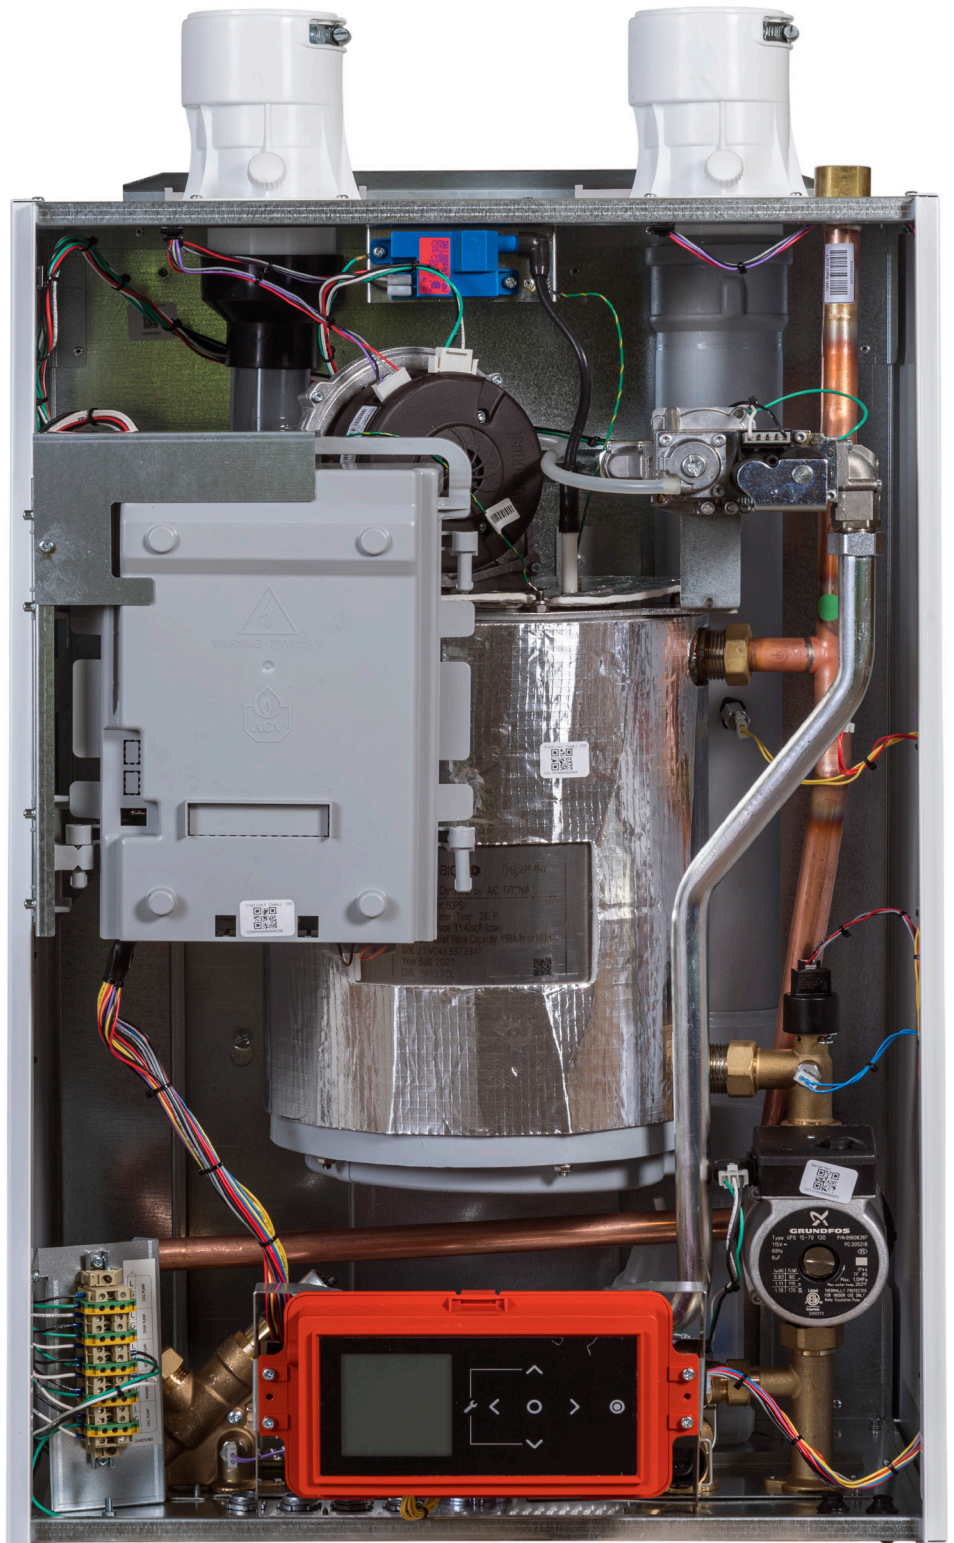

**NO FAULT FORWARD**  
**MEANS QUALITY**

## EXALT MODELS

| EXALT MODEL (NG) | IDEX110S  | IDEX155S  | IDEX199S  | IDEX155C   | IDEX199C   |
|------------------|-----------|-----------|-----------|------------|------------|
| EXALT MODEL (LP) | IDEX110LP | IDEX155LP | IDEX199LP | IDEX155CLP | IDEX199CLP |

## PERFORMANCE SPECIFICATIONS

| FUEL                               | NG & LP | NG & LP | NG & LP | NG & LP | NG & LP |
|------------------------------------|---------|---------|---------|---------|---------|
| Min Input (BTU)                    | 13,750  | 19,375  | 24,875  | 19,375  | 24,875  |
| Max Input (BTU)                    | 110,000 | 155,000 | 199,000 | 155,000 | 199,000 |
| Turndown Ratio                     | 8:1     | 8:1     | 8:1     | 8:1     | 8:1     |
| AFUE                               | 95%     | 95%     | 95%     | 95%     | 95%     |
| DOE Heating Capacity (MBH)         | 102     | 142     | 184     | 142     | 184     |
| AHRI Net Rating (MBH)              | 89      | 123     | 159     | 123     | 159     |
| Gas Connection (MNPT)              | 3/4"    | 3/4"    | 3/4"    | 3/4"    | 3/4"    |
| Supply / Return Connections (MNPT) | 1"      | 1"      | 1"      | 1"      | 1"      |
| Domestic Inlet/Outlet Connections  | -       | -       | -       | 3/4"    | 3/4"    |
| Vent/Air Connections               | 3"      | 3"      | 3"      | 3"      | 3"      |

## TECHNICAL DATA

|                                       |          |          |          |          |          |
|---------------------------------------|----------|----------|----------|----------|----------|
| 2" Maximum Vent Length                | 28'      | 28'      | -        | 33'      | -        |
| 3" Maximum Vent Length                | 100'     | 100'     | 100'     | 100'     | 100'     |
| Water Volume (Gallons)                | 2        | 3        | 4        | 3        | 4        |
| DHW Output GPM (70°F rise)            | -        | -        | -        | 4.0      | 5.3      |
| DHW Output GPM (75°F rise)            | -        | -        | -        | 3.7      | 4.9      |
| DHW Output GPM (80°F rise)            | -        | -        | -        | 3.5      | 4.6      |
| DHW Minimum Flow Rate (GPM)           | -        | -        | -        | 0.5      | 0.5      |
| DHW Maximum Operating Pressure (PSI)  | -        | -        | -        | 150      | 150      |
| CH Maximum Flow Temperature (°F[°C])  | 185 (85) | 185 (85) | 185 (85) | 185 (85) | 185 (85) |
| DHW Maximum Flow Temperature (°F[°C]) | -        | -        | -        | 150 (65) | 150 (65) |
| Cabinet Height                        | 26"      | 26"      | 26"      | 33"      | 33"      |
| Cabinet Width                         | 21-3/4"  | 21-3/4"  | 21-3/4"  | 21-3/4"  | 21-3/4"  |
| Cabinet Depth                         | 16-1/2"  | 16-1/2"  | 16-1/2"  | 16-1/2"  | 16-1/2"  |
| Weight (Lbs)                          | 88       | 99       | 119      | 110      | 128      |

## IDEAL ADVANTAGE

A warranty program that rewards both the contractor and homeowner.

| WARRANTY TYPE | LABOR ALLOWANCE    | PARTS              | HEAT EXCHANGER      |
|---------------|--------------------|--------------------|---------------------|
| ELITE*        | 3<br>YEAR WARRANTY | 6<br>YEAR WARRANTY | 12<br>YEAR WARRANTY |
| PLUS**        | 2<br>YEAR WARRANTY | 5<br>YEAR WARRANTY | 10<br>YEAR WARRANTY |
| STANDARD      | 0<br>YEAR WARRANTY | 2<br>YEAR WARRANTY | 10<br>YEAR WARRANTY |

\*Register Boiler (providing customer and contractor information); Upload a photo of readings from your combustion analyser

\*\*Register Boiler (providing customer and contractor information)

