

LED T8 U-BEND LAMPS

FIELD SELECTABLE | U6 & U1 LEG SPACING



**FIELD SELECTABLE
(CCT AND WATTAGE)**

TYPE A/B BALLAST BYPASS

NSF® APPROVED

**SINGLE & DOUBLE ENDED
WIRING**

FULL GLASS HOUSING

SUGGESTED APPLICATIONS

- Residential
- Office Buildings
- Shopping Malls
- Hospitals
- Schools

SATCO|NUVO offers LED filament U-Bend lamps with both 1-inch and 6-inch leg spacing, delivering versatile and efficient lighting solutions for a range of applications. These lamps consume significantly less energy than their fluorescent counterparts and feature a much longer lifespan, leading to reduced maintenance costs. With selectable CCT and wattage, users can perfectly tailor the light output to their needs. The Type A/B ballast bypass compatibility provides flexibility for easy installation with or without the existing ballast, enhancing convenience and long-term energy savings. Constructed with full glass housing, these lamps resist aging, yellowing, and bending, ensuring lasting durability. They are mercury-free, environmentally friendly, and NSF® approved, making them safe for food service and healthcare environments. Retrofit your fluorescent U-Bend lamps with our LED U-Bend lamps and start saving today.



GENERAL SPECIFICATIONS


Input Voltage: 120V-277V
Frequency: 50/60Hz
Power Factor: >0.9
THD: <20%
Dimmable: Only in Type A mode
Ballast Compatible:
 Ballast required (Type A) or Ballast Bypass (Type B)
Efficacy: Up to 156 LPW
CCT Selectable: 3000K/3500K/4000K/5000K/6500
CRI: 80+

Location Rating: Damp
Ambient Operating Temperature:
 -20°C (-4°F) to +45°C (+113°F)
Enclosed Fixture Rating: No
Material: Glass
Lens Finish: Frost
Wiring: Single Ended; Double Ended
Lamp Base: G13
Functional Life: 50,000 Hours
Warranty: 5 Years



ITEM SPECIFICATIONS / ORDER INFO

Item	Leg Spacing	Lumens	Wattage	Max Replacement Wattage	Input Current (Type B)	Beam Angle
S18413	6.00"	1800/2000/2200	11.5W/13W/15W	32W	0.18A	210°
S18414	1.63"	1800/2000/2200	11.5W/13W/15W	31W	0.18A	210°

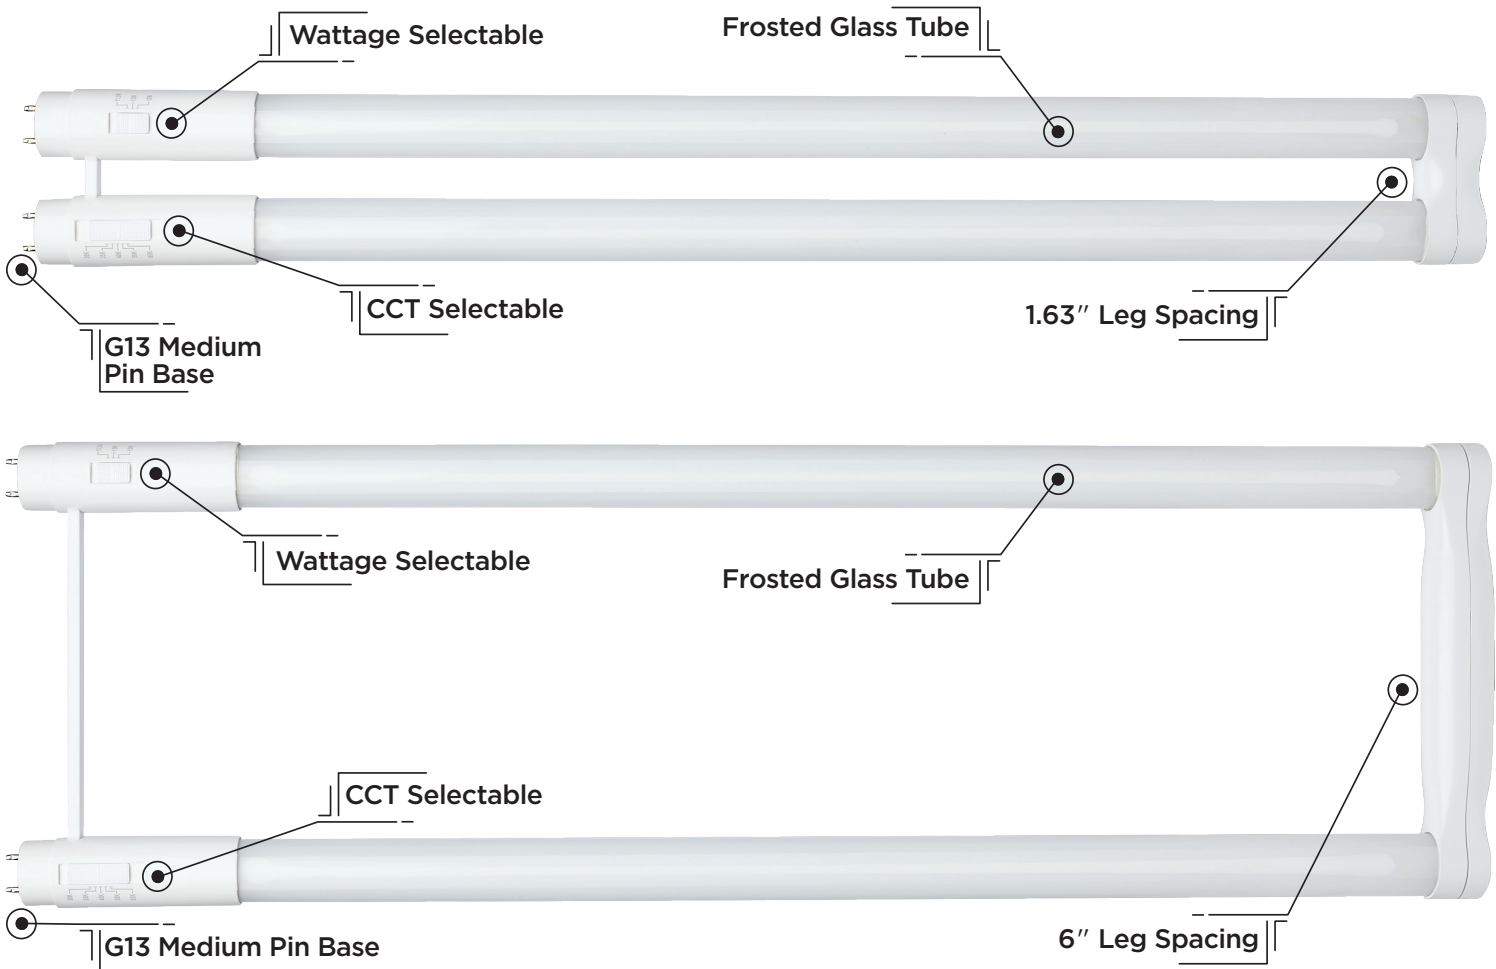

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

ONLY FOR USE AS EMERGENCY LIGHTING IF POWERED BY SATCO PRODUCTS EMERGENCY DRIVERS, MODEL S8000 OR S8002, AND ONLY IN TYPE B MODE.

Replacement wattage shown depends on application and fixture. Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.

DIMENSIONS / WEIGHTS

Item	Leg Spacing (A)	MOL (B)	MOD (C)	Weight
S18413	6.00"	22.43"	0.96"	0.55 Lbs.
S18414	1.63"	22.43"	0.96"	0.50 Lbs.

