



TYPE A+B DUAL MODE

GX23 AND G24D BASES

**ENERGY-EFFICIENT
COMPACT LED DESIGN**

**PROVIDES EVEN,
GLARE-FREE LIGHT**

SUGGESTED APPLICATIONS

Retail
Hospitality
Office Buildings
Schools

CFL REPLACEMENT LAMPS

TYPE A+B DUAL MODE | COMPACT OMNI DIRECTIONAL



S21420
5W / GX23

S21425
7W / G24d

S21430
5W / G24d

SATCO|NUVO's CFL replacement lamps deliver reliable, energy-efficient performance in a compact and versatile PL shape. This comprehensive line offers 5W or 7W options to replace 13W, 18W, or 26W CFLs, with dedicated color temperatures from 2700K to 5000K and lumen outputs ranging from 580 to 910. A+B dual mode ballast compatibility ensures flexibility for both plug-and-play and ballast bypass installations. Constructed with durable aluminum and plastic and finished with a frosted lens, they provide even, glare-free illumination in any universal operating position. Damp location rated with a 50,000-hour lifespan and backed by a 5-year warranty; these non-dimmable lamps are built for lasting performance. GX23 and G24d base options make them an ideal solution for a wide range of CFL retrofit applications.



GENERAL SPECIFICATIONS

Range Voltage: 120V-277V

Frequency: 50/60Hz

Dimming: Non-Dimmable

Ballast: Type A+B Dual Mode

CRI: 80+

Location Rating: Damp

Ambient Operating Temperature:

-20°C (-4°F) to +45°C (+113°F)

Operating Position: Universal

Beam Angle: 300°

Lamp Shape: PL

Material: Aluminum/Polycarbonate

Lens Finish: Frost

Functional Life: 50,000 Hours

Warranty: 5 Years



ITEM SPECIFICATIONS / ORDER INFO

Item	Wattage	Replacement Wattage	Lamp Lumens	CCT	Lamp Base	Input Current	Efficacy
S21420	5W	13W	580	2700K	GX23	0.04-0.02A	up to 116 LPW
S21421	5W	13W	610	3000K	GX23	0.04-0.02A	up to 122 LPW
S21422	5W	13W	630	3500K	GX23	0.04-0.02A	up to 126 LPW
S21423	5W	13W	650	4000K	GX23	0.04-0.02A	up to 130 LPW
S21424	5W	13W	650	5000K	GX23	0.04-0.02A	up to 130 LPW
S21425	7W	13W/18W/26W	800	2700K	G24d	0.06-0.03A	up to 114 LPW
S21426	7W	13W/18W/26W	840	3000K	G24d	0.06-0.03A	up to 120 LPW
S21427	7W	13W/18W/26W	870	3500K	G24d	0.06-0.03A	up to 124 LPW
S21428	7W	13W/18W/26W	910	4000K	G24d	0.06-0.03A	up to 130 LPW
S21429	7W	13W/18W/26W	910	5000K	G24d	0.06-0.03A	up to 130 LPW
S21430	5W	13W	580	2700K	G24d	0.04-0.02A	up to 116 LPW
S21431	5W	13W	610	3000K	G24d	0.04-0.02A	up to 122 LPW
S21432	5W	13W	630	3500K	G24d	0.04-0.02A	up to 126 LPW
S21433	5W	13W	650	4000K	G24d	0.04-0.02A	up to 130 LPW
S21434	5W	13W	650	5000K	G24d	0.04-0.02A	up to 130 LPW

FEATURES



Durable PC Lens



GX23 Base


G24d Base



CFL quad lamp replacement

DIMENSIONS / WEIGHTS

Item	MOL (A)	MOD (B)	Weight
S21420	4.09"	1.52"	0.11 Lbs.
S21421	4.09"	1.52"	0.11 Lbs.
S21422	4.09"	1.52"	0.11 Lbs.
S21423	4.09"	1.52"	0.11 Lbs.
S21424	4.09"	1.52"	0.11 Lbs.
S21425	4.53"	1.52"	0.14 Lbs.
S21426	4.53"	1.52"	0.14 Lbs.
S21427	4.53"	1.52"	0.14 Lbs.
S21428	4.53"	1.52"	0.14 Lbs.
S21429	4.53"	1.52"	0.14 Lbs.
S21430	3.90"	1.52"	0.11 Lbs.
S21431	3.90"	1.52"	0.11 Lbs.
S21432	3.90"	1.52"	0.11 Lbs.
S21433	3.90"	1.52"	0.11 Lbs.
S21434	3.90"	1.52"	0.11 Lbs.

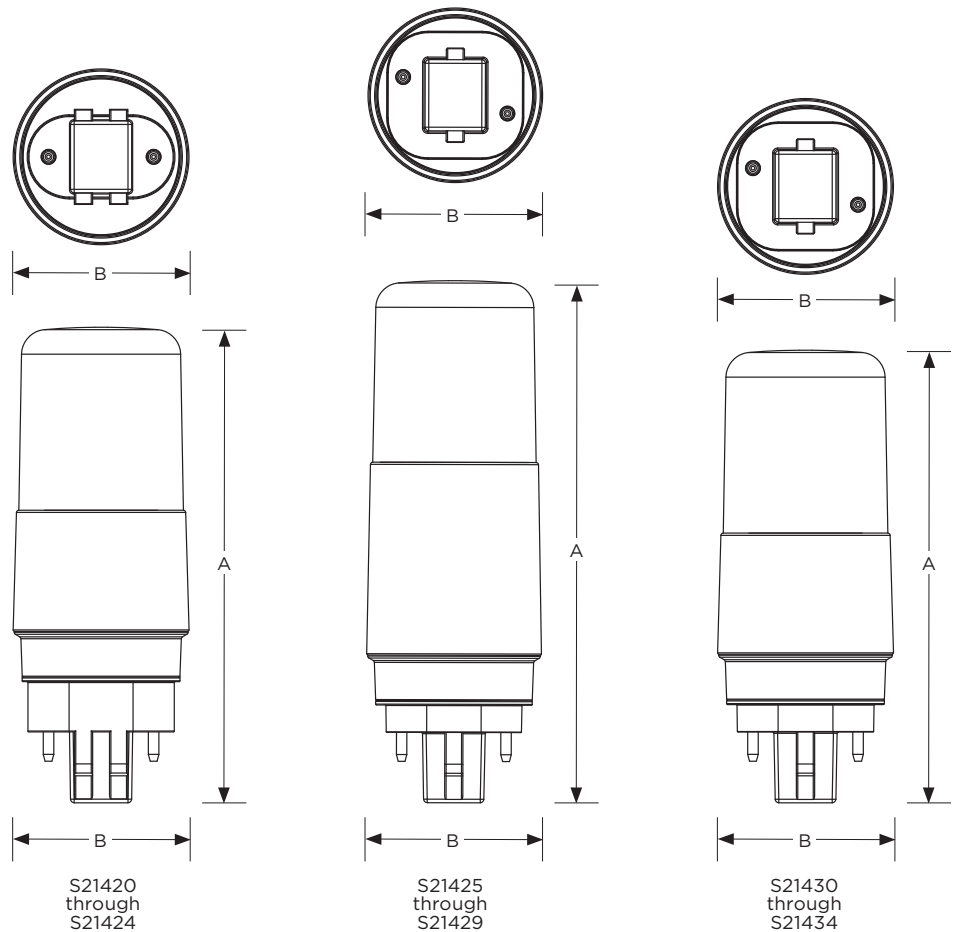

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Meets requirements of ICES-005 issue 5 class B for use in residential applications.

May not be compatible with all dimming ballasts. Visit satco.com for details.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.