

DIMENSION™ PRO

INDOOR LED SMART TAPE LIGHT KIT



STARFISH™
Controlled with App



**STARFISH™ SMART
ENABLED PRODUCT**

**DYNAMIC RGB,
COLOR-CHANGING
& TUNABLE WHITE**

**PRE-SET & CUSTOM
COLOR-CHANGING EFFECTS**

**IR REMOTE CONTROL
OR APP CONTROLLED**


**16FT, 32FT & 64FT
KITS AVAILABLE**

**PLUG-IN OR
DIRECT-WIRE KITS**


CUTTABLE & LINKABLE

SUGGESTED APPLICATIONS:
Commercial or Decorative
Residential Applications

HIGH BRIGHTNESS



Immerse yourself in a world of limitless possibilities with DIMENSION™ Pro, the smart app-controlled tape light that will redefine your lighting experience. With the ability to choose from millions of colors or adjust the light from warm to cool tunable white, this STARFISH® smart product puts the power of customization in your hands. Sync your light to the rhythm of your favorite music and watch as your space comes alive with vibrant hues and captivating effects. From soothing transitions to dynamic color-changing displays, DIMENSION™ Pro offers a wide range of mesmerizing options that will transform your space into a visual spectacle.

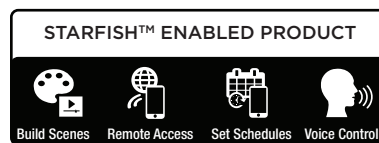

*Via App or Remote



GENERAL SPECIFICATIONS

Color: RGBTW

CRI: 80

Functional Life: 50,000 Hours

Location Rating: Dry (Indoor Only)

Wired Controller: Yes

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)

Cut to Length: Yes

Dimmable: Yes, Dimmable with App or Remote

Warranty: 1 Year

Remote: IR

ITEM SPECIFICATIONS / ORDER INFO



Item	Length	Style	Input Voltage	DC Voltage	Watts	Lumens	Number of Reels	UPC
64-130	16'	Plug In	120V	24V	18W	1920L	1	045923640292
64-131	32'	Plug In	120V	24V	30W	3080L	1	045923640308
64-132	64'	Plug In	120V	24V	68W	6300L	2	045923640520
64-133	16'	Direct Wired	120V-277V	24V	20W	1920L	1	045923640537
64-134	32'	Direct Wired	120V-277V	24V	30W	3080L	1	045923640544
64-135	64'	Direct Wired	120V-277V	24V	68W	6300L	2	045923640551

ACCESSORIES INCLUDED IN KITS



Plug-In Driver



Direct Wire
Junction Box



Controller/Receiver



Dual Controller/
Receiver



IR Remote



Single Reel for
64/130, 64/131, 64/132, and 64/133 Kits



Dual Reel for
64/132 and 64/135 Kits

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

OPTIONAL ACCESSORIES

Item	Description	Qty/ Pcs	UPC
Tape Extension and Connectors			
Tape to Tape			
64-160	Tape-to-Tape Connector	5	045923644788
64-161	6" Jumper Wire	5	045923644795
64-162	90° Connector	5	045923644801
Wire to Tape			
64-164	Wire to Tape Connector	6	045923644177
64-165	50' Tape Wire	1	045923644184
Extension			
64-170	16' Power Extension Cord	5	045923641701
Kit for Cut Tape			
64-172	Tape Control Connector, Plug-In	1	045923640704
64-173	Tape Control Connector, Junction Box	1	045923640728
Channels and Diffusers			
Recessed			
64-150	Recessed Deep Channel and Diffuser	5	045923644733
Surface			
64-151	Deep Channel and Diffuser	5	045923644740
64-154	Shallow Channel and Diffuser	5	045923644771
Corner			
64-152	45° Corner Channel and Diffuser	5	045923644757



64-164



64-160



64-165



64-162



64-161



64-170



64-172



64-173



64-154



64-152




64-151




64-150

TAPE LIGHT DIMENSIONAL DIAGRAMS

64/130 | 64/133

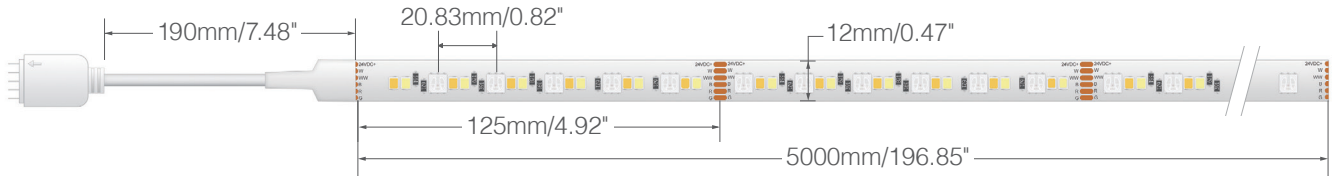

64/131 | 64/132 | 64/134 | 64/135

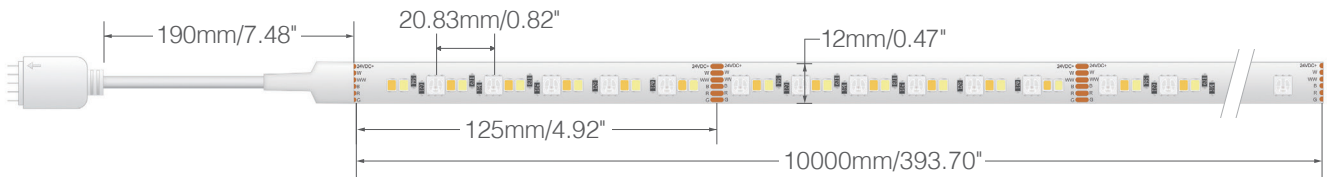

DRIVER CONNECTION DIAGRAMS

