



**HALOGEN
REPLACEMENT LAMPS**

**FROSTED AND CLEAR
OPTIONS**

**300°
OMNI-DIRECTIONAL LIGHT**

3000K OR 5000K

**DURABLE
COMMERCIAL DESIGN**

SUGGESTED APPLICATIONS

Elevators
Landscape Lighting
Specialty Lighting

LED HALOGEN REPLACEMENT LAMPS

SINGLE AND DOUBLE CONTACT BASES



BA15d Frost

BA15d Clear



Selected item available carded or retail box



BA15s Clear

SATCO|NUVO's Single and Double Contact LED Halogen Replacement bulbs offer bright illumination while consuming minimal power. Designed for socket configurations commonly found in elevators, landscape lighting, and specialty lighting, they incorporate LED technology for longer lifespan and reduced maintenance costs. Choose from various wattage options and 3000K or 5000K CCT options to perfectly match your aesthetic preferences and lighting requirements.

**SCAN BELOW FOR OTHER PIN BASED AND
MINIATURE REPLACEMENT CATEGORIES:**



12V G4 and GY6.35
SA3059



120V G8, G9, and GY6.35
SA3061



Single & Double contact
SN1645



GENERAL SPECIFICATIONS

Frequency: 60Hz
THD: 70%
Beam Angle: 300°
Dimmable: Yes
CRI: 80

Functional Life: 25,000 Hours
Location Rating: Damp
Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)
Enclosed Fixture Rated: Yes




ITEM SPECIFICATIONS / ORDER INFO

Item	Input Voltage	Power Factor	Wattage	Lamp Base	CCT	Lamp Finish	Halogen Replacement Wattage	Lumens	Input Current	Efficacy	Lamp Material	Package Type
T6 - BA15s Base												
S12138*	12V	0.7	4.5W	BA15s	3000K	Clear	40W	430	0.50A	95 LPW	Ceramic / Polycarbonate	Carded
S12139*	12V	0.7	4.5W	BA15s	5000K	Clear	40W	430	0.50A	95 LPW	Ceramic / Polycarbonate	Carded
S12358*	12V	0.7	4.5W	BA15s	3000K	Clear	35W	430	0.50A	95 LPW	Ceramic / Polycarbonate	Box
S12359*	12V	0.7	4.5W	BA15s	5000K	Clear	35W	430	0.50A	95 LPW	Ceramic / Polycarbonate	Box
T6 - BA15d Base												
S12136	120V	0.9	5W	BA15d	3000K	Clear	40W	550	0.05A	110 LPW	Ceramic / Polycarbonate	Carded
S12137	120V	0.9	5W	BA15d	5000K	Clear	40W	550	0.05A	110 LPW	Ceramic / Polycarbonate	Carded
S12350	120V	0.9	5W	BA15d	3000K	Clear	40W	550	0.05A	110 LPW	Ceramic / Polycarbonate	Box
S12351	120V	0.9	5W	BA15d	5000K	Clear	40W	550	0.05A	110 LPW	Ceramic / Polycarbonate	Box
S12352	120V	0.9	5W	BA15d	3000K	Frost	40W	500	0.05A	100 LPW	Ceramic / Polycarbonate	Box
S12353	120V	0.9	5W	BA15d	5000K	Frost	40W	500	0.05A	100 LPW	Ceramic / Polycarbonate	Box
S12354	120V	0.9	6.5W	BA15d	3000K	Clear	50W	650	0.06A	100 LPW	Ceramic / Polycarbonate	Box
S12355	120V	0.9	6.5W	BA15d	5000K	Clear	50W	650	0.06A	100 LPW	Ceramic / Polycarbonate	Box
S12356	120V	0.9	6.5W	BA15d	3000K	Frost	50W	600	0.06A	92 LPW	Ceramic / Polycarbonate	Box
S12357	120V	0.9	6.5W	BA15d	5000K	Frost	50W	600	0.06A	92 LPW	Ceramic / Polycarbonate	Box

*S12138, S12139, S12358 and S12359 are cULus Listed, FCC and RoHS

DIMENSIONS/WEIGHTS

Item	MOL (A)	MOD (B)	Weight
S12138	2.13"	0.67"	0.03 Lbs.
S12139	2.13"	0.67"	0.03 Lbs.
S12358	2.13"	0.67"	0.03 Lbs.
S12359	2.13"	0.67"	0.03 Lbs.
S12136	2.17"	0.75"	0.05 Lbs.
S12137	2.17"	0.75"	0.05 Lbs.
S12350	2.17"	0.75"	0.05 Lbs.
S12351	2.17"	0.75"	0.05 Lbs.
S12352	2.17"	0.75"	0.05 Lbs.
S12353	2.17"	0.75"	0.05 Lbs.
S12354	2.76"	0.75"	0.06 Lbs.
S12355	2.76"	0.75"	0.06 Lbs.
S12356	2.76"	0.75"	0.06 Lbs.
S12357	2.76"	0.75"	0.06 Lbs.

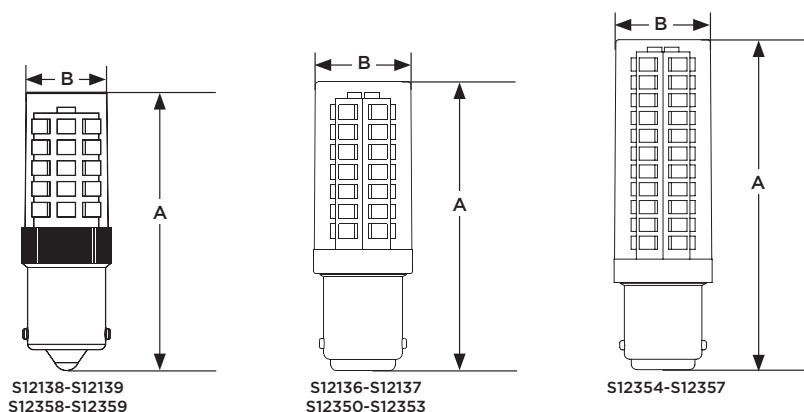

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Lamps may not be compatible with all dimmers.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <http://www.P65Warnings.ca.gov>.

SATCO.COM | 800-437-2826

© Satco Products, Inc. All rights reserved. 05/24 SN1645