

BUY AMERICAN ACT (BAA) LINEAR BALLAST BYPASS LED T8 LAMPS

SINGLE OR DOUBLE ENDED WIRING OPTIONS



**SINGLE OR DOUBLE ENDED
WIRING**

ALL-GLASS TUBES

**DIRECT WIRE 120-277V LINE
VOLTAGE**

SUITABLE FOR DAMP LOCATIONS

DLC 5.1

LONG LIFE—50,000 HOURS

Satco's new generation of Type B ballast bypass lamps, assembled in the USA and designed to replace T8 or T12 medium bi-pin fluorescent lamps are available in 2', 3' and 4' lengths. They are engineered for single or double-ended wiring options and will not light unless the ballast is bypassed. Public venues, schools, libraries, health care and any large-scale lighting application will benefit from immediate energy savings and less maintenance.



SATCO LED LAMPS

Single or double ended wiring*

Installation protection**

All-glass tubes

Direct wire 120-277V line voltage


Suitable for damp locations

DLC 5.1

Operating temp. -20°C/-4°F to 45°C/113°F

Compatible with Satco S8000 and S8002 LED EM Driver

Long life—50,000 hours

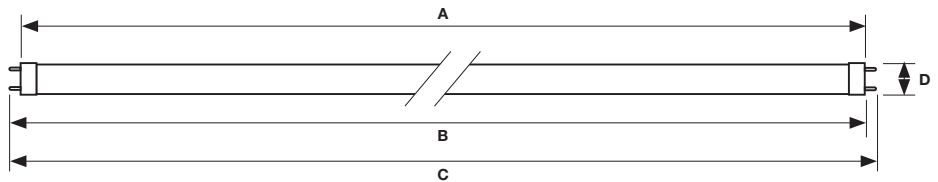

SIZE	WATTAGE	A Length (in.)	B Length (in.)	C Length (in.)	D Length (in.)
2 Foot	9W	23.21	23.50	23.78	1.02
3 Foot	12W	35.22	35.50	35.78	1.02
4 Foot	10.5W/14W/17W	47.22	47.50	47.78	1.02



Item	Description	W	CRI	Base Type	Bm	CCT	Lm	M.O.L. (in.)	Life/Hrs.	UPC	Pack
2' LED T8											
S11980	9T8/LED/24-830/BP/USA	9	80	G13	210°	3000	1100	24	50K	045923119804	25
S11981	9T8/LED/24-835/BP/USA	9	80	G13	210°	3500	1100	24	50K	045923119811	25
S11982	9T8/LED/24-840/BP/USA	9	80	G13	210°	4000	1150	24	50K	045923119828	25
S11983	9T8/LED/24-850/BP/USA	9	80	G13	210°	5000	1150	24	50K	045923119835	25
3' LED T8											
S11984	12T8/LED/36-830/BP/USA	12	80	G13	210°	3000	1400	36	50K	045923119842	25
S11985	12T8/LED/36-835/BP/USA	12	80	G13	210°	3500	1400	36	50K	045923119859	25
S11986	12T8/LED/36-840/BP/USA	12	80	G13	210°	4000	1450	36	50K	045923119866	25
S11987	12T8/LED/36-850/BP/USA	12	80	G13	210°	5000	1450	36	50K	045923119873	25
4' LED T8											
S11988	10.5T8/LED/48-830/BP/USA	10.5	80	G13	210°	3000	1700	48	50K	045923119880	25
S11989	10.5T8/LED/48-835/BP/USA	10.5	80	G13	210°	3500	1700	48	50K	045923119897	25
S11990	10.5T8/LED/48-840/BP/USA	10.5	80	G13	210°	4000	1700	48	50K	045923119903	25
S11991	10.5T8/LED/48-850/BP/USA	10.5	80	G13	210°	5000	1700	48	50K	045923119910	25
S11992	14T8/LED/48-830/BP/USA	14	80	G13	210°	3000	1700	48	50K	045923119927	25
S11993	14T8/LED/48-835/BP/USA	14	80	G13	210°	3500	1700	48	50K	045923119934	25
S11994	14T8/LED/48-840/BP/USA	14	80	G13	210°	4000	1800	48	50K	045923119941	25
S11995	14T8/LED/48-850/BP/USA	14	80	G13	210°	5000	1800	48	50K	045923119958	25
S11996	17T8/LED/48-830/BP/USA	17	80	G13	210°	6500	1800	48	50K	045923119965	25
S11997	17T8/LED/48-835/BP/USA	17	80	G13	210°	3000	2100	48	50K	045923119972	25
S11998	17T8/LED/48-840/BP/USA	17	80	G13	210°	3500	2100	48	50K	045923119989	25
S11999	17T8/LED/48-850/BP/USA	17	80	G13	210°	4000	2200	48	50K	045923119996	25

*Single ended wiring requires non-shunted sockets. **Protection against improper installation. Lamps will not light if the ballast has not been bypassed.

SATCO DISTRIBUTION CENTERS

NEW YORK (HQ)
110 HEARTLAND BLVD
BRENTWOOD, NY 11717
T. 631-243-2022
F. 631-243-2027

TEXAS
2000 VALWOOD PKWY
FARMERS BRANCH, TX 75234
T. 972-247-2437
F. 972-247-5408

FLORIDA
900 NW 159TH DR
MIAMI, FL 33169
T. 305-624-2044
F. 305-623-0286

CALIFORNIA
31288 SAN BENITO ST
HAYWARD, CA 94544
T. 510-487-4822
F. 510-487-8955

WASHINGTON
4710 116TH ST SW
MUKILTEO, WA 98275
T. 425-789-3300
F. 425-789-3310

PUERTO RICO
CAMPECHE STREET, 23
JULIO N. MATOS INDUSTRIAL PARK
CAROLINA, PR 00984
T. 787-757-3510
F. 787-757-3540

Products inventoried in Canada & Mexico, contact: internationalsales@satco.com / 631-243-2022 Ext. 315