



**FIELD SELECTABLE
(WATTAGE AND CCT)**

**RETROFIT EXISTING 2.75"-5.25"
WIDE FLUORESCENT STRIP
FIXTURES**

**ADJUSTABLE INSTALLATION
STRIPS INCLUDED**

**SMOOTH WHITE LENS FOR
EVEN LIGHT DISTRIBUTION**

SUGGESTED APPLICATIONS

Warehouses
Storage Areas
Manufacturing Facilities
Garage
Commercial

LED STRIP RETROFIT KITS

FIELD SELECTABLE | EASY INSTALLATION



65-1030



65-1031



65-1032



SATCO|NUVO's new LED Strip Retrofit Kits offer an energy-efficient solution for upgrading existing fluorescent strip fixtures. Designed with adjustable mounting strips to retrofit housings from 2.75" to 5.25" wide, these kits accommodate a wide range of installation needs. Available in 2ft, 4ft, and 8ft lengths, all models feature field-selectable technology (CCT and wattage). A white polycarbonate lens and robust steel body ensures even light distribution and long-lasting performance. A standard 0-10V dimming driver provides smooth, continuous dimming, and DLC Premium certification supports potential rebate eligibility. Installation is fast and efficient, there's no need to remove the lens, reducing labor time and lowering installation costs. Delivering uniform light, long life, and energy-efficient performance, these retrofit kits are ideal for warehouses, workshops, and a range of commercial and industrial spaces.



GENERAL SPECIFICATIONS

Input Voltage: 120V-277V
Frequency: 50/60Hz
Power Factor: 0.9
THD%: <20%
Dimming: 0-10V dimmable down to 20%
Surge Protection Rating: 2kV
Efficacy: 130 LPW
CRI: 80
CCT Selectable: 3500K/4000K/5000K

Beam Angle: 120°
Location Rating: Damp
Ambient Operating Temperature: -20°C (-4°F) to +45°C (+113°F)
Housing Construction: Steel
Lens Material: Polycarbonate
Lens Finish: White
Functional Life: 50,000 Hours
Warranty: 5 Years





ITEM SPECIFICATIONS / ORDER INFO

Item	Size	Lumens	Wattage Selectable	Input Current @120V/277V	DLC ID
65-1030	2FT	1950/2600/3250	15W/20W/25W	0.13-0.05/0.17-0.07/0.21-0.09A	S-9Z0S55; S-604WB2; S-V16MNV
65-1031	4FT	3900/5200/6500	30W/40W/50W	0.25-0.11/0.33-0.14/0.42-0.18A	S-SQ488H; S-B8W5P7; S-V1GZF7; S-Y4K2BS; S-ZFF52H
65-1032	8FT	7800/10400/13000	60W/80W/100W	0.50-0.22/0.67-0.29/0.83-0.36A	S-29ML87; S-SYFZX7; S-BY86YV; S-LK85KT


DIMENSIONS / WEIGHTS

Item	Length (A)	Width (B)	Fixture Height (C)	Driver Height (D)	Weight
65-1030	24.00"	5.89"	2.35"	3.30"	1.98 Lbs.
65-1031	47.90"	5.89"	2.35"	3.30"	3.42 Lbs.
65-1032	95.80"	5.89"	2.35"	3.30"	6.94 Lbs.

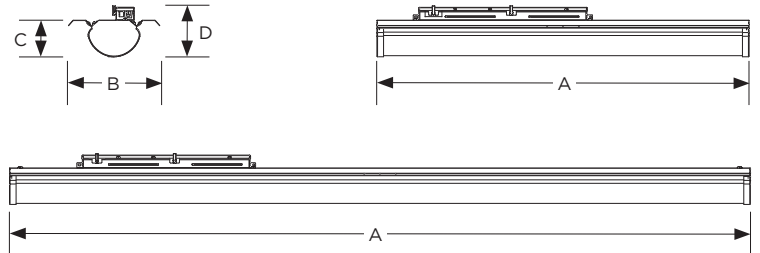


MOUNTING DIMENSIONS NOTE: This Strip Retrofit Kit is designed to fit 2', 4' and 8' strip fixtures. The housing has a width of 2.75" to 5.25" and a minimum depth of 1.25".


FEATURES

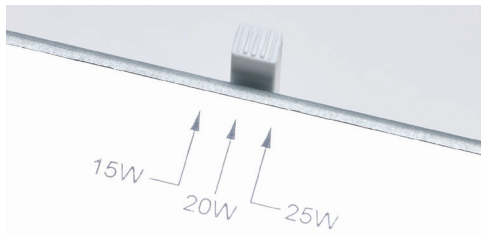

Wattage Selectable Switch

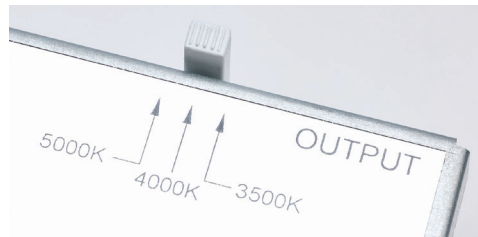

CCT Selectable Switch

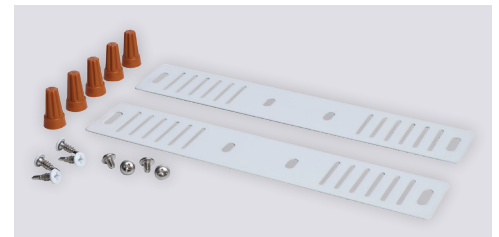

Adjustable Installation Strips Included

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Meets requirements of ICES-005 issue 5 class A for use in commercial applications.

Fixture may not be compatible with all dimmers. See satco.com for details.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

OPTIONAL ACCESSORIES

Item	Description	
86-202R	ADD ON MICROWAVE SENSOR	
86-211	ADD ON PIR SENSOR	
86-214	PROGRAMMING REMOTE FOR 86-202R	