



HALOGEN REPLACEMENT LAMPS

FROSTED AND CLEAR OPTIONS

300° OMNI-DIRECTIONAL LIGHT

3000K OR 5000K

DURABLE COMMERCIAL DESIGN

SUGGESTED APPLICATIONS

Indoor Residential
Commercial Lighting
Accent Lighting
Decorative Wall Lighting
Workspaces
Chandeliers

LED HALOGEN REPLACEMENT LAMPS

E11 AND E12 BASE



E12 Frost

E11 Clear

E12 Clear



Selected item available carded or retail box

Brighten up your space with SATCO|NUVO's E11 Mini Can and E12 Candelabra base Halogen replacement bulbs. Designed to be efficient, durable, and budget-friendly, these bulbs are ideal for a range of indoor and outdoor applications, such as chandeliers, track lighting, landscapes, pendants, and more. These bulbs offer adaptable lighting, tailored to your preferences with their 300-degree omni-directional light distribution and dimming capabilities. Choose from 3000K or 5000K CCT options to customize the lighting precisely to your liking.



GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120V, 60Hz

Power Factor, THD%: 0.9, 70%

Beam Angle: 300°

Dimmable: Yes

CRI: 80

Functional Life: 25,000 Hours

Location Rating: Damp

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)

Enclosed Fixture Rating: Yes



ITEM SPECIFICATIONS / ORDER INFO

Item	Watts	Lamp Base	CCT	Lamp Finish	Halogen Replacement Wattage	Lumens	Input Current	Efficacy	Lamp Material	Package Type
T6 - E11 Base										
S12132	5W	E11	3000K	Clear	40W	550	0.04A	110 LPW	Ceramic / Polycarbonate	Carded
S12133	5W	E11	5000K	Clear	40W	550	0.04A	110 LPW	Ceramic / Polycarbonate	Carded
S12334	5W	E11	3000K	Clear	40W	550	0.04A	110 LPW	Ceramic / Polycarbonate	Box
S12335	5W	E11	5000K	Clear	40W	550	0.04A	110 LPW	Ceramic / Polycarbonate	Box
S12336	5W	E11	3000K	Frost	40W	500	0.04A	100 LPW	Ceramic / Polycarbonate	Box
S12337	5W	E11	5000K	Frost	40W	500	0.04A	100 LPW	Ceramic / Polycarbonate	Box
S12338	6.5W	E11	3000K	Clear	50W	650	0.06A	100 LPW	Ceramic / Polycarbonate	Box
S12339	6.5W	E11	5000K	Clear	50W	650	0.06A	100 LPW	Ceramic / Polycarbonate	Box
S12340	6.5W	E11	3000K	Frost	50W	600	0.06A	92 LPW	Ceramic / Polycarbonate	Box
S12341	6.5W	E11	5000K	Frost	50W	600	0.06A	92 LPW	Ceramic / Polycarbonate	Box
T6 - E12 Base										
S12134	5W	E12	3000K	Clear	40W	550	0.05A	110 LPW	Ceramic / Polycarbonate	Carded
S12135	5W	E12	5000K	Clear	40W	550	0.05A	110 LPW	Ceramic / Polycarbonate	Carded
S12342	5W	E12	3000K	Clear	40W	550	0.05A	110 LPW	Ceramic / Polycarbonate	Box
S12343	5W	E12	5000K	Clear	40W	550	0.05A	110 LPW	Ceramic / Polycarbonate	Box
S12344	5W	E12	3000K	Frost	40W	500	0.05A	100 LPW	Ceramic / Polycarbonate	Box
S12345	5W	E12	5000K	Frost	40W	500	0.05A	100 LPW	Ceramic / Polycarbonate	Box
S12346	6.5W	E12	3000K	Clear	50W	650	0.06A	100 LPW	Ceramic / Polycarbonate	Box
S12347	6.5W	E12	5000K	Clear	50W	650	0.06A	100 LPW	Ceramic / Polycarbonate	Box
S12348	6.5W	E12	3000K	Frost	50W	600	0.06A	92 LPW	Ceramic / Polycarbonate	Box
S12349	6.5W	E12	5000K	Frost	50W	600	0.06A	92 LPW	Ceramic / Polycarbonate	Box

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Lamps may not be compatible with all dimmers.


Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.


Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <http://www.P65Warnings.ca.gov>.

DIMENSIONS/WEIGHTS


Item	MOL (A)	MOD (B)	Weight
S12132	2.32"	0.75"	0.05 Lbs.
S12133	2.32"	0.75"	0.05 Lbs.
S12334	2.32"	0.75"	0.05 Lbs.
S12335	2.32"	0.75"	0.05 Lbs.
S12336	2.32"	0.75"	0.05 Lbs.
S12337	2.32"	0.75"	0.05 Lbs.
S12338	2.83"	0.75"	0.06 Lbs.
S12339	2.83"	0.75"	0.06 Lbs.
S12340	2.83"	0.75"	0.06 Lbs.
S12341	2.83"	0.75"	0.06 Lbs.
S12134	2.32"	0.75"	0.06 Lbs.
S12135	2.32"	0.75"	0.06 Lbs.
S12342	2.32"	0.75"	0.06 Lbs.
S12343	2.32"	0.75"	0.06 Lbs.
S12344	2.32"	0.75"	0.06 Lbs.
S12345	2.32"	0.75"	0.06 Lbs.
S12346	2.91"	0.75"	0.07 Lbs.
S12347	2.91"	0.75"	0.07 Lbs.
S12348	2.91"	0.75"	0.07 Lbs.
S12349	2.91"	0.75"	0.07 Lbs.




S12132-S12133
S12334-S12337



S12338-S12341



S12134-S12135
S12342-S12345

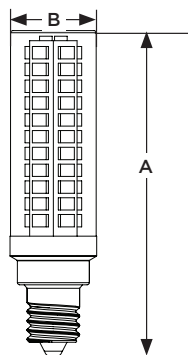

S12346-S12349

**SCAN BELOW FOR OTHER PIN BASED AND
MINIATURE REPLACEMENT CATEGORIES:**



12V G4 and GY6.35
SA3059



120V G8, G9, and GY6.35
SA3061



Single & Double contact
SN1645