


BLINK®

SURFACE MOUNTED DOWNLIGHTS

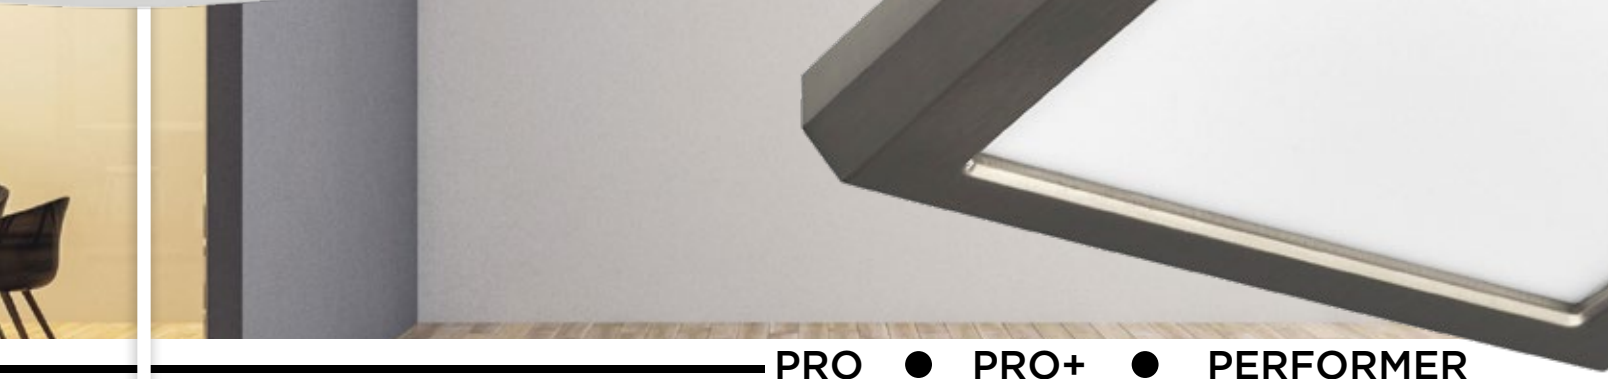

PRO ● PRO+ ● PERFORMER

 **SATCO® | NUVO®**

BLINK® SERIES

SETTING THE STANDARD IN PROFESSIONAL LIGHTING

BLINK's LED fixture program offers a diverse range of lighting solutions with a focus on quality and performance. Featuring a graceful design with die-cast aluminum construction, quick installation brackets, and compliance for reliability and adaptability in various settings.

THE DIFFERENCE IS IN THE DRIVER

BLINK's external drivers boast advanced componentry that better regulate the electricity flowing to the LED chips, preventing electrical interference, overloading, and overheating. While some DOB (driver on board) flush mount fixtures may be an option, many don't offer the same level of performance, efficiency, and longevity as an external driver.

The external driver design extends the lifespan of our fixtures, setting them apart from DOB products that tend to experience premature driver failure and flickering due to inadequate filtering componentry. Furthermore, our external drivers are designed to match the precise needs of our LED fixtures, resulting in superior efficiency. Plus, the added componentry delivers improved dimming capabilities, which simply isn't possible to achieve with DOB designs due to limited space.




External Driver



Low Profile External Driver



Low Profile External Driver

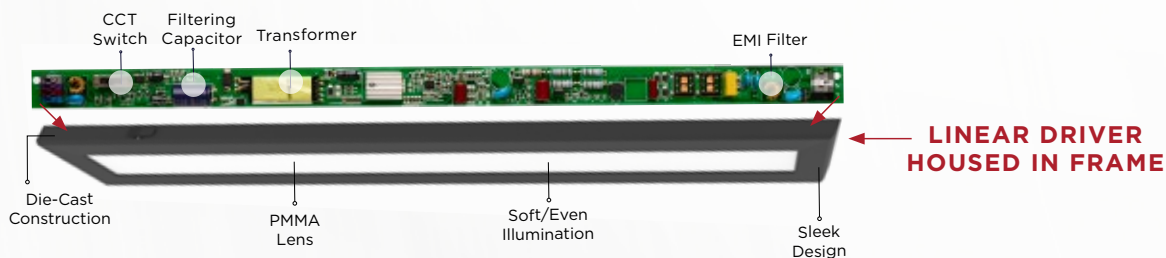

All Blink products are currently ENERGY STAR certified. The current ENERGY STAR program will terminate on 12/31/24. Blink products can continue to be sold with the ENERGY STAR markings but are no longer supported by the program. In 2025 and forward only 5' & 7" round & square and 9" round Blink products will have a new ENERGY STAR certification as a surface mount downlight.



SCAN TO VIEW MORE INFORMATION ABOUT BLINK® SERIES


BLINK® PRO EM BATTERY BACKUP

In critical lighting situations, the BLINK® Pro EM Backup provides peace of mind while seamlessly integrating with the BLINK® Pro Series.

EM SPECIFICATIONS

- Alert Function
- Test Indicator Combo Button
- 90 Minute Battery Run Time
- Quick-Snap Installation

- **Green:** Fully Charged
- **Blinking Red:** Service Battery
- **Red:** Indicates Charging

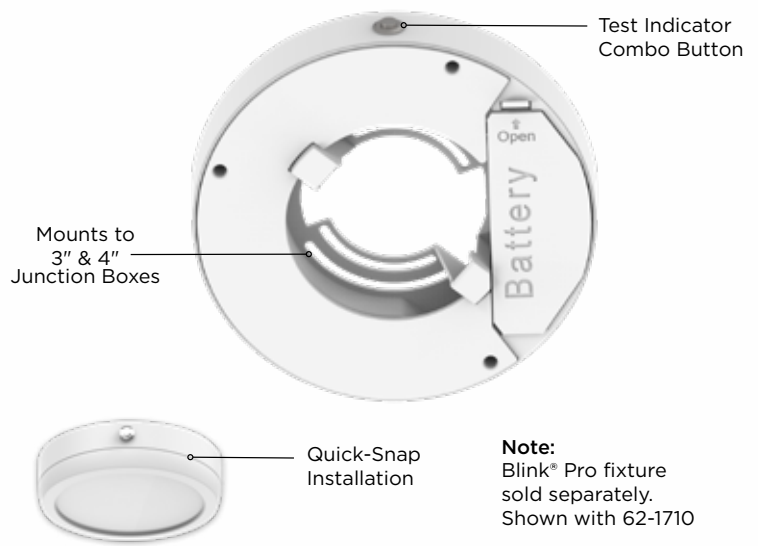

BLINK® PRO EXTENSION COLLARS

SQUARE & ROUND OPTIONS

Extension Collars for shallow box installations or to match profile of BLINK® Pro with EM Models.

Extension Collars come in White, Black, Brushed Nickel and Bronze Finishes.



BLINK® SERIES | MOUNTING BRACKETS

FOR SIMPLE INSTALLATION

The inclusion of a removable mounting bracket for all models simplifies the mounting procedure, allowing for quick and hassle-free installation. The fixture retaining clips effortlessly slide and lock into place on the mounting plates, ensuring a secure and solid fit. The end result is a clean and seamless appearance.



BLINK® PRO

EXTERNAL DRIVER WITH ENHANCED FILTERING

BLINK® Pro is a versatile offering, suitable for nearly every environment. Encompassed in the sophisticated driver platform, advanced line conditioners and EMI filters ensure smooth even light distribution and dimming.

Features

- 5 CCT Selectable
2700K/3000K/3500K/4000K/5000K
- Available in 120V and 120V/277V
- Emergency Backup Options
- Enhanced Driver Filtering
- Built-In 2.5KV Surge Protection
- Quick-Install Mounting Brackets
- Chamfered Bezel Die-Cast Construction

Blink® Pro 5", 7", and 9" Available Finishes



White



Black




Bronze



Brushed Nickel



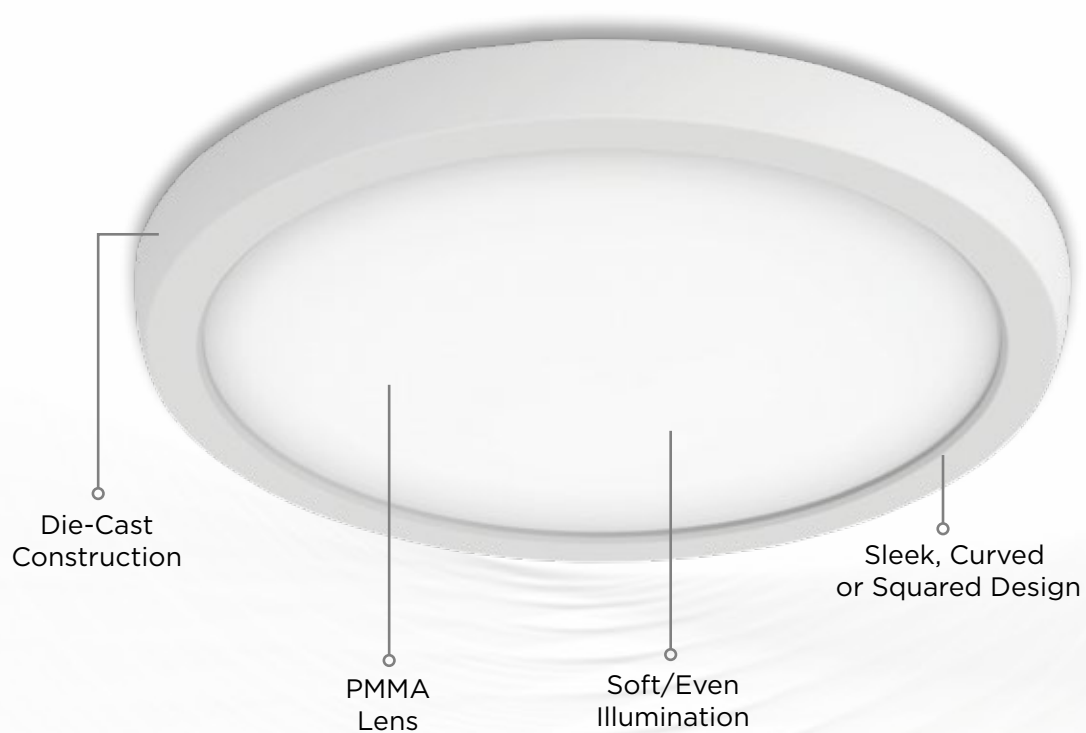

120V Model Specifications

Volts	120V
CCT	5 CCT Selectable - 2700K/3000K/3500K/4000K/5000K
Driver	External
Dimming	Yes, Triac
EM Back Up Compatible	Yes - Compatible with BLINK® Pro Emergency Backup 120/277V Model
Available Accessories	Extension Collars, EM Battery Backup Module



Complies with NEC 410.16(A)(3) & NEC 410.16(C)(5) Certified under UL 1598, suitable for clothes closet installation.

✓ = 5" & 7" Comply for Zero Clearance Applications

* = Consult NEC Code for Dimensional Parameters for installation in clothes closets.


SPECIFICATIONS

ACCESSORIES

Item	Size	Shape	Finish	Watts	Lumens	Efficacy (Up to LPW)	Input Current @ 120V	Closet Rated	EM Backup	Replacement Battery	Extension Collar
62-1700	5"	Round	White	9W	700-780lm	86.67	0.075A	✓	N/A	N/A	25-1700
62-1701	5"	Round	Black	9W	650-680lm	75.56	0.075A	✓	N/A	N/A	25-1701
62-1702	5"	Round	Bronze	9W	650-680lm	75.56	0.075A	✓	N/A	N/A	25-1702
62-1703	5"	Round	Br. Nickel	9W	650-680lm	75.56	0.075A	✓	N/A	N/A	N/A
62-1710	7"	Round	White	11W	980-1050lm	95.45	0.092A	✓	62-1710/EM	25-9004	25-1710
62-1711	7"	Round	Black	11W	900-950lm	86.36	0.092A	✓	62-1711/EM	25-9004	25-1711
62-1712	7"	Round	Bronze	11W	900-950lm	86.36	0.092A	✓	62-1712/EM	25-9004	25-1712
62-1713	7"	Round	Br. Nickel	11W	900-950lm	86.36	0.092A	✓	62-1713/EM	25-9004	25-1713
62-1720	9"	Round	White	13W	1300-1320lm	101.54	0.108A	*	62-1720/EM	25-9005	25-1720
62-1721	9"	Round	Black	13W	1200-1250lm	96.15	0.108A	*	62-1721/EM	25-9005	25-1721
62-1722	9"	Round	Bronze	13W	1200-1250lm	96.15	0.108A	*	62-1722/EM	25-9005	25-1722
62-1723	9"	Round	Br. Nickel	13W	1200-1250lm	96.15	0.108A	*	62-1723/EM	25-9005	25-1723
62-1704	5"	Square	White	9W	680-730lm	81.11	0.075A	✓	N/A	N/A	25-1704
62-1705	5"	Square	Black	9W	600-680lm	75.56	0.075A	✓	N/A	N/A	25-1705
62-1706	5"	Square	Bronze	9W	600-680lm	75.56	0.075A	✓	N/A	N/A	25-1706
62-1707	5"	Square	Br. Nickel	9W	600-680lm	75.56	0.075A	✓	N/A	N/A	N/A
62-1714	7"	Square	White	11W	940-1000lm	90.91	0.092A	✓	62-1714/EM	25-9004	25-1714
62-1715	7"	Square	Black	11W	800-850lm	77.27	0.092A	✓	62-1715/EM	25-9004	25-1715
62-1716	7"	Square	Bronze	11W	800-850lm	77.27	0.092A	✓	62-1716/EM	25-9004	25-1716
62-1717	7"	Square	Br. Nickel	11W	800-850lm	77.27	0.092A	✓	62-1717/EM	25-9004	25-1717
62-1724	9"	Square	White	13W	1200-1300lm	100.00	0.108A	*	62-1724/EM	25-9005	25-1724
62-1725	9"	Square	Black	13W	1032-1150lm	88.46	0.108A	*	62-1725/EM	25-9005	25-1725
62-1726	9"	Square	Bronze	13W	1032-1150lm	88.46	0.108A	*	62-1726/EM	25-9005	25-1726
62-1727	9"	Square	Br. Nickel	13W	1032-1150lm	88.46	0.108A	*	62-1727/EM	25-9005	25-1727

DIMENSIONS - 120V MODELS

(A) Diameter/Length	(B) Inside Diameter/Length	(C) Trim Height	(D) Overall Height	(E) Driver Height	(F) Driver Diameter
5" Round	3.62"	0.67"	1.59"	.92"	2.36"
7" Round	5.62"	0.67"	1.59"	.92"	2.36"
9" Round	7.62"	0.67"	1.59"	.92"	2.36"
5" Square	3.62"	0.67"	1.59"	.92"	2.36"
7" Square	5.62"	0.67"	1.59"	.92"	2.36"
9" Square	7.62"	0.67"	1.59"	.92"	2.36"

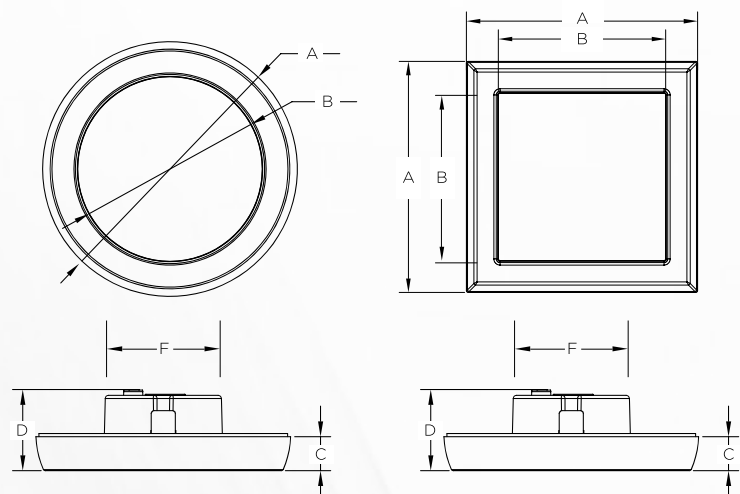

BLINK® PRO 0-10V EM CAPABLE

ITEM SPECIFICATIONS

EM 120V/277V Model Specifications

Volts	120V/277V
Driver	External
Dimming	Yes, 0-10V
EM Back Up Compatible	Yes - Compatible with BLINK® Pro Emergency Backup 120/277V Model
Available Accessories	Extension Collars, EM Battery Backup Module

Only compatible with Blink® Pro 0-10V Emergency Battery Backup Units

* = Consult NEC Code for Dimensional Parameters for installation in clothes closets.

SPECIFICATIONS

ACCESSORIES

Item	Size	Shape	Finish	Watts	Lumens	CCT	Efficacy (LPW)	Input Current @ 120 / 277V	Closet Rated	EM Backup	Replacement Battery	Extension Collar
62-1746	7"	Round	White	11W	980lm	3000K	89.09	0.092/0.040A	*	62-1746/EM	25-9004	25-1710
62-1748	7"	Round	White	11W	980lm	4000K	78.40	0.104/0.045A	*	62-1746/EM	25-9004	25-1710
62-1756	9"	Round	White	13W	1300lm	3000K	92.31	0.108/0.047A	*	62-1756/EM	25-9005	25-1720
62-1758	9"	Round	White	13W	1300lm	4000K	76.47	0.142/0.061A	*	62-1756/EM	25-9005	25-1720
62-1747	7"	Square	White	11W	940lm	3000K	92.31	0.092/0.040A	*	62-1747/EM	25-9004	25-1714
62-1749	7"	Square	White	11W	940lm	4000K	75.20	0.104/0.045A	*	62-1747/EM	25-9004	25-1714
62-1757	9"	Square	White	13W	1200lm	3000K	92.31	0.108/0.047A	*	62-1757/EM	25-9005	25-1724
62-1759	9"	Square	White	13W	1200lm	4000K	70.59	0.142/0.061A	*	62-1757/EM	25-9005	25-1724

BLINK® PRO 0-10V NON-EM

ITEM SPECIFICATIONS

NON EM 120V/277V Model Specifications



Volts	120V/277V
Driver	External
Dimming	Yes, 0-10V
EM Back Up Compatible	No - Not to be used with Blink® Pro 0-10V Emergency Battery Backup Units

* = Consult NEC Code for Dimensional Parameters for installation in clothes closets.

Item	Size	Shape	Finish	Watts	Lumens	CCT	Efficacy (LPW)	Input Current @ 120 / 277V	Extension Collar Accessory	Closet Rated
62-1718	7"	Round	White	11W	980lm	3000K	89.09	0.092/0.040A	25-1710	*
62-1733	7"	Round	White	11W	980lm	4000K	78.40	0.104/0.045A	25-1710	*
62-1728	9"	Round	White	13W	1300lm	3000K	92.31	0.108/0.047A	25-1720	*
62-1743	9"	Round	White	13W	1300lm	4000K	76.47	0.142/0.061A	25-1720	*
62-1719	7"	Square	White	11W	940lm	3000K	92.31	0.092/0.040A	25-1714	*
62-1734	7"	Square	White	11W	940lm	4000K	75.20	0.104/0.045A	25-1714	*
62-1729	9"	Square	White	13W	1200lm	3000K	92.31	0.108/0.047A	25-1724	*
62-1744	9"	Square	White	13W	1200lm	4000K	70.59	0.142/0.061A	25-1724	*

DIMENSIONS - 120V/277V MODELS

(A) Diameter/Length	(B) Inside Diameter/Length	(C) Trim Height	(D) Overall Height	(E) Driver Height	(F) Driver Diameter
7" Round	5.62"	0.67"	1.20"	.83"	2.36"
9" Round	7.62"	0.67"	1.20"	.83"	2.36"
7" Square	5.62"	0.67"	1.20"	.83"	2.36"
9" Square	7.62"	0.67"	1.20"	.83"	2.36"



BLINK® PRO+ LARGE FOOTPRINT ENHANCED DRIVER

BLINK® Pro+ raises the bar for professional lighting with its sleek design, large footprint and advanced technology. Available in various shapes and sizes, BLINK® Pro+ seamlessly melds with a wide range of environments.

Features

- 5 CCT Selectable
2700K/3000K/3500K/4000K/5000K
- Built-In 2.5KV Surge Protection
- Enhanced Driver Filtering
- Quick-Install Mounting Brackets
- Chamfered Bezel Die-Cast Construction
- Offered in Large Diameter, Square, or Linear Models

Blink® Pro + Series Available Finishes




White



Black



Brushed Nickel*

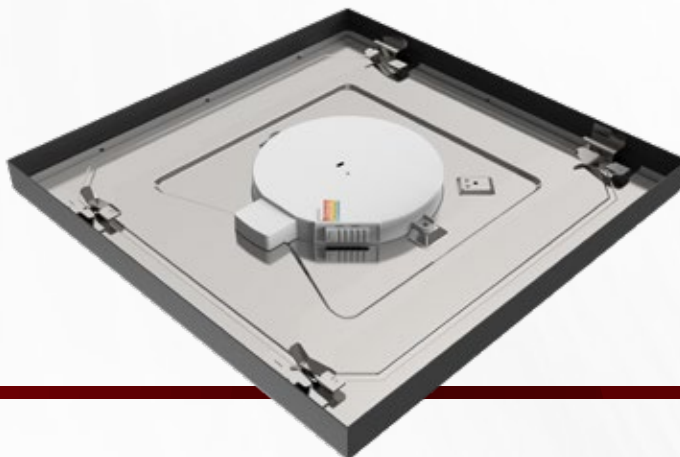




120V/277V Model Specifications





Volts	120V/277V
CCT	5 CCT Selectable - 2700K/3000K/3500K/4000K/5000K
Driver	Low Profile External for Round and Square or Internally Frame Mounted for Linear
Dimming	Yes, 120V Triac Only
EM Back Up Compatible	No

Item	Size	Shape	Finish	Watts	Lumens	Efficacy (Up to LPW)	Input Current @ 120/277V
62-1776	D:12"	Round	White	19.5W	1450L-1520L	77.95	0.163/0.070A
62-1777	D:15"	Round	White	29W	2200L-2320L	80.00	0.242/0.105A
62-1778	D:19"	Round	White	34W	2600L-2740L	80.59	0.283/0.123A
62-1786	D:12"	Round	Black	19.5W	1350L-1420L	72.82	0.163/0.070A
62-1787	D:15"	Round	Black	29.5W	2100L-2220L	75.25	0.246/0.106A
62-1788	D:19"	Round	Black	34W	2500L-2640L	77.65	0.283/0.123A
62-1796	D:12"	Round	Brushed Nickel	19.5W	1350L-1470L	75.40	0.163/0.070A
62-1779	L:12" W:12"	Square	White	19.5W	1400L-1470L	75.38	0.163/0.070A
62-1789	L:12" W:12"	Square	Black	19.5W	1300L-1370L	70.26	0.163/0.070A
62-1799	L:12" W:12"	Square	Brushed Nickel	19.5W	1300L-1410L	72.30	0.163/0.070A
62-1774	L:24" W:24"	Square	White	47W	3600L-4050L	86.17	0.392/0.170A
62-1784	L:24" W:24"	Square	Black	47W	3550L-3900L	82.98	0.392/0.170A
62-1770	L:24" W:5.5"	Rectangular	White	24W	1650L-1870L	77.92	0.2/0.087A
62-1771	L:36" W:5.5"	Rectangular	White	32W	2150L-2400L	75.00	0.267/0.116A
62-1772	L:48" W:5.5"	Rectangular	White	42W	2850L-3100L	73.81	0.35/0.152
62-1780	L:24" W:5.5"	Rectangular	Black	24W	1600L-1750L	72.92	0.2/0.087A
62-1781	L:36" W:5.5"	Rectangular	Black	32W	2100L-2300L	71.88	0.267/0.115A
62-1782	L:48" W:5.5"	Rectangular	Black	42W	2800L-2950L	70.24	0.350/0.152A
62-1773	L:12" W:24"	Rectangular	White	24W	1650L-1900L	79.17	0.2/0.087A
62-1775	L:12" W:48"	Rectangular	White	47W	3500L-4050L	86.17	0.392/0.170A
62-1783	L:12" W:24"	Rectangular	Black	24W	1650L-1850L	77.08	0.2/0.087A
62-1785	L:12" W:48"	Rectangular	Black	47W	3450L-3800L	80.85	0.392/0.170A

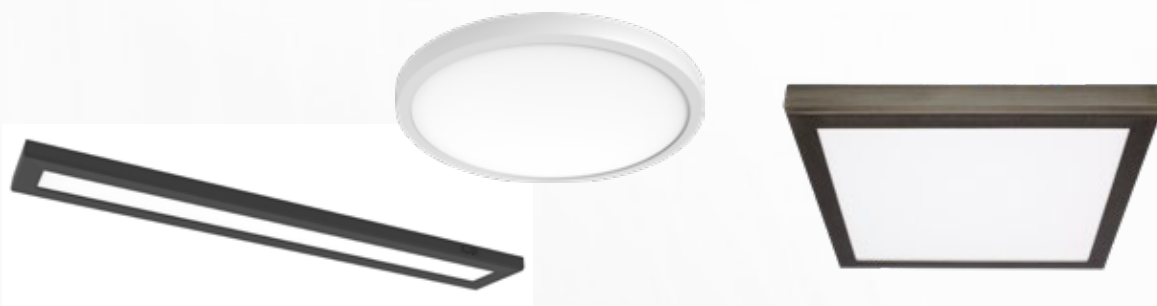

DIMENSIONS - 120V/277V MODELS

Item	(A) Diameter/Length	(B) Width	(C) Height
62-1779	12"	12"	1.06"
62-1789	12"	12"	1.06"
62-1799	12"	12"	1.06"
62-1776	12"	-	1.06"
62-1777	15"	-	1.06"
62-1778	19"	-	1.06"
62-1786	12"	-	1.06"
62-1787	15"	-	1.06"
62-1788	19"	-	1.06"
62-1796	12"	-	1.06"
62-1773	23.70"	11.83"	1.06"
62-1783	23.70"	11.83"	1.06"
62-1774	23.70"	23.70"	1.06"
62-1784	23.70"	23.70"	1.06"
62-1770	23.98"	5.61"	1.06"
62-1780	23.98"	5.61"	1.06"
62-1771	35.98"	5.61"	1.06"
62-1781	35.98"	5.61"	1.06"
62-1772	47.72"	5.61"	1.06"
62-1782	47.72"	5.61"	1.06"
62-1775	47.72"	11.83"	1.06"
62-1785	47.72"	11.83"	1.06"

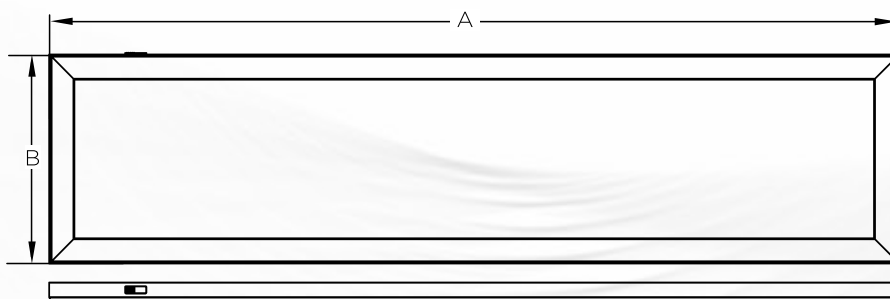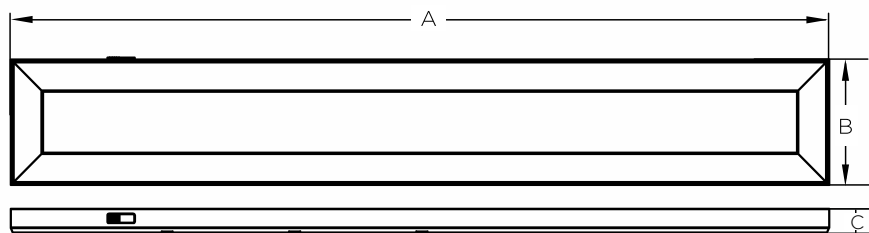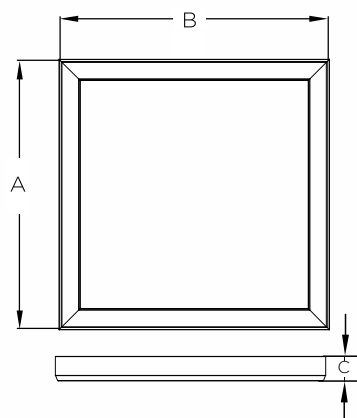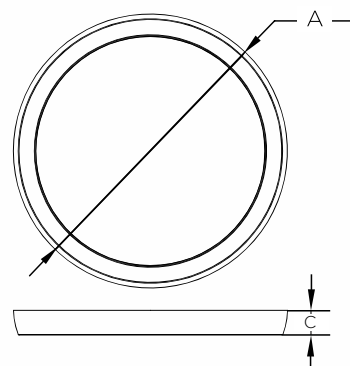

BLINK® PERFORMER

FLAT BACK LOW PROFILE DRIVER

BLINK® Performer combines exceptional quality and designer die-cast aluminum construction for durability and aesthetics. With innovative features, it offers reliability and adaptability across diverse applications. BLINK® Performer models also feature a low-profile driver with flat back for shallow J-boxes, without the need for an extension collar.

Features

- 5 CCT Selectable
2700K/3000K/3500K/4000K/5000K
- Built-In 2.5KV Surge Protection
- Enhanced Driver Filtering
- Quick-Install Mounting Brackets
- Chamfered Bezel Die-Cast Construction
- Flat Back Design

Blink® Performer 5", 7", and 9" Available Finishes



White



Black




Bronze



Brushed Nickel



ColorQuick®
Selectable Color Technology

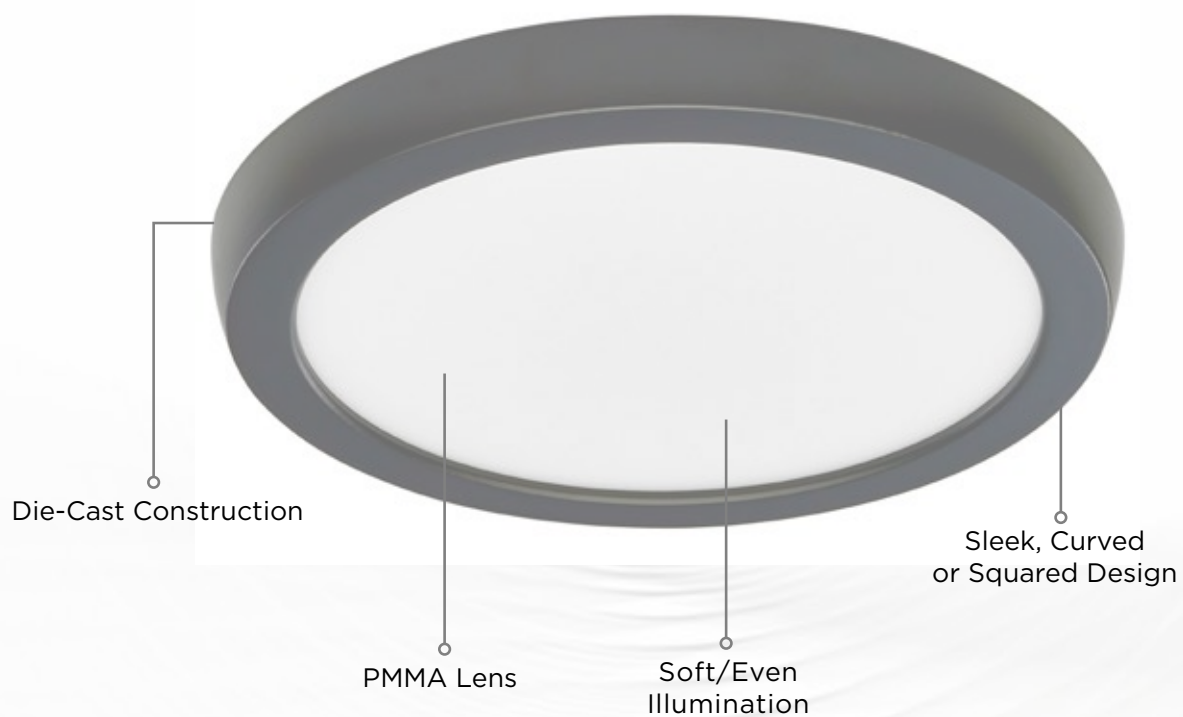

120V Model Specifications



Volts	120V
CCT	5 CCT Selectable - 2700K/3000K/3500K/4000K/5000K
Driver	Low Profile Driver Flat Back
Dimming	Yes, 120V Triac Only
EM Back Up Compatible	No

Item	Size	Shape	Finish	Watts	Lumens	Efficacy (Up to LPW)	Input Current @ 120
62-1900	5"	Round	White	8W	700L-730L	91.25	0.067A
62-1901	5"	Round	Black	8W	650L-680L	85	0.067A
62-1902	5"	Round	Bronze	8W	650L-680L	85	0.067A
62-1903	5"	Round	Brushed Nickel	8W	650L-680L	85	0.067A
62-1910	7"	Round	White	10W	900L-980L	98	0.083A
62-1911	7"	Round	Black	10W	850L-930L	93	0.083A
62-1912	7"	Round	Bronze	10W	850L-930L	93	0.083A
62-1913	7"	Round	Brushed Nickel	10W	850L-930L	93	0.083A
62-1920	9"	Round	White	11W	1050L-1150L	104.55	0.092A
62-1921	9"	Round	Black	11W	1000L-1050L	95.45	0.092A
62-1922	9"	Round	Bronze	11W	1000L-1050L	95.45	0.092A
62-1923	9"	Round	Brushed Nickel	11W	1000L-1050L	95.45	0.092A
62-1904	5"	Square	White	8W	680L-730L	91.25	0.067A
62-1905	5"	Square	Black	8W	600L-650L	81.25	0.067A
62-1906	5"	Square	Bronze	8W	600L-650L	81.25	0.067A
62-1907	5"	Square	Brushed Nickel	8W	600L-650L	81.25	0.067A
62-1914	7"	Square	White	10W	900L-980L	98	0.083A
62-1915	7"	Square	Black	10W	850L-900L	90	0.083A
62-1916	7"	Square	Bronze	10W	850L-900L	90	0.083A
62-1917	7"	Square	Brushed Nickel	10W	850L-900L	90	0.083A
62-1924	9"	Square	White	11W	1050L-1100L	100	0.092A
62-1925	9"	Square	Black	11W	1000L-1050L	95.45	0.092A
62-1926	9"	Square	Bronze	11W	1000L-1050L	95.45	0.092A
62-1927	9"	Square	Brushed Nickel	11W	1000L-1050L	95.45	0.092A



DIMENSIONS - 120V MODELS

(A) Diameter/Length	(B) Inside Diameter/Length	(C) Trim Height	(D) Overall Height
5" Round	3.62"	0.67"	.74"
7" Round	5.62"	0.67"	.74"
9" Round	7.62"	0.67"	.74"
5" Square	3.62"	0.67"	.74"
7" Square	5.62"	0.67"	.74"
9" Square	7.62"	0.67"	.74"

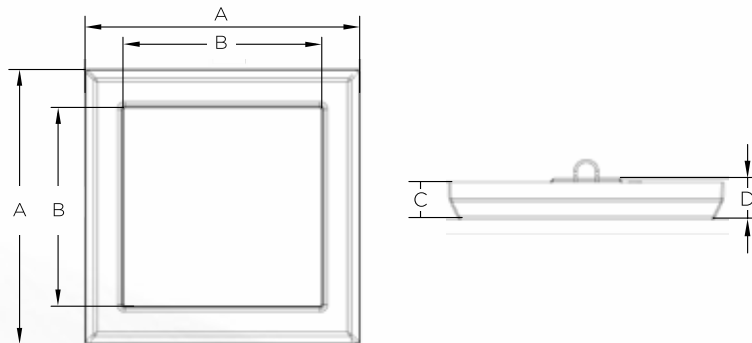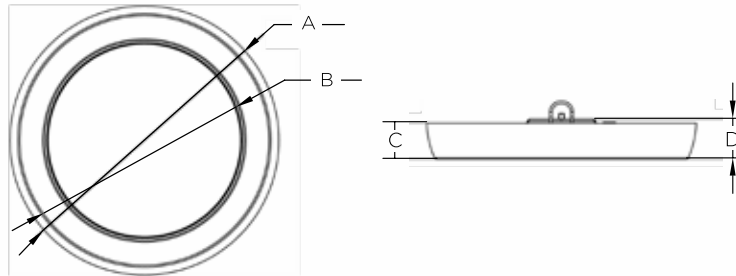

To learn more about SATCO|NUVO, visit www.satco.com or contact 1-800-437-2826



Like us on Facebook



Connect with us on LinkedIn



Follow us on Instagram

National Toll-Free: 1.800.43.SATCO (1.800.437.2826)

Corporate Offices &

Distribution Center: **NEW YORK** 110 Heartland Blvd., Brentwood, NY 11717 | 800.437.2826 | 631.243.2022 | Fax 631.243.2027

Distribution Centers: **FLORIDA** 1694 NW 215th St. Miami Gardens, FL 33056 | Tel. 305.624.2044 FAX 305.623.0286

CALIFORNIA 31288 San Benito St. Hayward, CA 94544 | Tel. 510.487.4822 FAX 510.487.8955

WASHINGTON 4710 116th St. S.W., Mukilteo, WA 98275 | Tel. 425.789.3300 FAX 425.789.3310

TEXAS 2000 Valwood Parkway, Farmers Branch, TX 75234 | Tel. 972.247.2437 FAX 972.247.5408

PUERTO RICO Campeche St. 23, Julio N. Matos Industrial Park, Carolina, PR 00984 | Tel. 787.757.3510 FAX 787.757.3540

Due to rapid advancements in LED technology, product specifications and availability are subject to change without notice. Please visit us online at www.satco.com for our full product line and ordering details, or consult factory for additional information

